



# GUNDLACH



## QUALITY INSTALLATION TOOLS FOR

- Resilient Floorcoverings • Carpeting
- Ceramic Wall and Floor Tile
- Metal Mouldings
- Plastic Laminate Countertopping



DISTRIBUTED BY:

**BENO J. GUNDLACH COMPANY**

P.O. Box 544 • Office & Plant 211 N. 21st St.  
Belleville, Illinois 62222  
Area Code 618 • 233-1781

**Catalog  
118**



# GUNDLACH Sales Policy and General Information

<b>Ordering</b>	Stock Numbers, and Item and Size Descriptions, should be correctly listed to avoid the possibility of a shipping delay required to clarify any doubtful matters. For the same reason, hand written orders should be as legible as possible.
<b>Prices</b>	Prices shown on the Price List are effective on the date indicated; however, they are SUBJECT TO CHANGE WITHOUT NOTICE, although every effort is made to maintain them.
<b>Delivery</b>	We constantly strive to ship all orders promptly. Sometimes though, delays occur as a result of broken delivery promises from our suppliers and from unusually active sales activity on some items. If such a delay would be unduly long, the customer would be contacted regarding the possibility of authorizing a Back Order.
<b>Credit</b>	For Open Account Status initially, either an acceptable D&B rating or satisfactory references from major suppliers is required. Prompt payment of invoices is necessary to continue an established Open Account Status. Those not qualifying for Open Account are either C.O.D. or Cash with Order.
<b>Routing</b>	In the absence of your specific instructions, we select the best of Motor Freight, Commercial Bus, United Parcel Service, and Parcel Post.
<b>Loss or Damage in Transit</b>	BY LAW, Title for goods transfers to a Customer when accepted by a Common Carrier, and the Carrier is responsible to the Customer for loss and/or damage occurring in transit. Therefore, we cannot be liable for any loss and/or damage that occurs in transit. FOR HIS PROTECTION, A CUSTOMER MUST HAVE LOSS AND/OR DAMAGE NOTED ON THE FREIGHT BILL AT THE TIME OF DELIVERY. In the case of concealed damage and/or loss discovered subsequent to delivery, a customer must obtain a concealed damage and/or loss report from the delivering Carrier before a Claim can be filed. It is the responsibility of the Customer to file a Claim, although we will render all possible assistance in such cases.
<b>Packing Errors</b>	These seldom occur, as our shipping personnel are thoroughly experienced and capable of packing your valued orders extremely carefully and accurately. However, if on rare occasions a shortage or overage should occur, this should be reported immediately upon receipt and unpacking of the shipment. We keep accurate scale weights of all of the cartons in all of our shipments. As a consequence, we can tell from our records if all items on an order were actually shipped. We also keep the record of the contents of each carton in a shipment. Therefore, if an apparent shortage seems to exist, we can be of assistance in verifying whether this is actually the case or not.
<b>Returns</b>	Contact us first for authorization, as it may not be necessary to return an item to solve the problem. Shipping charges must be prepaid on returned items. All returned items are first subject to inspection before credit can be issued. A 15% restocking charge applies on returned items where we were not at fault.
<b>Guarantees</b>	All products are guaranteed to be free from manufacturing defects when delivered to the Carrier. Products NOT of our manufacture are guaranteed in accordance with the guarantees extended by the particular manufacturer, and decisions relating to claims on such products are subject to the inspection and approval by the manufacturer. Contact us before making any returns for authorization and shipping instructions. Distributors are NOT authorized to make replacements of claimed defective products without first receiving permission from us to do so.
<b>Replacement Parts</b>	Replacement parts are available for almost all of the items shown in this catalog. Both an illustrated, and non-illustrated, Gundlach Parts List are available as an aid to ordering parts.




# GUNDLACH MODEL H-76 'ALL PURPOSE' FLOOR TILE CUTTER

THIS CUTTER HAS A LONGER BASE CASTING THAT BETTER ACCOMMODATES 12" TILE—WITHOUT SACRIFICING THE TIME TESTED AND PROVEN FEATURES THAT HAVE EARNED IT THE REPUTATION OF BEING ABSOLUTELY THE BEST ON THE MARKET—AND THE LEAST EXPENSIVE TO OWN OVER THE LONGER TERM.

Lock Nuts hold the Thumb Screws in position - thereby preventing annoying and time consuming changes in the shear angle adjustment.

Tough tool steel Blades - precision ground, specially heat treated, and "razor sharp" hand honed - for best available cutting performance. Easily replaceable after years of service.

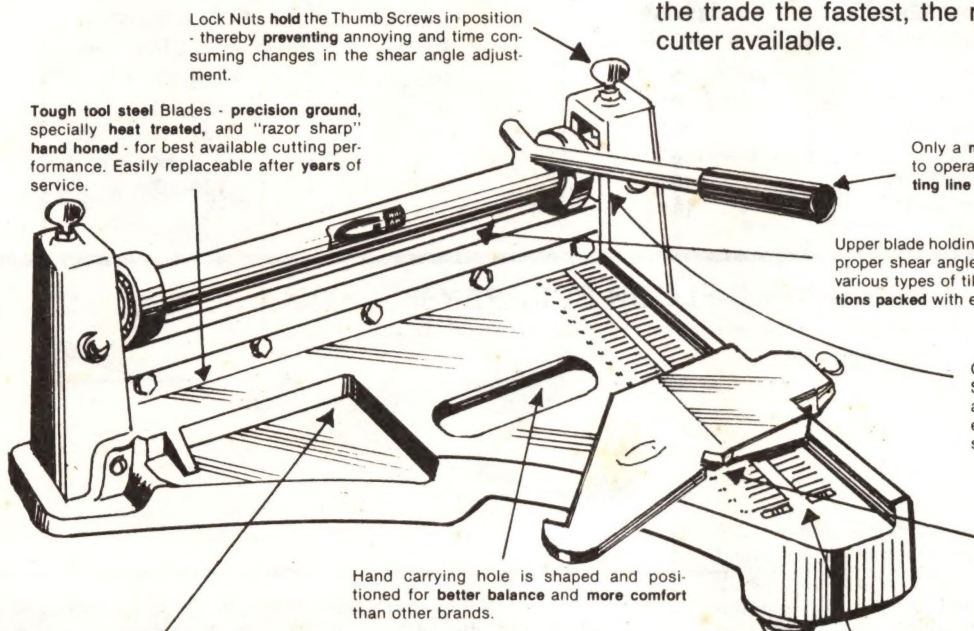

Cuts clean edges on all types of resilient floor tiles. This includes Asphalt (without preheating), Vinyl Composition, Rubber, Cork, Linoleum, Solid Vinyl, Felt-Backed Vinyl, and Marble Translucent Vinyl. Can also be used for the new types of Marble Chip Epoxy Tiles.

Expertly designed (including tile layers' recommendations) to give the trade the fastest, the most convenient, and the most durable cutter available.

169.95

Only a minimum amount of motion required to operate this spring returned handle. Cutting line stays in full view.

Upper blade holding bar adjusts quickly to the proper shear angle and depth of cut for the various types of tiles. Easy to follow instructions packed with each cutter.

Graphite treated steel (not soft die cast metal) Slide Bearings at both ends for minimum wear and positive retention of blade alignment for easier and cleaner cutting of tough-to-cut solid vinyl tile.

Precision diecast gauge for accurate 45° and 90° cuts. Can be adjusted in only seconds to the desired setting. Notch at rear acts as a wrench for the shear angle thumb screw Lock Nuts - another convenient exclusive Gundlach feature.

Hand carrying hole is shaped and positioned for better balance and more comfort than other brands.

Exclusive offset table design permits holding the tile throughout the entire cutting operation! Eliminates time loss and aggravation from picking up cut tile from a flat table with worn fingernails.

Three 1" ball type Casters are optionally available for smooth and easy moving on the job. Casters leave no marks, and move instantly in any direction. Without Casters, Cutter rests on 3 raised and beveled spots that eliminate bumping and chipping of uneven tiles.

Longer Table features both an inch and a metric scale. Gauge can be set for all sizes of lateral cuts—from maximum to absolute minimum.

## SPECIFICATIONS

CUTTING CAPACITY	1/4" Thickness 12 1/4" Width	OVERALL SIZE	18" Wide x 18 1/2" Long x 8" High
WEIGHT	Only 20 lbs. with Casters	CONSTRUCTION	Sturdy aluminum alloy castings and steel

## STOCK NUMBER INFORMATION


No. H-76-1—Tile Cutter w/Casters  
No. H-76-2—Tile Cutter w/out Casters

No. H-76-3—Replacement Upper Blade  
No. H-76-4—Replacement Lower Blade

No. H-76-5—Casters, 3/Set, w/Screws\*  
No. H-76-6—Replacement Adjustable Gauge

\* These casters are for the No. H-76 model that has a longer base casting and the dual metric-inch scales.

## SEMI-PRO FLOOR TILE CUTTER

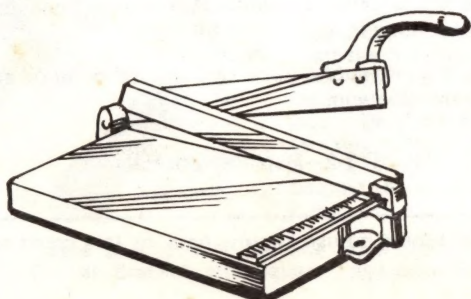


### No. KA-12 "KUT-ALL" TILE CUTTER

For all types of 12" x 12" resilient floor tile. The strong cast aluminum base has a calibrated rear ledge for fast measurement of cuts. The hardened steel blades are easily replaced when dull. Can also be used to cut cove base. Cutter weighs only 7 lbs.

No. KA-1—Replacement Upper Blade  
No. KA-2—Replacement Lower Blade



## REPLACEABLE ALL-STEEL FLOOR SCRAPERS

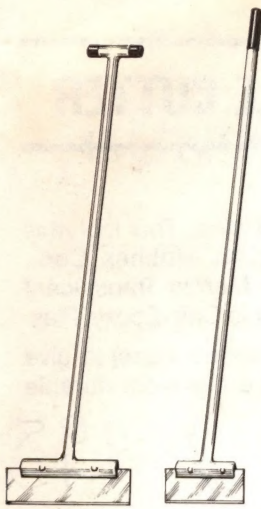

"T" Handle  
54" Long

Straight  
Handle  
59" Long

- For heavy duty and lengthy service! Features a sturdy blade holding bar that adds momentum, and consequent ease, to the scraping work.
- Handle is mounted on a slight angle for "shear action" easier scraping.
- Three blade sizes, for specific job situations. Blades are unbreakable and can be sharpened with a file. Same as Stripper Blades on Page 20.
- The stiff razor-sharp hardened spring steel blades are easily removed for sharpening or replacement. Blade holding bar is threaded—NO NUTS to lose.
- Two handle styles available—Straight and "T"—for user preference. Both models have comfortable plastic hand grips. Scrapers are shipped with blade installed.

SCRAPER STOCK NO.	BLADE WIDTH	HANDLE STYLE	REPLACEMENT BLADE STOCK No.
SCR-6-SH	6"	Straight	148 (or 147)
SCR-10-SH	10"	Straight	130-SB
SCR-16-SH	16"	Straight	131
SCR-6-TH	6"	"T"	148 (or 147)
SCR-10-TH	10"	"T"	130-SB
SCR-16-TH	16"	"T"	131


## LONG HANDLE FLOOR SCRAPERS



**No. F-14** — Gets big jobs done quickly and easily!! It features a 1/32" thick replaceable high carbon spring steel blade, which is securely held by 4 bolts. Ideal for scraping residual rubber on sponge back take-up jobs, or for final slab clean-up work prior to resilient flooring installation. The hardwood handle is smoothly finished and lacquered. Overall length is 59", and weighs 4½ lbs.

**No. RB-14 Replacement Blade** — This is a square edged blade, which is supplied with the No. F-14 Scraper. It is 14" wide x 5" high.

**No. RB-14A Replacement Blade** — This is an optional replacement blade that has an angled leading edge. This type of edge provides a "shearing" action, which is desirable for ceratin types of work.

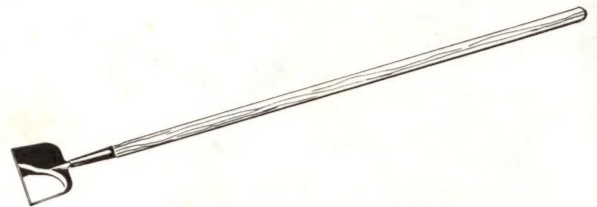

**No. SC** — Used by many mechanics for tile and sheet goods removal work. It is also good for slab clean-up work, and for prying up partially loose carpet or sheet goods.

The heavy duty chisel steel blade is 3/32" x 7" wide x 5½" high. The blade and the tang are a one piece forging. Consequently, this tool should not be compared to lower quality models that have a separate tang welded to a smaller and less rigid blade. Overall length is 52", and weighs 2½ lbs.

## No. HTT HANDY TILE TOOL . . . REMOVES ASPHALT AND VA TILE QUICKLY AND COMFORTABLY!



This patented tool was developed by a tile contractor and his mechanics over a long period of testing and improving. Once you own one you'll find it indispensable because it reduces **both** time **and** fatigue.

Numerous tests proved that it will perform tile removal work, on the average, 4 times faster than old fashioned dry ice or hammer methods.

Extra weight is concentrated down by the 2" wide double end reversible scraping blade. This is what gets the job done! The blade need not leave the floor while working from a comfortable standing position. The blade can be sharpened with a file, and replacements are available.

While this tool was designed primarily for use on concrete subfloors, it can be used on wood subfloors too. With some experience it can also be used to remove linoleum.



No. HTT-1—Replacement Blade

No. HTT-2—Replacement Handle

**Caution:** None of the three Scrapers shown above should be used as pry bars, as this could cause handle breakage.



# The Famous GUNDLACH LINOLEUM ROLLERS . . . the Benchmark of Quality

featuring **ALL STEEL** trouble-free construction

ALL-STEEL construction **guarantees a lifetime** of maintenance free service. Steel will not crack or chip as cast iron can. Neither can anything go wrong with **SOLID STEEL** Roller Sections — **no** bushings of any sort to come loose.

Added to this is the famous Gundlach craftsmanship which is applied throughout to all details of construction.


**USED ON:**

**LINOLEUM • VINYL SHEET GOODS • RUBBER TILE  
VINYL TILE • CORK TILE • WOOD BLOCK TILE  
ROOFING SYSTEMS • WATERPROOFING MEMBRANES**

*For perfect installations, use the size Model specified for these materials by their manufacturers.*

The round yoke cross bar provides maximum carrying comfort for either the one-hand or the two-hand method.

Overall height approximately 41", and overall width 15 1/4". The entire Roller finished in attractive, rust preventing aluminum.



No. 50-AW

50 lb. Attachable Weight, available optionally, merely hooks over the yoke cross bar. Has comfortable carrying handle grip.

Solid steel Handle detaches in only a few seconds. Tapered threads tighten into the base, with a lock nut supplied for optional use.

SOLID STEEL Roller Sections have smooth polished surfaces, and all edges are rounded to protect the flooring material from indentations.

No danger to walls from this Axle, as no part of it extends past the Roller Sections on either side. Graphite application assures quiet, smooth operation. Fastened by a cotter pin on one end for easy removal.

Each Roller Section "floats" independent of the Axle, automatically compensating for sub-floor irregularities. 3-Section design permits easy turning.

## GUNDLACH WHEELY ROLLERS


This offers convenience plus! This is a heavy floor Roller that **can be wheeled**, rather than carried, to the job. When it gets there, without dirt and grime on it, the wheels can be retracted! **A real worksaver!!** Since the wheels come up, rolling both directions is possible. A positive wheel locking system assures safe stair travel. **Make it easy on yourself** — get one the next time you buy a Roller.

No. 75-LR-WH—75 lb. Model No. 100-LR-WH—100 lb. Model  
No. 150-LR-WH—150 lb. Model

## WHEELY ROLLER CONVERSION KITS

You can change your Gundlach Roller into a "Wheely" model with the parts shown to the right. Easy to do. Just disassemble the Roller, and reassemble with the new Yoke. The button-spring clips have already been installed in the new Yoke. Then simply slip the Wheel Assemblies on, and your "Wheely" is ready to go!

No. 75-WH-KT for No. 75-LR | No. 100-WH-KT for No. 100-LR | No. 150-WH-KT for No. 150-LR

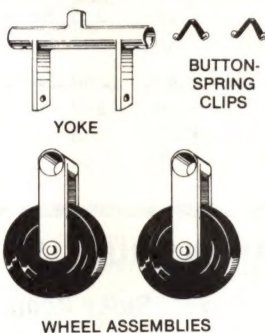


WHEEL ASSEMBLIES




## SEAM and TILE ROLLERS

Widely used for linoleum seam work, "rolling in" asphalt tile hot cuts, and for floor and countertop coving work. The highly polished steel rollers are 2" wide x 2" diam., and are mounted on 2 smooth rolling ball bearings. The steel brackets are case hardened to resist axle wear. The wood handle is shaped for a comfortable grip, and is securely fastened to the brackets. Easily cleaned, these Rollers are 8" long overall, and weigh 2 lbs.

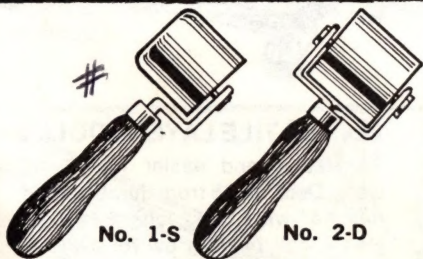

No. 1-S

No. 2-D

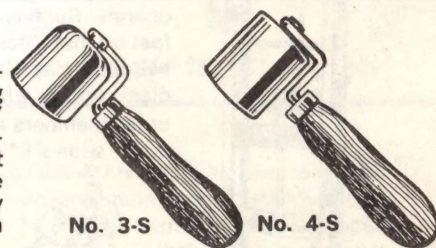

No. 3-S

No. 4-S

No. 1-S — Single Bracket with Outside Edge Only Rounded  
No. 2-D — Double Bracket with Square Edge Both Sides

No. 3-S — Single Bracket with Inside Edge Only Rounded  
No. 4-S — Single Bracket with Square Edge Both Sides




## No. TT GUNDLACH TILE TRUCK...with Larger Noseplate for 12" Tile

A dandy compact Truck specially built for the Resilient Floorcovering Trade. It readily handles small but heavy loads such as cartons of tile, buckets of adhesive, rolls of felt, etc. Hundreds are in use all over the U.S. in Stores, Warehouses, and on Job Locations. Small in size, **BUT** capable of doing a big job!

### Check this further information:

- Compact design permits traveling through crowded aisles and other narrow spaces — also takes less floor space when standing idle.
- Frequently used for store-to-customer's car deliveries.
- Easily fits into a delivery truck, car trunk, or station wagon for those material moving problems away from the store or warehouse.
- The 5 frame cross members are located to keep 1-gallon cans from falling through.
- Noseplate is 7" wide at the front, is 8" deep, and is 10½" wide at the rear.
- Loop type Handle bent back for hand room between the load and the frame.
- Versatile — can be used for other general type loads.

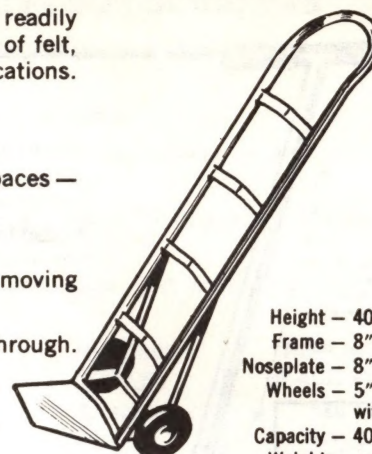

Height — 40"  
Frame — 8" wide  
Noseplate — 8" deep x 3/16" thick  
Wheels — 5" x 1.50" solid rubber,  
with oilite bearings  
Capacity — 400 lbs.  
Weight — only 17 lbs.

No. TT-RW — Replacement Wheel

## SOLVE YOUR LARGER MATERIAL HANDLING PROBLEMS *with this* WIDE SELECTION OF RUGGED GUNDLACH HAND TRUCKS



SINGLE  
HANDLE  
STYLE

- Sturdy all steel welded construction for years of strenuous service. Reinforced frame resists bending from overloading.
- Vertical center strap keeps smaller items from falling through the frame. An extra frame cross member is welded to the noseplate to add rigidity—a feature not found on many other brands!
- The full sized frame on both models measures 14" wide x 48" high.
- Two sizes of nose plates are available. One is 7" deep, and this is the industry standard for general purpose work. The other is 9" deep—for wider and bulkier loads. Both are 14" wide, and the front corners are angled to prevent accidental snagging or gouging of other materials by a less than careful user.
- Two types of wheels are available to suit your needs. Both have heavy gauge steel hubs and ball bearings. One wheel has a Semi-Pneumatic tire, which is ideal for indoor use. A truck with this wheel has a 400 lb. load rating.

The other wheel has a Fully Pneumatic Air Tire. This gives better performance over bumpy surfaces, and for negotiating curbs and stairs. Also, it has a greater load capacity—600 lbs. per truck. Both wheels are a large 10" in diameter for free wheeling and stable operation.



DOUBLE  
HANDLE  
STYLE

### HAND TRUCK STOCK NUMBERS and DESCRIPTION:

No. SH-7-SP	— Single Handle,	7" deep Nose Plate,	and Semi-Pneumatic Wheels
No. SH-9-SP	— Single Handle,	9" deep Nose Plate,	and Semi-Pneumatic Wheels
No. DH-7-SP	— Double Handle,	7" deep Nose Plate,	and Semi-Pneumatic Wheels
No. DH-9-SP	— Double Handle,	9" deep Nose Plate,	and Semi-Pneumatic Wheels
No. SH-7-FPT	— Single Handle,	7" deep Nose Plate,	and Fully Pneumatic Wheels
No. SH-9-FPT	— Single Handle,	9" deep Nose Plate,	and Fully Pneumatic Wheels
No. DH-7-FPT	— Double Handle,	7" deep Nose Plate,	and Fully Pneumatic Wheels
No. DH-9-FPT	— Double Handle,	9" deep Nose Plate,	and Fully Pneumatic Wheels

### REPLACEMENT WHEELS:


No. 10-SP-RW—Semi Pneumatic  
10" Diameter x 2.75" Wide.

No. 10-FPT-RW—Fully Pneumatic  
10" Diameter x 3.50" Wide.

## No. 7-APT APPLIANCE TRUCK

### For Safe Moving of Heavy or Bulky Items

Has a lightweight sturdy I-Beam aluminum alloy frame. One man can operate. Supplied with a 15 ft. strap that is securely controlled by a fast ratchet mechanism. Front of the frame is covered with heavy felt padding. Has Crawler Glide Belts for stairs, and non marking 5" diam. rubber wheels with roller bearings for free wheeling. Frame cross members are curved. Frame is 15" wide x 60" high. Noseplate is 24" wide x 5" deep. Weighs 36 lbs., and has a capacity of 800 lbs.

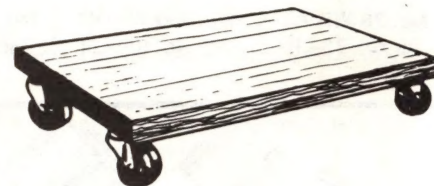

## No. TLD TILE LAYERS DOLLY

For faster and easier tile laying work. Deck made from durable solid oak, 14" wide x 21" long x 4" high. Has 4 ball bearing swivel casters, with 2" diameter wheels. Can also hold miscellaneous equipment and adhesive buckets.





#

**No. SK-SK SKAT SKATERS...Best There Is For Your Moving Problems**

Used in sets, they ride up and over door sills, and float over rough and uneven floors. One man can mount and move all kinds of heavy loads. They are virtually a necessity for those who work by themselves!


Economically priced, they are sold 2 per set. Each Skat Skater dolly measures 23" in length when closed, but can be extended to a full 30". Each is 8½" wide, and each has 8 top quality ball bearing swivel casters with 2" non marking soft rubber wheels. Covered with soft padding to prevent scratching of delicate objects. Weight is only 15 lbs. per set. Load capacity is 1,000 lbs. per set.

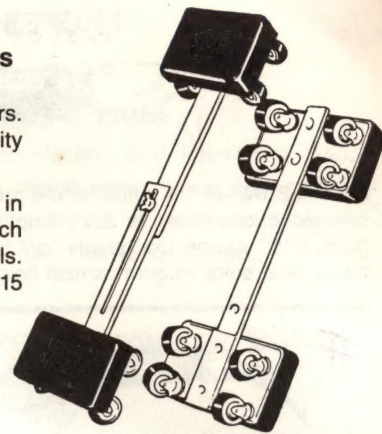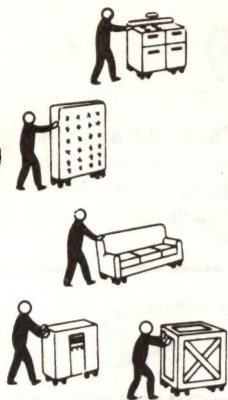**No. 933 EASY SKIDS****Another Easy Way to Move Heavy Appliances and Furniture!**

Patent Pending

With these economical skids, you can move heavy objects from one room to another with great ease. Simply slightly tilt or lift one end of the item to be moved and position a skid—repeat for the other end—and push the item to where you want to go! These skids have a non-slip foam rubber top, and an extra smooth flexible plastic bottom, to glide effortlessly across the floor with a heavy load.

Works equally well on all types of carpet, wood, or resilient floors. Takes no room in your van, as they can lay flat on the floor. The super bond is guaranteed to hold the foam rubber to the plastic. Helpful "How to Use" hints supplied. Each skid is 48" long x 6⅞" wide. Sold only in sets of 2.

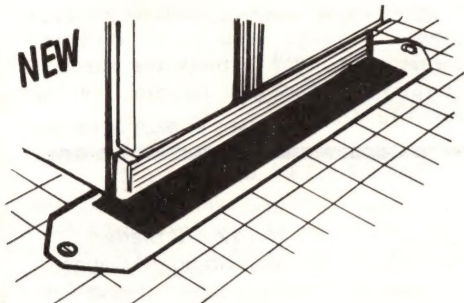**No. 2822 UNI-LIFT HEAVY MOVERS WITH STA-TITE**

Easily moves refrigerators, washers, dryers, filing cabinets, and other such heavy items up to 800 lbs. Only one person needed, which saves unnecessary extra labor cost. Also, eliminates the danger of muscle strain or back injury. They function in tight places. Needs only 4" of wall clearance to place into the lift position.

To operate, simply insert the lip of each unit under both sides of the object to be moved. Little, or no tilting, is necessary! Raise by pushing the handle of leveraged cam lifting mechanism. Roll freely away to destination on four 3" ball bearing swivel casters.


Units are 22" wide x 28" high, and have all-steel welded construction. One unit is equipped with a 2" x 1' strap with a buckle, while the other unit is equipped with a 2" x 11' plain strap. An additional 2" x 7' plain strap and the No. 601-ST Sta-Tite Load Binder are also supplied. Sold 2 per set. Each unit weighs only 21 lbs.

**No. 601-ST STA-TITE LOAD BINDER**

This belt tightening device is supplied with the No. 2822 Uni-Lift. Fast acting, it provides secure tightening. Also sold separately.

**LINOLEUM DOLLIES**

These popular Dollies help roll goods handling problems! They are sturdily constructed to give many years of maintenance free service. They feature protective tread non-marking rubber wheels, and the end frame members are made from sturdy aluminum alloy castings. Both ends have a hand hole for comfortable carrying. The free wheeling rollers are supported on both ends by ball bearings, and the rollers are made from heavy gauge steel tubing to resist denting. Both models will accommodate rolls up to 16" in diameter.

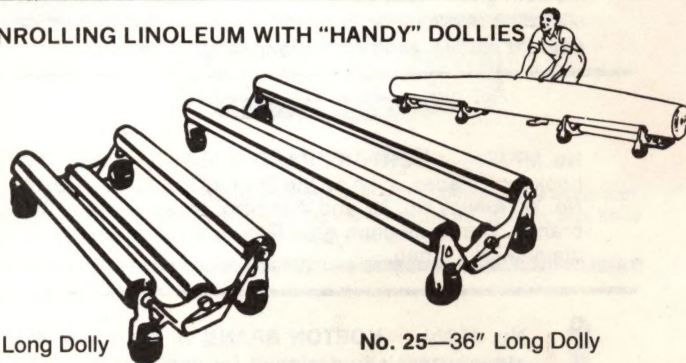
**UNROLLING LINOLEUM WITH "HANDY" DOLLIES**

No. 15—18" Long Dolly

No. 25—36" Long Dolly


**No. 4 LINOLEUM TRUCK**

Here is a truck designed for convenient ONE-MAN use! It handles roll goods 6 ft. long and up to 16" in diameter with maximum ease. It stands 5½ ft. high in the upright position, and 2 ft. high when horizontal. It is equipped with 4 roller bearing protective tread rubber wheels that are 5" in diameter x 1¾" wide. The 3 ball bearing suspended cradle rollers permit unrolling of goods to be cut. Every store that handles roll goods should have the advantages that this truck offers.

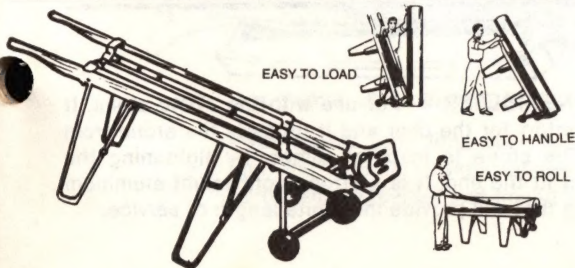



## PROFESSIONAL MODEL LINOLEUM and CARPET KNIVES



**No. 2A-2-1/2**—A fine knife for the professional mechanic at a reasonable price. Blade is 2½" long, and is ground and polished from .065" gauge top quality tool steel. The extra large handle has a clear color smooth varnish finish.



**No. 20410** — A long time favorite Hyde brand knife, with a general purpose 2½" long point blade. The hardwood handle has a burnt finish. The blade is securely pinned, and made from the finest grade chrome vanadium cutlery steel for long-lasting edge retention.



**No. 102 COMBINATION LINOLEUM KNIFE**  
A dual style knife having both a hook and a hawkbill type of blade. The cherry wood handle is specially shaped for a more positive grip. The Blade is made from a top grade alloy steel for long wear.

MADE IN WEST GERMANY



**No. 20460 CARPET TUCKING KNIFE**—Most carpet knives are not strong enough for this use—but here's one that is! Has a heavy gauge 2½" blade that is plenty stiff, and is properly heat treated to prevent breakage. Can also be used for general cutting work.



**No. 103-CK CARPET KNIFE**—Has an exceptionally high quality 3" long blade. It keeps its extra sharp edge longer than others! Can be used on all types of carpeting. It also features the specially shaped positive grip handle like the No. 102 Knife.

MADE IN WEST GERMANY

### No. 5 WARD KNIFE and BLADES

A favorite with many mechanics, this knife features an assortment of 3 replaceable blades for its full sized hardwood handle. These blades are easily changed, and they can be adjusted for shallow or deeper cutting, and up or down for different cutting angles. Knife is supplied with one No. 12-WB Blade. Blades are packed 12 each per package.



**No. 12-WB Blade**  
Straight Standard Gauge



**No. 13-WB Blade**  
Straight Heavy Gauge



**No. 14-WB Blade**  
Double Hook Style



**No. 6 AIRWAY KNIFE**—This long time popular knife has a full contoured shape for comfortable and firm gripping. The square blade holding peg eliminates blade wobble. All blades are interchangeable in the die cast polished aluminum handle. Loosen only one screw to quickly change blades. Screw is case hardened to resist slot wear. Blades are packed 12 each per package. One No. 25-AB Straight Blade is supplied with the Knife.

### SHARPENING STONES for LINOLEUM KNIVES and UTILITY KNIFE BLADES



#### No. JT8 SHARPENING STONE

Medium grit — fast cutting — with handle. One side is slightly convex, and the other is flat — for curved or straight blades. Stone is 6" long, and 10" overall.



**No. JP14 NORTON BRAND** —A handy pocket stone with a fine #280-320 grit for razor sharp edging. Used for straight utility knife blades, and also for Knife Edge carpet shears. Has a protective leatherette carrying case, and is ¾" thick x 7/8" wide x 3" long.

**No. MFJ214 NORTON BRAND** — Ideal for sharpening hook type blades, such as the Stanley No. 11-961, Dexter No. 72, Airway No. 26, and Ward No. 14, as well as other brands. Has a medium grit. This is a round stone ¼" diameter x 4" long.




**No. JT910 NORTON BRAND** — A medium #120 grit linoleum knife stone without a handle, that is preferred by some mechanics. Size is ¾" thick x 1¼" wide x 10" long.



**No. JT920 NORTON BRAND** — A medium #120 grit stone, especially designed for linoleum knife sharpening. Has a permanently attached comfortable wood handle. Stone size is ¾" thick x 1¼" wide x 10" long, and overall length is 14½".

**No. JT930 NORTON BRAND** — This is a double grit stone having the fast cutting #120 medium grit on one side, and the #240 fine grit on the other side for razor edge sharpening. It has the same dimensions as the No. JT920 shown above.




**No. 65 STONE HOLDER** — For use with the JT910 stone. It provides comfort for the user and it protects the stone from breakage. The stone is installed simply by tightening the thumb screw at the end. It is a strong lightweight aluminum alloy casting that will provide indefinite length of service.



# FAMOUS DEXTER LINOLEUM and CARPET KNIVES

No. X752-1/2-D BLADE

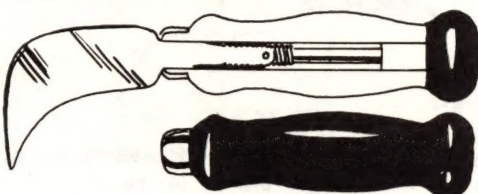

No. 10-D HANDLE

No. VX752-1/2-D BLADE




No. X2A-D BLADE

## REPLACEABLE BLADE LINOLEUM KNIFE

Three knives in one . . . with all the balance, design, and keen long lasting sharpness of the regular Dexter knife, plus the added convenience and economy of replaceable blades. The shaped burnt finish handle has a metal tube with inside threads that grip and draw up tight on the threaded shanks of the replaceable blades. To change, just twist the knob.

### ORDER HANDLE and BLADES SEPARATELY for COMPLETE KNIFE

- No. VX752-1/2-D — Deep Hook 2 1/2" Vinyl Grind Blade
- No. X752-1/2-D — Deep Hook 2 1/2" Linoleum Blade
- No. X2A-D — Shallow Hook 2 1/2" Felt Back Blade
- No. 10-D — Handle for above Blades

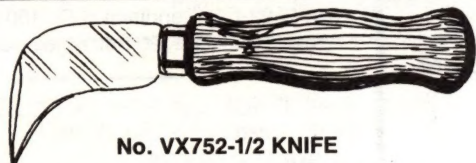

No. VX752-1/2 KNIFE

New Vinyl Grind Knife with 2 1/2" deep hook blade. Double-Taper precision ground back edge allows smooth and easy cutting of vinyl with less roll over, leaving an almost invisible seam. Has round shaped burnt finish wood handle.



No. X752-1/2 KNIFE

Has a 2 1/2" deep hook blade with the regular grind that has long been a popular favorite for linoleum. The round shaped burnt finish wood handle is securely riveted to the blade, as is the case with all Dexter fixed blade knives.



No. X2A KNIFE

Has a 2 1/2" shallow hook blade with the regular grind. This knife is particularly suitable for felt back and wall types of linoleum. Has round shaped burnt finish wood handle.



No. X1H-F CARPET KNIFE

A Roberts designed thin bladed knife that is extra flexible for easier cutting over net. Simple to control. Blade is 2 3/4" long. Round wood handle has burnt finish.



No. X2H CARPET KNIFE

Similar to No. X1H-F, but has a longer 3 1/8" blade that is also a heavier stiffer gauge. Some mechanics prefer these features. Round wood handle has a burnt finish.




No. X252-1/2 KNIFE

Another Dexter knife well suited for felt back and wall types of linoleum. It has a 2 1/2" long blade that is narrower as well as having the shallow hook. Has round shaped burnt finish wood handle.




No. X751 KNIFE

A Dexter linoleum knife with a heavy gauge short hook blade 2" long. Has a round wood handle with a burnt finish.



No. X3D PAD KNIFE


A Roberts designed reverse curve blade 2 3/4" long with a razor sharp edge for clean cutting of carpet padding without ragged edges or tearing. Has round wood handle.

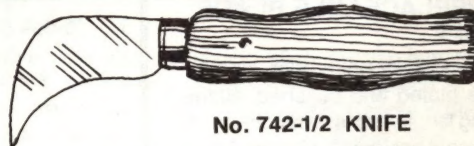

No. 742-1/2 KNIFE


An all-purpose D. Harrington & Son knife with a 2 1/2" blade with a deep hook and a contoured shaped wood handle. As do all Dexter knives, this knife features a hand ground and hand honed blade.

## HYDE CARPET KNIVES



No. 54020—2 1/2" BLADE SIZE

Hyde Knives have long been famous for quality. These models are made to cut all types of carpeting. The flexible hawkbill blades are made of the finest high carbon steel. They are individually hardened, tempered, and honed for long lasting cutting edges. Both numbers are packed 10 per box.

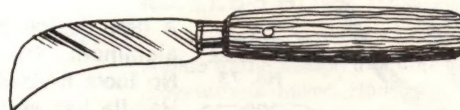

No. 54040—3 1/8" BLADE SIZE



# UTILITY KNIVES and BLADES



**No. 1199 GUNDLACH**—A heavy duty knife with just the right shape for positive firm gripping. Zinc die cast in 2 sections—provides blade storage. Has a baked silver enamel finish. Overall length is 6".

**STANLEY**




**No. 10-299 STANLEY**—The Two-Way knife that can also be used as a scraper. Exclusive design permits blade to be held in the usual manner for cutting, and in a second position for scraping. Aluminum die cast in 2 sections—provides blade storage, and is 5½" long.

**STANLEY**



**No. 10-599 STANLEY**—A rugged zinc die cast handle made in 2 sections. The 4¾" shorter length is preferred by some users. Blades can be stored inside the handle.



**No. 1499 GUNDLACH**—Made of cast iron, this hefty full sized knife wears longer! Has a "full grip" heavy feel preferred by many installers. Uses regular and heavy duty blades and either can be stored in the handle, is 5¼" long, and weighs 10 oz.

**STANLEY**



## No. 10-049 REPLACEABLE BLADE POCKET KNIFE


Can be used like a Utility Knife. Slim die cast case is chrome plated and polished. Blade has a 1¾" cutting length and is easily changed. Safety lock prevents accidental closing. Overall length is 4¼" with blade closed.

**No. 11-040**—Replacement Blade

**STANLEY**



**No. 10-099 STANLEY**—A popular retractable blade knife that combines safety with convenience. Blade can be moved to 3 positions—full, half, and quarter—as well as completely retracted. Aluminum die cast in 2 sections for easy blade changing and storage. Ideal for opening cartons. Uses Heavy Duty Blades, 3 included.

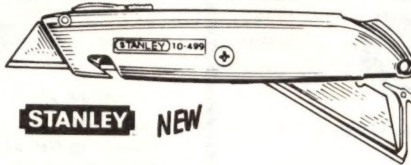

**STANLEY NEW**

**No. 10-499 STANLEY**—Features front blade loading without disassembly. Locks positively in 4 positions. Automatic blade storage magazine opens downward with a push of a button. Blade fully retractable for safe carrying. Has thumb rest for greater control. Uses Heavy Duty Blades, 3 included.


**STANLEY**

**NEW**



**No. 10-399 STANLEY SWIVEL-LOCK™**—Features a push-button opening and closing feature for speed and convenience. No tools needed to change blade. The interlocking nose grips blade solidly and securely. Has a rugged die cast aluminum body, with a blade storage compartment. Uses Heavy Duty Blades, 3 included.

**STANLEY**



**No. 10-009 STANLEY**—The Quick Point knife features a Break-Away blade having 10 sharp points. Simply push button forward to snap off blade—not necessary to disassemble. The lightweight aluminum handle has a magazine for blade storage. Supplied with a No. 11-910 Break-Away Blade and 2 each No. 11-902 Heavy Duty Straight Blades.

**STANLEY**




## STANLEY STYLE STRAIGHT BLADES

Two famous brands in the Regular and Heavy Duty styles. Regular is 2" long x .017" thick, and the more rigid Heavy Duty is 2⅞" long x .025" thick.

**No. 11-911**—Stanley Reg., 5 per Pkg.  
**No. 11-911A**—Stanley Reg., 100 per Box\*  
**No. 11-921**—Stanley H.D., 5 per Pkg.  
**No. 11-921A**—Stanley H.D., 100 per Box\*  
**No. G-91-C**—Gundlach Reg., 100 per Box\*\*  
**No. G-92-C**—Gundlach H.D., 100 per Box\*\*  
 \*5 per Package, 20 Packages per Box

**No. 11-980 LINOLEUM BLADE**



Deep hook style desirable for cutting sheet flooring materials. Fits No. 1199, 10-299, and 10-599 knives. Packed one blade per package.

## HOOK BLADES




Razor sharp! Cuts only to depth of hooked inside cutting edge. Fits all Stanley knives except the No. 10-009.

**No. 11-961**—Stanley, 5 per Pkg.  
**No. 11-961A**—Stanley, 100 per Box\*




\*PACKED 100 BLADES IN A PLASTIC SPRING LOADED DISPENSER BOX.

## STANLEY REPLACEMENT BLADES (FOR No. 10-009 KNIFE ONLY)



**No. 11-910**—Break-Away Blade, 3 per Card





**No. 11-902**—Heavy Duty Blade, 5 per Card

## No. 7-DK DEXTER KNIFE and BLADES

A new design by Dexter featuring a comfortable linoleum knife shaped handle in die cast aluminum. The offset head gives knuckle room, and provides a convenient work angle. No tools needed to change blades — merely unscrew the end cap and swing the knife open. Handle has storage room for 5 blades. Knife supplied complete with 5 No. 73 Heavy Duty Straight Blades.







**No. 73-5** — Heavy Duty Straight Blade..... 5 blades per package  
**No. 73-C** — Heavy Duty Straight Blade..... 100 blades per box  
**No. 72-5** — "V" Shaped Hook Blade..... 5 blades per package  
**No. 71-2** — Long Point Linoleum Blade..... 2 blades per package





## No. 800 SUPER SAW KIT

219.50

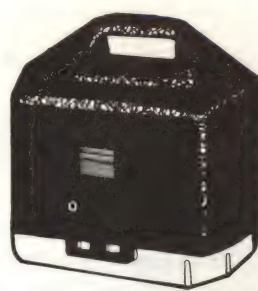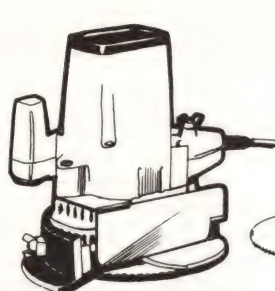

This is the famous Jamb Saw redesigned with a new motor, a durable plastic carrying case, and larger 6½" diameter blades. Used for undercutting to eliminate time consuming fitting, and for cutting off doors. Can be adjusted to 1¼" height, and can cut doors 1¾" thick without removal. Supplied with a No. 803 100-tooth steel blade and a No. 805 Masonry blade. The No. 804 40-tooth carbide tipped blade is optionally available. See below for more information on Blades for the Super Saw.

### BLADES FOR No. 800 SUPER SAW AND No. 550 JAMB SAW

Blades are available in combination steel, carbide tipped steel, and masonry cutting types. Combination steel blades have more teeth for smooth cuts, while carbide tipped blades have longer life. Blades are **not** recommended for cutting metal as this can cause a fire hazard, as well as damage the blades. Blades for the No. 800 Saw are **not** interchangeable with blades for the No. 550 Saw, and vice versa.


### For No. 800 Super Saw ONLY

Stock No.	Blade Type	No. of Teeth	Diameter
803	Combination Steel	100	6½"
804	Carbide Tipped Steel	40	6½"
805	Masonry	—	6½"

### For No. 550\* Jamb Saw ONLY

Stock No.	Blade Type	No. of Teeth	Diameter
551	Steel	80	5½"
552	Carbide Tipped Steel	42	5½"

\*Discontinued Model, but Nos. 551 and 552 Blades are still available.

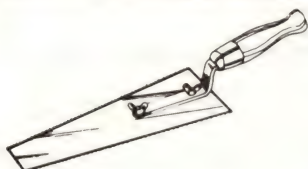


### No. 336 UNDERCUTTING SAW

A new improved model, with a replaceable blade. Undercuts door jambs, and other wall base obstacles. Eliminates intricate fitting work. Specially shaped 12" long blade permits right or left hand cutting. The comfortable wood handle is sufficiently offset to provide knuckle protection. Blade is made from high carbon saw steel, and has 10 points per inch.

No. 336-RB—Replacement Blade only for No. 336 Undercutting Saw

### No. UK3 "QUICK CHANGE" ALL-STEEL UTILITY KNIFE



A new design that lasts longer. Blade back pressure can't cut the steel housing. The narrow front nose provides greater cutting line visibility. Hinged in the rear for fast blade changing—no screws to loosen. Has a leatherlike no-slip finish. Can store 5 blades in handle. Economically priced. Supplied with 3 No. A&G Heavy Duty Straight Blades shown below.

### No. RK4 RETRACTABLE BLADE UTILITY KNIFE



Features a plastic slide mechanism that never needs lubricating. Has 4 self loading positions: closed, ⅓ open, ⅔ open, and a full 1" open. Handle is die cast aluminum, and has a slip resistant wrinkled finish. Supplied with 3 No. A&G Heavy Duty Straight Blades shown below.

## UNIVERSAL UTILITY KNIFE BLADES

### No. A&G-5 HEAVY DUTY STRAIGHT BLADE



Fits all popular brands of Utility Knives, is .025" thick x 2⅝" long. This Blade is necessary for use on the Nos. UK3 and the RK4 Utility Knives shown above. Packed 5 per Package, 10 Packages per box.




CONCRETE

### No. LKB-5 HOOK BLADE

A wide throat design that cuts on concrete without drilling. Hand ground and polished for easier cutting. Fits all utility knives in this Catalog. Packed 5 per Card, 10 Cards per box.



## COVE BASE ADHESIVE APPLICATOR GUNS

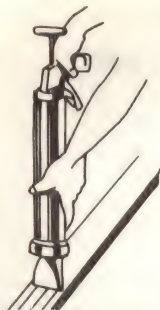


Numerous installers are converting to this more efficient method of applying cove base adhesive. It is faster, cleaner, and easy to use. A slight squeeze of the trigger produces an even flow of adhesive beads on back of the cove base. Two types of guns are available (described below), and both have 1 qt. capacity. Guns are sold separately from the Nozzles, and should be ordered accordingly.

**No. 974 CARTRIDGE COVE BASE GUN**—This Gun utilizes pre-filled adhesive cartridges. Several adhesive manufacturers produce these cartridges, and they are

available through many floorcovering distributors. Partially used cartridges can be left in the Gun by simply applying tape over the nozzle to prevent hardening of the remaining contents.

**No. 973-BP BULK PACK COVE BASE GUN**—This is the bulk fill type of Gun. Adhesive cost can be reduced by using lower cost material supplied in 5 gallon cans. Also, it is ideal for those users who do not have ready access to cartridges, or where preferred brands of adhesive are not available in cartridges. For use with the No. FP-5 Vacuum Filler Plate.

### No. 2546 COVE BASE CORNER CUTTER

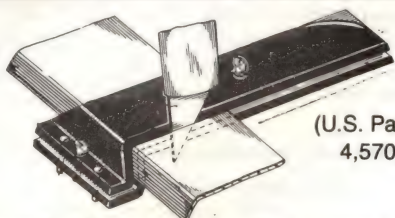

(U.S. Patent No.  
4,570,350)

This professional tool lets you cut perfect corners every time! For outside and inside corners, on both rubber and vinyl base. Made from heat treated tool steel, it is a precision cutting guide. The Base is clamped firmly into the tool, and then all you need is a utility knife with a sharp blade. Eliminates the cost of preformed corners! Lets you finish the job if you run out of corners. Makes a better looking job too, with no costly call-backs for kicked off corners.

Handles 2½", 4", and 6" Base sizes. Fits in a tool box as is — only 3½" wide x 10½" long. Easy to use with only a little practice — instructions supplied. This tool was invented by a veteran floor covering contractor to let you save money and do better work!



### NOZZLES FOR COVE BASE ADHESIVE APPLICATOR GUNS

Three sizes fit both Guns, and are sold and ordered separately from the Guns.


**No. 975**—2-Hole Nozzle only, for 2½" Cove Base  
**No. 976**—3-Hole Nozzle only, for 4" Cove Base  
**No. 977**—5-Hole Nozzle only, for 6" Cove Base

### No. FP-5 VACUUM FILLER PLATE —

for use with the No. 973-BP Bulk Pack Cove Base Gun

Speeds bulk gun loading, and eliminates messiness. Self adjusting, fits 5-gal. pails having non-tapered side walls.

Made from an aluminum casting and a neoprene skirt ring. No priming is necessary, and the Plate remains in the container until it is empty. Remove the nozzle from the Gun, and then thread the gun barrel into the Filler Plate. Fill the Gun by drawing the gun rod out quickly.

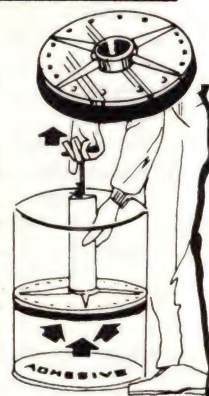

### No. 532 COVE BASE GROOVER


Removes material from the back of vinyl or rubber cove base for better "wrap around" outside corners. Eliminates costly preformed corners, and improves appearance. Has 5/32" U shaped blade which is adjustable for depth of cut. Blade can be sharpened, and replacements are available. Headless Steel Brads (shown on Page 24) can be used to keep the base snug to the wall until the adhesive sets.

**No. 532-RB**— Replacement Blade



### No. CB1 COVE BASE TOE TRIMMER

Don't bother to stock Toe-less base when you can make your own as needed, and when it is needed. Only 2" wide x 2½" long x 7/8" thick. Requires no skill. Fast and accurate. Uses a slotted razor blade, which is supplied. Weighs 6 oz.



### GROOVE JOINT PLIERS

Perfect for that occasional pipe work Tilessetters must do. Also an excellent general purpose tool that does the work of a Pipe Wrench, Monkey Wrench, Adjustable End Wrench, Pliers, etc. Serrated Teeth give maximum gripping power, and Jaws lock securely in any selected position. Lightweight — can be used with only one hand. Has plastic coated Handles, and is rust resistant chrome-nickel plated. A valuable addition to any tool box!



**No. HL116P**— 11 Settings  
from 0 to 4-1/4"

**No. HL112P**— 6 Settings  
from 0 to 2-1/8"

**No. HL110P**— 5 Settings  
from 0 to 1-1/2"



### No. H16P SLIP-JOINT PLIERS

A regular pliers, plus wire cutting slots, makes this a very desirable tool. Nickel chrome plated with plastic covered handles. Popular 6" size, with a 1" jaw capacity.

### ADJUSTABLE WRENCHES

Used frequently by every kind of mechanic, these are top quality, with strength and hardness that exceeds Federal Specifications. Nickel chrome plated, and handle is covered by a comfortable cushion of green transparent vinyl, that is non-slip, grease resistant, non-sparking, and will not chip or crack.

Stock No.	Size	Capacity	Thickness of Head	Weight
D76P	6"	3/4"	13/32"	4 oz.
D78P	8"	15/16"	15/32"	8 oz.
D710P	10"	1-1/8"	9/16"	14 oz.
D712P	12"	1-5/16"	3/4"	23 oz.

### No. 84-354 SELF-ADJUSTING LOCKING PLIERS

This outstanding tool sizes itself automatically and locks instantly — with only one hand operation! No separate adjusting, as with old-fashioned models. Just squeeze, and the curved serrated jaws lock for a no-slip bite. Clamping force adjustable from zero to a maximum of 2,000 lbs. of pressure. Has a smooth release. Maximum jaw opening is 1½". Is 8½" long, weighs 1½" lbs., and is economically priced.






## AIRWAY POLYPHASE SCRIBERS—*The Precision Way to Perfect Work*



**No. 11-A**

Complete with 8" Bar, and extra needle hole in the housing for circle scribing.

These tools feature the original famous Airway quality design and construction — a heavy die cast housing, with a sturdy precision fitting plated steel bar.



**No. 111-A**


Complete with 6" Bar

### HOW TO USE YOUR AIRWAY SCRIBER



#### FOR SEAM CUTTING

If using selvage edge take off roughness with rasp or sandpaper block. Set needle to coincide with inside of guide so that needle will coincide with underlapping edge. Score lightly. (Do not crowd tool or force needle too deep as this will cause imperfect fit.) Especially valuable in scoring for cutting seams in linoleum with felt backing. Cut with slight bevel.

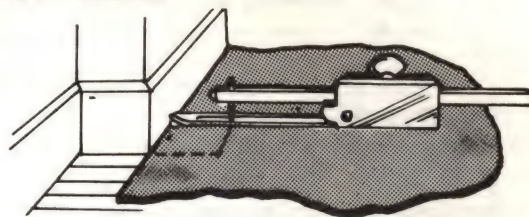

#### FOR IRREGULAR SCRIBING




#### FOR INLAYING FEATURE STRIPS IN SOLID FIELD

Place one needle in housing, adjust bar needle to project through slot in guide. Space needles to desired width of feature strip. Score and cut with slight under bevel which makes a perfect fit.



#### FOR WIDE SCRIBING


Reverse bar for scribing where tight fit is required such as bath tubs, marble or wood bases.

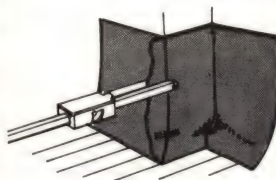

#### OUTSIDE CORNERS ON COVE BASE

To score first piece, adjust needle back from end of guide to thickness of linoleum. Score from top of cover strip to top of linoleum then cut with knife following score at a 45 deg. bevel. To score second piece set needle with end of guide. Score and cut again at a 45 deg. Rub chalk in score line to make more visible.

**NEW**

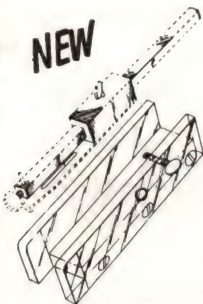

#### No. 1111 SCRIBER SETTING GAUGE (U.S. Patent No. 4,590,677)

Makes **ACCURATE** setting of No. 11-A and No. 111-A Bar Scrivers much easier! To use, simply clamp the scriber into the gauge, with the guide bar tip resting against the offset base. Then adjust the needle point for an over, net, or underscribe as much as desired, and tighten the scriber thumb screw. Made from 1/4" thick clear acrylic plastic, and weighs only 3 oz.

#### REPLACEMENT SCRIBER NEEDLES

**No. 21N**—3/4" Long x .068" Scribing Needles, 50 per Pkg.

**No. 22N**—7/8" Long x .068" Scribing Needles, 50 per Pkg.

#### SCRIBER BARS

**No. 4-SB**—4" Scribing Bar

**No. 6-SB**—6" Scribing Bar

**No. 8-SB**—8" Scribing Bar


**No. 18-SB**—18" Scribing Bar



#### No. 460-SB VINYL SEALER BOTTLE

Features a multi purpose nozzle for seam sealing sheet and cushioned vinyl flooring. Suitable for all brands of adhesive. Each bottle contains complete detailed directions on how to use.

#### No. 240 BAR SCRIBER



For extra wide scribing that can't be done with Dividers. Has 2 needle holders, and has telescopic action that permits making scribe marks from 1" to 23" wide. The rotatable round tip easily follows wall contours. Made from brass and steel, and weighs only 4 oz. Uses No. 21N Repl. Needles.

### MOULDING LIFTERS

**No. 57-ML**— This extremely popular tool gives positive leverage control to avoid denting the baseboard. It is also specially designed to lift the moulding at approximately the same angle that the nails were driven.

The smoothly ground slim ends enter easily under the mouldings, and both are notched for nail and brad pulling.

The top grade tool steel is hardened and tempered for maximum toughness. Finished with a rust proof bright nickel plating. Weighs only 1/2 lb., and is 10 1/2" long.



**No. 55-515** — An all purpose tool capable of performing numerous and countless jobs.

The 1 1/4" wide slim tapered claws are smoothly ground and beveled, thereby reducing the danger of denting or marring work surfaces. Both ends have beveled slots for nail pulling, and one end has a roofing nail remover slot. Extra leverage is provided by the 12" overall length.

A drop forged tool made from tempered spring steel, it is specially heat treated for extra heavy duty use. Weighs a hefty 1 1/2 lbs.





## EXTENSION DIVIDERS


### A WIDE SELECTION TO SUIT YOUR REQUIREMENTS



This brand is economically priced, but is of good quality. All parts are made from rust resistant steel. Both models have the spring tensioned fine adjustment feature.


**No. 206C**—The forged steel legs have hardened points. One leg is straight, and one is bent. These legs are interchangeable, or they can be removed for a pencil or a No. 16-X Pin Vise substitution. Has knurled locking nuts in all places.

**No. 205C**—Same as the No. 206C, except that both legs are straight.



No.  
206C

No.  
205C

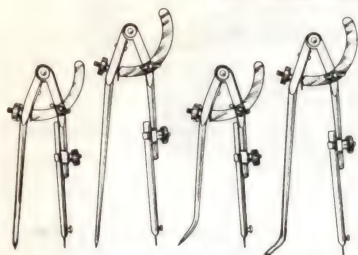

No.  
106-SL

No.  
108-SL

No.  
106-BL

No.  
108-BL


This line is specifically modified to meet the needs of the floorcovering mechanic. Sturdily constructed from cast steel, the design is highly similar to the formerly available Wilkee Dividers. The one removable leg is the No. 16-X Pin Vise (shown below). These tools are available in both the bent and the straight leg styles. Can be adjusted for an immovable positive lock. A pencil can be substituted for the Pin Vise Leg. The Pin Vise uses either the No. 21N or the No. 22N Needles.

**No. 106**—Overall length is 6", and the maximum circle scribing diameter is 17"

**No. 108**—Overall length is 8", and the maximum circle scribing diameter is 22"

### No. 355 BENT LEG DIVIDERS

A 7" model with a sturdy die cast head that very comfortably fits the palm of the hand. Specially designed for the resilient floorcovering installer. It features an extra powerful locking system that preserves setting accuracy. Also, the head has numbered calibrations that make setting selections easier. Maximum setting is 7 1/4" and the minimum is 1/2". The entire tool is rust proof. The Pin Vise Leg uses either No. 21N or No. 22N Scriber Needles.



No. 400-4

No. 400-6



4" Legs



6" Legs

These are Toolmakers' style Spring Dividers, with round legs in two sizes. They differ from other brands because they have an exclusive replaceable Needle Point feature. They have stiff tempered springs in conjunction with tapered fulcrum spools to compensate for wear and eliminate all possible wobble. The split adjusting nut permits rapid adjustment.

**No. 84-P**—Replacement Needle Points, 12 per Pkg.



No. 16-X  
No. 16-X-WH

### PIN VISES

**No. 16-X**—Excellent for free hand scoring, or as a replaceable leg in the No. 106, No. 108, No. 205C, and No. 206C Dividers (shown above). Is 5/16" diameter x 5" long. Zinc plated, and uses either the No. 21N or the No. 22N Needles.


**No. 16-X-WH** with Handle—More comfortable—especially when deeper scoring is necessary. Also provides greater control for higher accuracy. Securely riveted, and handle won't come loose from hard use. Overall length is 6 1/4".

### No. 21 ELECTRIC PENCIL ENGRAVER




Prevent theft by marking your tools and other personal items with this low cost tool. Use it like a ball point pen on metals, hard plastics, glass, etc. Has a super hard tungsten carbide tip. Speed can be adjusted for wide or fine line work. Is 7" long, and weighs 9 ozs.

### CARPENTER SQUARES—Widely Used as a Linoleum Straight Edge and Squaring Tool

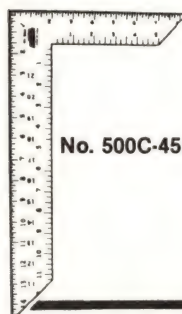

No. 500C-45

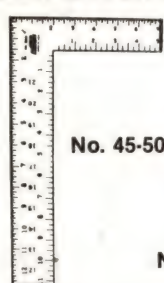

No. 45-500




No. 45-912

**No. 500C-45**—Has accurate 45° ends for mitreing work. One leg is 24" x 2" and the other is 16" x 1 1/2". Both legs are graduated on the face and back in 1/8 inches. Has a natural steel lacquered finish, and the numbers and graduations are permanently impressed. When used as a straight edge, it has the advantages of preventing slippage by kneeling on one leg while cutting.

**No. 45-500**—Same as No. 500C-45, but with square ends.

**No. 45-912**—A small and useful square for floor covering pattern work. One leg is 12" x 1 1/2" and the other is 8" x 1". Has 1/8 inch graduations on both sides, the ends are square, and has a natural steel buffed finish.

NEW

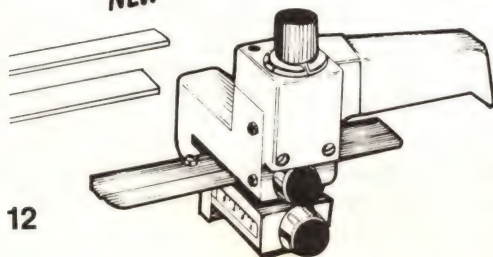


### No. T-78 VIRUTEX SLITTER—FOR CUTTING SHEET VINYL FEATURE STRIPS

Originally designed for cutting plastic laminate, this tool has an excellent second use as a feature strip cutter for vinyl sheet goods. Has an .080" capacity and can cut strips from 1/2" to 3 1/4" wide. Cutting is done by scoring the material between two opposing circular blades mounted on roller bearings. Blades are adjustable for different sheet thicknesses by a knob on the top of the tool. For the desired strip width, the gauge is simply adjusted and locked for making identical strips. Weighs less than 3 lbs. See Page 35 for the No. AH-97 Slitter, a model capable of cutting up to 8" widths.

**No. 15.27.75**—Replacement Blades, 2 per Set



## RIGID STEEL T-SQUARES and STRAIGHT EDGES

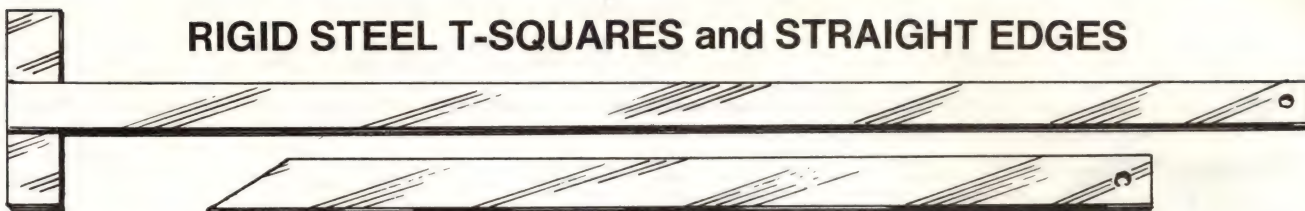

Specially made for sheet goods flooring work, famous Gundlach craftsmanship is applied to make these much straighter and more parallel than any others on the market. **Prove this to yourself by putting two of them together!** They are  $\frac{1}{8}$ " thick x  $2\frac{1}{2}$ " wide, and just heavy enough to hug the floor nicely. The hard steel resists knife blade wear, and it is heat treated to prevent the loss of accuracy from dropping or other abuse. Finished in a pleasing eye strain saving green. Nail holes are provided on one end, and the opposite end of the Straight Edges is cut on an accurate  $45^\circ$  angle for mitre work. T-Square heads are  $14\frac{1}{2}$ " long and are plug welded for strength. For quality work, use these quality tools!

No. 19-RS—19" Long Rigid Straight Edge  
No. 39-RS—39" Long Rigid Straight Edge  
No. 48-RS—48" Long Rigid Straight Edge

No. 75-RS — 75" Long Rigid Straight Edge  
No. 108-RS—108" Long Rigid Straight Edge  
No. 144-RS—144" Long Rigid Straight Edge

No. 48-T — 48" Long T-Square  
No. 75-T — 75" Long T-Square  
No. 108-T—108" Long T-Square  
No. 144-T—144" Long T-Square

**NEW**

### COMBINATION EDGES

Improve the quality of your tufted carpet seams with a Serpent Edge Seam that will not peak!! This wavy design prevents "hinging action," because the carpet edges criss-cross the center line of the tape. Also, Serpent Seams are stronger because there is more length of seam on the same amount of tape—compared to a straight seam. The curves are gentle and easy to follow with a knife. The straight side is provided for resilient work. Made from  $\frac{1}{8}$ " thick rust resistant galvanized steel. Both sides are precision ground, and "easy to follow" instructions are supplied with each tool.

No. 119—75" Combination Edge


No. 119S—36" Combination Edge

### NON-SLIP ALUMINUM CARPET STRAIGHT EDGES

Made from hardened aircraft aluminum alloy, with a clear anodized finish. The corrugated back prevents creeping. Both models are  $\frac{1}{8}$ " thick x  $2\frac{1}{2}$ " wide, and are economically priced.

No. ASE-48—48" long

No. ASE-75—75" long

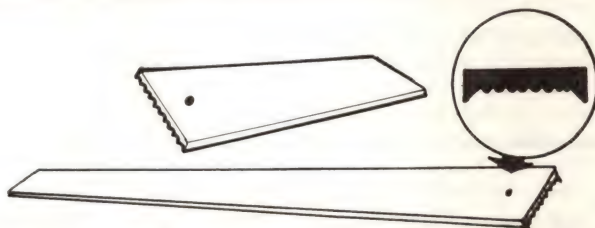

### FLEXIBLE STEEL STRAIGHT EDGES



No. 18-FS—18" Long Flexible Straight Edge  
No. 32-FS—32" Long Flexible Straight Edge  
No. 39-FS—39" Long Flexible Straight Edge  
No. 75-FS—75" Long Flexible Straight Edge

Ideal for small spaces like doorways, halls, and closets. Also used for feature strip cove, and wall work. The nature of this tempered and blued spring steel prevents the accuracy found in our Rigid Steel Straight Edges. These are 2" wide, and can be coiled for carrying in a tool box. One end has a  $45^\circ$  mitre, and a nail hole is provided in the other end.

### ADJUSTABLE ALUMINUM STRAIGHT EDGES

No. 121-SE—Ideal for doorway cutting work—for carpet and resilient installers. Has  $\frac{1}{8}$ " thick members having square edges. It is 18" long, opens to 34", and has friction tension positioning.

No. AST-30—Has  $\frac{5}{16}$ " thick members that have partially bevelled edges. It is  $19\frac{3}{4}$ " long, opens to 37", and is locked in position by simply twisting a knob head screw.

### No. GS48-HD ALUMINUM T-SQUARE

This heavy duty model features an offset head  $\frac{3}{8}$ " thick x  $1\frac{1}{2}$ " wide x 24" long. It extends 6" on one side of the blade, and 16" on the other side. Four rivets assure permanent accuracy for the lifetime of the tool. The graduated heat treated blade is  $\frac{3}{16}$ " thick x 2" wide x 48" long. Large distinct numerals read from both ends. All edges are smooth and square.

### ALUMINUM STRAIGHT EDGE RULES




These graduated Straight Edge Rules are  $\frac{1}{8}$ " thick x 2" wide, and have smooth, square, and straight edges. They are made from flexible bend resistant aluminum, and will lie flat. Numerals read from both ends.

No. SE48—48" long

No. SE72—72" long



NEW

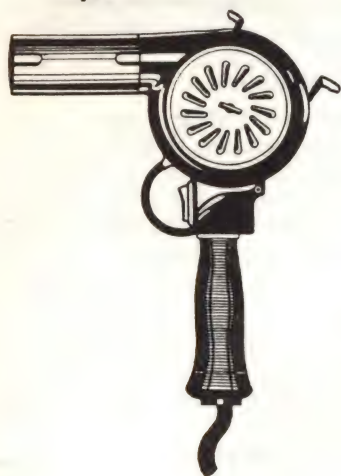

PROVIDE MODERN FLAMELESS HEAT FOR HOT CUTTING, BENDING AND FORMING FLOOR TILE, SHEET GOODS, COVE BASE, VINYL MOULDINGS AND PLASTIC LAMINATE.

**Check these advantages:**

- Will NOT discolor or blister all kinds of floorcovering or plastic laminate material!
- Gives a full blast of heat immediately after the switch is turned on—saves time!
- Eliminates the bother, time, and expense of fuel procurement.
- Gives flameless heat with no danger of damaging walls, doors, and other surfaces and items.
- Has a louvered intake cover that can be adjusted to vary the temperature and the air velocity. Temperature is variable from 500° to 750° F.
- New, long life, 3 position (Hot, Off, Cold) rocker type switch is standard. Allows blowing of room temperature air. Equipped with new, self lubricated motor.
- As illustrated, equipped with a stand for stationary use. Stand does not interfere with portable use.
- Draws 14 Amps on 115 VAC and is equipped with a 6 ft. 16/3 wire grounding type cord with a molded plug.
- Housing made from sturdy, yet lightweight magnesium die castings with a tough plastic handle. Weighs only 2½ lbs.
- U.L. Listed



**REPLACEMENT HEAT ELEMENT KITS**

Gun No.	Kit Stock No.
750	755-K
755-X*	755-K
750-X*	751-K
750-XLK*	751-XLK
1000-X*	1001-K

\*Discontinued Heat Gun Model Numbers

**NOTE:** Because they can be abused, heat elements are not guaranteed against breakage caused by either improper cooling or rough handling.

Replacement parts are carried in stock. For stock number information, refer to the Parts List which is packed with every Heat Gun.

**Helpful Hint:** You can prolong the life of the Heat Elements in these Guns by allowing the unit to operate on the COLD setting for a minute or two—before turning off. This gives the Heat Element a chance to cool slowly.



**No. 190 ELECTRIC HEAT GUN**

Considered the "Hottest" 15 Amp Gun on the market! Has a variable temperature output range from 650° to 900°F. Simply adjust the air intake regulator for higher or lower heat. The Housing, Handle, Trigger Guard and Stand are all made from rugged impact-resistant plastic. Lightweight (only 2¾ lbs.), and less tiring to handle!

Has many quality construction features such as a built-in circuit breaker, which protects the tool and the user. Also has a unique suspended heating element design, which prolongs its life. The toggle control switch has hot-cold-off positions. The double-jacketed nozzle and shield help maintain cool exterior temperatures.

Supplied with a stand that can easily be adjusted to any horizontal or vertical angle, or removed if desired. Has a 5 ft. 14/3 wire grounding type cord with a molded plug. U.L. Listed Roberts brand.

**No. A-1181**—Replacement Heat Element Kit

**STANLEY HANDYMAN SCREWDRIVERS**

Have large tough plastic handles with a comfortable grip. The round alloy steel blades are rust-resistant plated, and are firmly anchored in the handle. The "Cushion Core" plug expands under load to resist movement of the driver bar. Tips are cross ground for nonslip fit in screw slots. Reasonably priced.


**No. 64-864**—Blade: 4" Long x 1/4" Diam. x 1/4" Wide tip x .037" Thick Tip

**No. 64-866**—Blade: 6" Long x 5/16" Diam. x 5/16" Wide tip x .041" Thick Tip

**No. 64-868**—Blade: 8" Long x 3/8" Diam. x 3/8" Wide tip x .050" Thick Tip


**No. 65-321**—Blade: 3" Long x 3/16" Diam. for #1 Phillips Head Point

**No. 65-322**—Blade: 4" Long x 1/4" Diam. for #2 Phillips Head Point

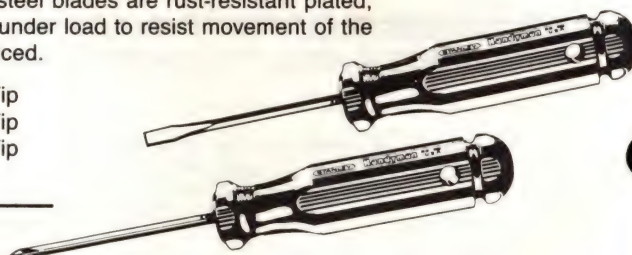



# REFILLABLE PROPANE EQUIPMENT for the FLOORCOVERING TRADE




No. B-91 BLOW TORCH  
W/No. 491-5 TIP ASSEMBLY




No. 491-5 TIP ASSEMBLY  
ONLY



No. 2C TRIGGER VALVE  
ONLY W/No. 491-5 TIP



No. C-20 CYLINDER



No. B-91T BLOW TORCH  
W/No. 2C TRIGGER VALVE AND  
No. 491-5 TIP



No. 5-HT HOSE TORCH  
W/No. 2T TRIGGER VALVE  
AND No. 491-5 TIP



No. 10-H HOSE



No. 4-FH FILLER HOSE

**No. B-91 BLOW TORCH W/No. 491-5 TIP ASSEMBLY**—This type provides a broad straight flame which spreads the heat quickly. The manually operated valve provides instant heat up to 425° F. Torch is 11" high overall and the cylinder without the handle is 4" in diameter. Holds about 1 lb. of propane gas.

**No. B-91T BLOW TORCH W/No. 2C TRIGGER VALVE AND No. 491-5 TIP**—Same as No. B-91, except it is equipped with the very popular trigger valve that has a pilot flame that saves gas and the trouble to frequently relight.

## SEPARATE COMPONENTS FOR ABOVE TORCHES:

**No. B-91-C CYLINDER ONLY,  
W/VALVE**

**No. 491-5 TIP ASSEMBLY ONLY**  
**No. 2C TRIGGER VALVE  
W/No. 491-5 TIP**

**No. 5-HT HOSE TORCH W/No. 2T TRIGGER VALVE & No. 491-5 TIP**—This torch has a pilot flame, and is used on jobs that require a large amount of fuel. The hose connects from the vapor valve on the cylinder to the torch. Has a large comfortable handle.

**No. 10-H HOSE**—Is 10 ft. long, and has a No. 58 Nut on one end, and a male POL fitting on the other end. Used with a No. 5-HT Hose Torch and a No. C-20 Cylinder.

**No. C-20 CYLINDER**—Used with the No. 5-HT Hose Torch for large jobs. It is 12 1/4" in diameter, and 18 1/2" high to the top of the collar. Weighs 20 lbs. empty, and holds approximately 20 lbs. of propane. The collar has a hand hole for convenient carrying. The POL type valve is equipped with a pressure relief and outage valve. (Note: This cylinder has a vapor withdrawal valve only. It cannot be used to fill a No. B-91, nor No. B-91T, as these torches require filling from a liquid withdrawal system.)

**No. 4-FH FILLER HOSE**—Has same fittings as No. 10-H Hose, and is used to fill Blow Torches from larger reservoir cylinder. The No. 71-A Filler Adapter (No. 58 Nut to female POL) may be needed at some propane filling stations.

Illustrated Repair Parts Lists and Filling Instruction Cards are Available

NEW

## TURNER PROPANE TORCHES AND ACCESSORIES



### No. OT-86 SELF IGNITING TORCH

This torch is easier, faster, and more convenient to light!! This self igniting Torch eliminates the need for matches or a spark lighter. Desirable for work in tight places, since it can be used with either hand, and in any position. To light, simply squeeze the lower, and then the upper trigger. Flame is easily adjusted from high to low. Comfortable and well balanced, it mounts directly on a fuel cylinder. Or, a No. 90-046 Hose can be used between the Torch and a cylinder. A safety lock prevents accidental ignition. Torch is 15" long, and weighs under 3 lbs. with full fuel cylinder attached. Price includes a No. LP-175 Cylinder.



### No. LP-999 TORCH KIT

This popular kit includes everything needed for a wide variety of jobs: 14.1 oz. Propane Fuel Cylinder, Standard Pencil Point Burner Assembly, Standard Brush Flame Tip, Chisel Point Soldering Tip, Flame Spreader Tip, and Spark Lighter. Packed in a metal case with latch and carrying handle. Includes operating instructions for safe use.



### No. LP-175 PROPANE FUEL CYLINDER

Fits standard propane torches. Disposable cylinder contains 14.1 oz. net weight propane fuel. Cylinder is self sealing upon removal of burner assembly. Supplied as standard equipment with other Turner Torches or Kits on this page.



### No. LP-5555 TORCH

Has Standard Pencil Point Burner Assembly and 14.1 oz. Propane Fuel Cylinder for general purpose work. U.L. Listed fuel valve ensures positive shutoff. Includes operating instructions for safe use.



### No. HT-522 BRUSH FLAME BURNER ASSEMBLY

Gives a standard brush type flame desirable for resilient tile work.



### No. HT-603 PENCIL POINT TIP

Standard Pencil Point Tip is desirable when a smaller flame is needed. Orifice included.


### No. HT-511-OR2 ORIFICE ONLY



### No. LP-968 BLAST FURNACE TIP

Same tip as supplied on the No. LP-967 Burner Assembly. Gives 1" wide flame. Orifice included.

### No. LP-967-OR2 ORIFICE ONLY 15



### No. 90-046 ADAPTER HOSE

An added convenience for use with the No. OT-86 Torch. This high pressure hose is 4 ft. long, and can be used with the other Turner Burner Assemblies shown on this page. Also fits many other brands. Has a valve on the cylinder end, and supplied with a cylinder stand.



### No. HT-533 FLAME SPREADER TIP

Produces a broad flat flame. For use on either Pencil Point or Brush Flame Tips.

### No. LP-967 TRIG-R-TROL BURNER ASSEMBLY

Convenient trigger action burner with Blast Furnace Tip that leaps from a small pilot flame to a large, 1" wide blast of heat instantly! Pilot flame saves fuel between operating periods. One hand operation.





## 4" REPLACEABLE BLADE SCRAPERS


Both of these scrapers are widely used for a variety of floor, wall, and countertop work. They are especially useful for removing sponge carpet backing. The angled blade holding heads, plus the razor sharp blades, provide "clean shaving" cutting action. Supplied with one blade, installed backwards for safety.

Newly redesigned, these top quality scrapers are sturdily made and will give years of dependable service! The No. 790 has three blade clamp screws and a longer handle for tougher jobs. Both models feature a comfortable vinyl handgrip and case hardened screws to resist slot wear. Both use the No. 695 Blade shown below. Every mechanic ought to have both of these scrapers!

No. 690  
12" SCRAPER

No. 790  
18" SCRAPER

4" REPLACEMENT BLADES for No. 690 and No. 790 SCRAPERS:




No. 695-10—10 per Tube



No. 695-C—100 Bulk per Box

## BIG SCRAPERS

Uses 8" Replaceable Blades



No. 375S

No. 375

Scrape faster and with less work because you can always have a razor sharp blade! Length on both models is adjustable for maximum comfort—kneeling or standing. Adjustment is quick and easy! Not recommended for heavy duty prying floor removal work. Supplied with one blade, installed backwards for safety.

No. 375 — Long Big Scraper, Adjustable from 39"-59"

No. 375S—Short Big Scraper, Adjustable from 19"-26"

8" REPLACEMENT BLADES for Above Scrapers

No. 376-3—3 per Tube

No. 376-9—9 per Tube

24 95

No. 8584-3—Has an offset handle and an extra stiff blade that is beveled and sharpened on all 3 sides. A design that is highly favored with many mechanics. Blade is 3" wide, and overall length is 11 1/4."

No. 6S-3—A straight blade tool with a stiff blade of the finest cutlery steel. The polished walnut handle is securely riveted to the metal lap bolster. Blade is 3" wide, and overall length is 8"

No. L4504-3—A long handle scraper that is preferred by some mechanics because it permits 2 hand gripping for the more stubborn jobs. The stiff blade is 3" wide, the handle is 6 1/2" long, and the overall length is 10 3/4."

No. 525-3—A heavy duty scraper with an extra stiff straight blade for your toughest jobs—such as removing ceramic wall tile. The blade and bolster are a one piece forging for maximum strength. Absolutely the finest scraper on the market. Blade is 3" wide, and overall length is 8 1/4."

No. 2BE-1-1/8—Mechanics like this knife for "spooning in" hot cuts on asphalt and vinyl composition tile. The stiff blade is 1 1/8" wide, and is bent on a "just right" 35° angle. From the "Green River Works" line which is the best made for the professional. Overall length is 6 5/8."

No. 2S-2—The finest putty knife that is made. The top grade of tool steel used in the straight 2" wide stiff blade is expertly hardened and tempered, and has a rust preventative coating. Overall length is 7 3/8."

## FLEXIBLE BLADE SCRAPERS

A professional quality tool. The blades are made from the best grade of tool steel. They are hardened, tempered, uniformly ground, and polished to a smooth finish. The laminated wood handle is comfortably shaped. Brass rivets are used to fasten this handle to the tang portion of the one-piece forged blade. Many mechanics like to notch some sizes for use as cove base adhesive spreaders.

### STOCK NUMBERS:

No. 3F—1-1/4 — Putty Knife

No. 3F—2 — Putty Knife

No. 3F—3 — Scraper


No. 3F—3-1/2 — Scraper

No. 3F—4 — Scraper

No. 3F—5 — Scraper

No. 3F—6 — Spachtling Knife


## No. 3223 RAZOR BLADE SCRAPER



A popular low cost tool. For work where extreme sharpness is required. It is helpful for scraping on smooth surfaces like glass or tile. This tool is only 1/4" thick, and is 1 3/4" wide x 4" long. The 1 5/8" wide single edge blade retracts for safety when not in use. One blade is supplied.

No. 3271—Replacement Blades, 5 per Pkg., 10 Pkgs. per dispenser box



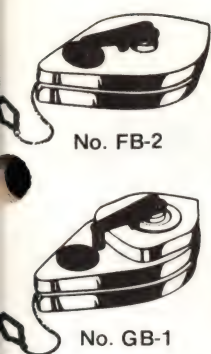

## CHALK LINE REELS

Both of these boxes feature a great filling method! This is a slotted self sealing rubber grommet, in which the spout from an 8 oz. squeeze bottle is simply inserted. This eliminates the possibility of messy and wasteful spillage! The non-breakable "Cyclocac" plastic cases are lighter weight. The lines are made from spun polyester, and are 100 ft. long and have a hook ring. This material has the tough strength of nylon, plus the chalk holding capacity of cotton! Both models have positive line locking mechanisms.

The No. GB-1 is geared type box that rewinds 3 to 4 times faster than regular reels! The nylon gears are self lubricating. Simple finger pressure applied to the handle permits free-wheeling of the line going out — without the handle turning. Try either of these models next time — you'll like it!

No. KL-100 — 100 ft. replacement line for both models


## GUNDLACH ULTRA-FINE CHALK POWDER

A specially formulated blend of talcum powder and limestone. It is milled to a finer consistency for more positive and distinct marking. Available in both the popular 8 oz. squeeze bottle and the economical 5 lb. plastic jug — both with easy fill spout.

- No. 8-W — 8 oz. White
- No. 8-B — 8 oz. Blue
- No. 8-R — 8 oz. Red
- No. 105-W — 5 lb. White
- No. 105-B — 5 lb. Blue



## CHALK LINE REELS



**EVANS BRAND**—Have a lightweight die cast aluminum case featuring a sliding wedge type line locking mechanism that automatically releases when rewinding. Has a super tough nylon line with a hook ring. The handle lies flush with the case while pulling out the line. The plumb bob cap twists off for filling, and has a gasket that prevents leakage.

- No. CL50 — 50 ft. Long
- No. CL100 — 100 ft. Long
- No. RL50 — Repl. Line
- No. RL100 — Repl. Line


**STRAIGHT-LINE BRAND**—A popular good quality economically priced durable aluminum alloy box. Has an easy-to-hold sure-grip shape. Fill by simply sliding open the nylon cover. Has a self-locking handle and a plated anchor ring. The cotton line is highly absorbent for positive marking, and is replaceable.

- No. 125-50 — 50 ft. Long
- No. 125-100 — 100 ft. Long
- No. 50-RL — Repl. Line
- No. 100-RL — Repl. Line

## TOP GRAIN COWHIDE LEATHER TOOL AND KNIFE POUCHES




No. 407—1-Pocket Box Shaped—4" wide x 7½" high.



No. 407-FL—Same as No. 407, except has a pocket flap.



No. 408—Same as No. 407, except is fiberboard lined for greater personal protection.




No. 408-FL—Same as No. 407-FL, except is fiberboard lined for greater personal protection.




No. 354—1-Pocket Flared Shape with pocket flap—4½" wide x 7" high.




No. 409—1-Pocket Flared Shape—5" wide x 8" high.




No. 410—2-Pocket w/ Hammer Loop—5" wide x 8" high.



No. 415—3-Pocket Utility—6½" wide x 8½" high.



No. 700—3-Pocket Box Shaped—5" wide x 6½" high x 1½" deep.



No. 439—Hammer Holster—steel cradle loop design holds it snugly.



**No. 67 KNIFE POUCH**  
Specifically designed for all angular shaped knives. It is fiberboard lined to protect you and the pouch. A snug fit keeps the knife from falling out, but is not too tight for easy removal.




**No. 449 UTILITY KNIFE POUCH**

Made to accommodate all brands of knives. Pocket is securely fastened by 10 rivets. Has belt slots and a hang up hole.



**No. 416X LEATHER WORK BELT**

For use with above tool pouches. Made from the finest top grain cowhide, has a bright plated steel buckle, and is natural tan leather color. It is 1½" wide, and fits waist sizes from 30" to 46" (cuts off to your size). Economically priced, and can also be worn for semi dress.



**No. DPW9 QUICK CLIP**


Saves time and aggravation. Clip slips through pouch belt slots, and then hangs directly on a belt or trousers. Eliminate belt loosening, and pouch threading. Economically priced.



# No. RM-81 FLOOR STRIPPER MACHINE


(U.S. Patent No. 4,330,938, Canadian Patent No. 1,167,640)

This machine has been the choice of mechanics selected to compare it with more cumbersome, heavier models on the market! At just 37 lbs. operating weight, it packs the power to remove glued down floor covering such as carpet, resilient tile, linoleum, and vinyl sheet. It can also be used in industrial applications such as grease buildup on floors, adhesives, paint, ink, or even to remove ice from walkways.

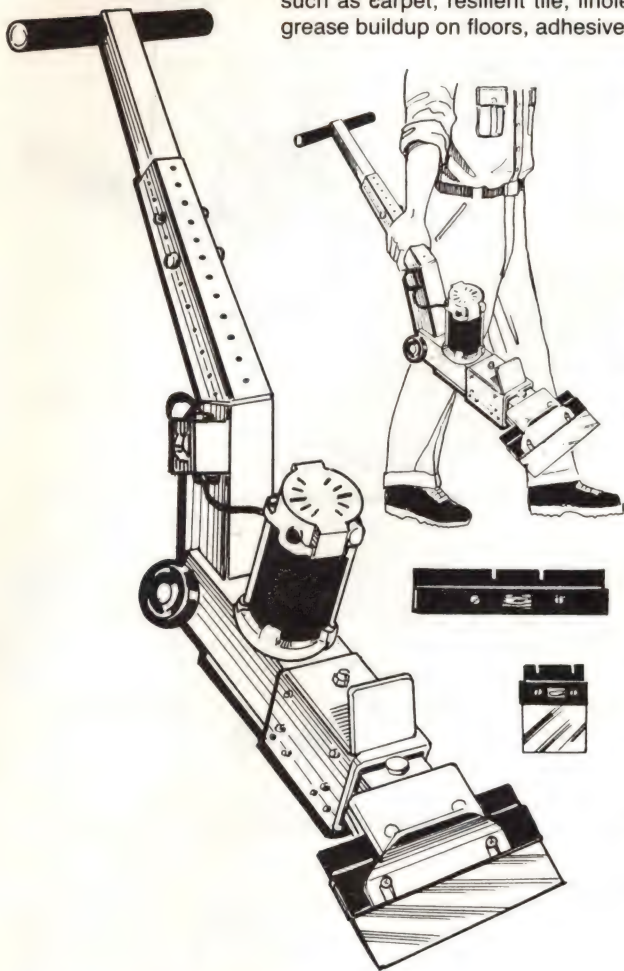

## CHECK THESE ADVANTAGES AND FEATURES

- Lightweight—Only one person needed to carry to and from the job!
- Highly maneuverable, works right up to walls, glass doors, gas pipes, under toe spaces, and baseboard heaters.
- Far less vibration, and machine is equipped with comfortable foam hand-grips.
- Machine design allows work to remain constantly in view, increasing operator speed and efficiency and preventing costly mistakes such as damaged cabinets in residential kitchen jobs.
- Works equally well on both concrete and wood floors.
- Relatively quiet operation permits use in hospitals, nursing homes, hotels, and other public buildings.
- Handle length is easily adjusted for operator comfort.
- Compact size permits convenient storage.
- Removable wheels are supplied for ease of repositioning machine during use.
- For long wear, the Piston-Head Assembly is protected top and bottom by large, replaceable oil impregnated bronze wear plates. The Piston-Head Assembly easily removes for wear plate inspection and the machine is adjustable for wear.
- A standard grease fitting is top mounted for ease of lubrication.
- Specially designed motor operates on standard 115 VAC service and is equipped with an 18/3 wire grounding type cord with a molded plug.
- Supplied with a No. 148 6" and a No. 130-SB 10" Blade and a 6" 10" and 16" Blade Carrier.
- Has a 6 month Limited Warranty on parts and workmanship.
- Instructions, and an Illustrated Parts List, are included.

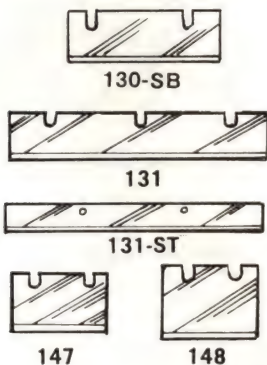

## REPLACEMENT BLADES FOR FLOOR COVERING STRIPPER MACHINES


These blades are made from hardened and tempered spring steel, and they consequently give excellent results and service. They fit the Roberts Nos. 10-460 and 10-462, the Roofing Equipment Nos. 460 and 462, the Taylor No. 901, the Crain No. 700 Bearcat, the Gundlach No. RM-81, and the "Big Rip-Off" machines.

No. 130-SB	3" x 10"	For removing glued down carpet - for more stubborn work.
No. 131	3" x 16"	For removing glued down carpet - for regular work.
No. 131-ST	1 1/2" x 16"	Stiffener for No. 131 Blade.*
No. 147	4" x 6"	For removing tile from concrete floors.
No. 148	5" x 6"	For removing tile from wood floors.

\*The function of the No. 131-ST is to add a greater degree of rigidity to the No. 131 Blades. This is desirable for some job conditions.

## No. 950 MEASURING WAND - MEASURES CARPET ROLLS QUICKLY AND ACCURATELY WITHOUT UNROLLING!

(U.S. Patent No. 3,785,055)

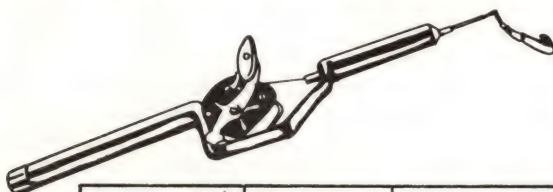

Save money by measuring incoming carpet rolls and discovering yardage errors—before paying invoices! Also save time and labor expense at inventory by eliminating measuring by the unrolling method. One person can measure a roll in minutes—even if the roll is at the bottom of the stack. This premium quality model is easy to use and provides unexcelled performance. It utilizes a heavy duty fishing reel and a nylon coated steel line that will not stretch. The line is calibrated from 1 to 150 ft. and can be used on all types of carpet. Complete operation instructions are supplied.

No. 950-1—Replacement Line for No. 950



Start from roll core

Travel the Rule pointer through the carpet laps.

Rotate the line completely outside the last lap to the end.



6995




### No. 214 CARPET KICKER

First choice of the majority of professional installers. The most valuable feature is the tooth depth adjustment mechanism. The 16 porcupine teeth can be dialed to 16 settings in 1/32" increments — to adjust for pile heights and desired penetration. When desirable to use the 3 "Nap Grip" inserts (in the head), the teeth can be completely retracted. The "Nap Grips" are used on lightweight or low pile carpets.

Adjustable length is the next valuable feature. There are 5 positive lock settings from 17½" to 21½". Next, the comfortable seamless foam filled Bumper Pad can be switched to 4 positions for even wear distribution. A snap-on plastic Pin Cover is supplied to protect the teeth when not in use. An instruction booklet, including an illustrated parts list, is also supplied. All replacement parts are stocked. This is a time tested and proved model.


## PRESSURE SENSITIVE TAPES FOR CARPET INSTALLATION WORK



### SILVER CLOTH PAD TAPE

Also known as Duct Tape. Has a strong cloth base coated with polyethylene. Flexible, and bonds permanently. Has water-proof backing, is noiseless, and tears easily.

No. 285—2" x 60 yds.



### PAPER PAD TAPE

A most economical tape! Made from softer paper for noise reduction. A really important feature is that carpet glides easily over the silicone treated top. Flexible, and has a quick release.

No. 286—2" x 55 yds.



### DOUBLE FACED FIBERGLASS CLOTH CARPET INSTALLATION TAPE

Top professional quality! Won't rot from weather. Ideal for outside installation. Adheres to all types of subfloors. High-tack adhesive will not dry out. Very strong—must be cut with a knife or scissors.

No. 288—2" x 25 yds.



### WHITE DOUBLE FACED CARPET INSTALLATION TAPE

Made from a blend of vinyl and polypropylene, this heavy gauge 5½ mil material has exceptionally strong and lasting holding power. Great for professional or D-I-Y use. It has a quick and easy release from its silicone paper liner. Can be used indoors or outdoors. Ideal for patio, pool, or other wet areas, since it is waterproof and chemical resistant. We ship fresh stock only, and it is available in the two most popular sizes.

No. V850-14—1½" x 14 yds. (1 Roll per display package with installation instructions, 24 Rolls per carton).

No. V850-25—2" x 25 yds. (Bulk packed, 24 Rolls per carton)



### STRAPPING TAPE

A popular glass filament reinforced tape. Used extensively for tying carpet rolls, metal mouldings, sealing cartons, and many other uses.

No. 289—¾" x 60 yds.



No. 89 DISPENSER—A handy dispenser for strapping tape up to 1" wide. Economically priced.

### No. 951 STAND-UP CUTTER

**The Fastest, Easiest, and Cheapest Way to Cut Carpet and Sheet Goods!** A very simple tool to use - for cutting room work or on the job. No high expense and the maintenance connected with electric cutters. Cuts by the standing-walking method. Cuts with inexpensive, easily replaceable utility knife style of blade. Easy to follow chalk lines, and make 90° turns.

This cutter glides along on a ball bearing "heel" and the open throat design accepts even the heaviest shag. The handlebar is 16" wide for easy steering. Height is 40" and is chrome plated.




No. 953-5 REPLACEMENT DOUBLE-BEVEL BLADES—These special blades are required for the No. 951 Cutter as ordinary utility blades will not fit. 5 per Pkg., 20 Pkgs. per box.



### No. 192 CARPET ROLLER

This 30 lb. roller is designed for glue-down carpet installation work, where rolling is recommended by the manufacturer. It is made completely from steel. Each of the 3 separately acting roller sections is 3" in diameter, and 4¼" wide. The overall height is 36", and the handle is equipped with comfortable plastic grips.

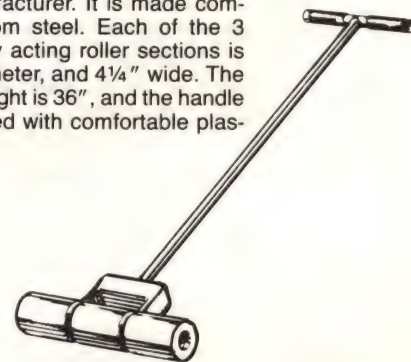






### No. KT-150 DELUXE CARPET STRETCHER

This deluxe model is the favorite of many installers! It is a sturdy, **extra powerful** unit in a **lightweight** custom contoured plastic case that has space for 6 tubing sections. It adjusts from 33" to 22 ft. with 4 tubing sections. The forged aluminum handle is the **longest and strongest** of any Junior Stretcher. It delivers abundant power for easy working and the handle is **guaranteed for life against breakage**. The 14" wide head has 60 rust resistant nickel plated pins for better load distribution, and a pin penetration adjustment bar. A low friction polyethylene tape is affixed to both top and bottom of the rubber cushioned tail block for easier sliding when repositioning. The Swedged Tube gives 2 extra 2" long adjustments for greater flexibility. Supplied complete with Swedged Tube, Head Assembly, Tail Block Assembly, Case, and **4 each No. 402-TS Tubing Sections with new, exclusive one-piece spring clips, guaranteed for life against breakage**. Weighs only 54½ lbs.

**No. KT-15C** —Plastic Case only for No. KT-150

**No. KT-150-HA** —Head Assembly with Swedged Tube for No. KT-150

**No. KT-150-LC** —Stretcher Complete, without the No. KT-15C Case

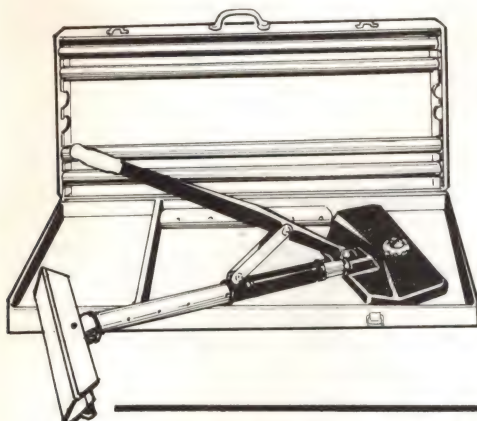

### No. 400-CS JUNIOR POWER CARPET STRETCHER

Features a 14½" wide metal pin plate that holds 59 rust resistant nickel plated pins for heavy duty work. Pin depth is adjusted by a knob conveniently located on top of the head. One head handles all weights of carpet. The lightweight cast aluminum head is angled at the rear of both sides to allow side kicking. 14" wide swivel tail block has a non-marring cushion for non-slip work. A low friction polyethylene tape is affixed to both top and bottom of the tail block for easier sliding when repositioning. Supplied with a sturdy steel carrying case that has storage capacity for 6 tubing sections in the lid. Minimum operating length is 34½", and opens to 22 ft. with 4 tubing sections. More tubing can be added for longer stretches. Supplied complete with an adjustable 14" Transfer Tube, Head Assembly, Tail Block Assembly, Case, and **4 each No. 402-TS Tubing Sections with new, exclusive one-piece spring clips, guaranteed for life against breakage**.


**No. 403-RC**—Case only for No. 400-CS

**No. 400-KP**—Head Assembly with Transfer Tube for No. 400-CS

## GRACO AIRLESS SPRAY AND PRESSURE ROLLER SYSTEMS For Application of Spray Type Floor Covering Adhesives

### No. EM-390 AIRLESS SPRAY SYSTEM

Used with spray type adhesives, this sprayer cuts adhesive application time by as much as 60% over trowelling methods. Powered by a ½ HP TEFC (Totally Enclosed Fan Cooled) motor, this unit atomizes adhesive by forcing it through an orifice under high pressure. Has a stainless steel 60 mesh filter and a hard chrome plated stainless steel pump for abrasion and corrosion resistance. Supplied with a patented **Reverse-A-Clean IV Switchtip (RAC IV)** .017" carbide tip orifice that gives a 10"-12" fan width (when tip is held 12" from floor). With the **RAC IV Switchtip**, blockages are easily dislodged by reversing the tip with a twist of a knob and blowing out the blockage. The unit is easily cleaned by flushing with water. A second flush with an oil based mineral spirits provides light internal lubrication. Pump motor has a 3 wire grounding type cord and operates on 115 VAC. System includes the No. 221-517 RAC IV Switchtip, 50' x ¼" ID static free hose with spring guards, 3' Whip hose with spring guards, pump unit, and spray gun. Optional accessories and replacement parts are shown below.

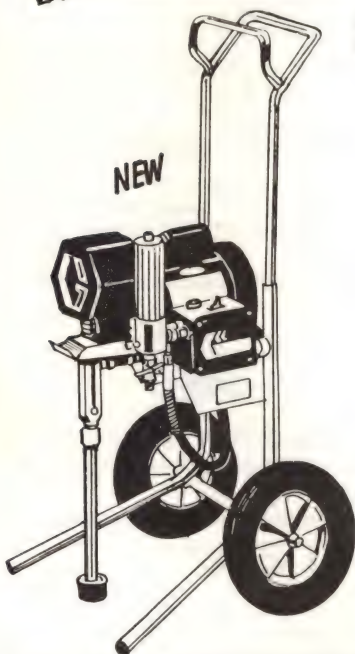

### No. PT2000 PRESSURE ROLLER SYSTEM

This professional roller system is ideal for applying adhesive in smaller areas where overspray would be a problem, or where a smaller, lower cost unit is desired. Compact and lightweight, this unit features an 18"-36" telescoping extension, control valve, pump unit, and a ½" nap x 9" long roller cover.

**No. 107-590**—Repl. Roller Cover

**No. 218-625 AIRLESS GUN PRESSURE ROLLER**—Easily attaches to the No. EM-390 System to apply adhesive by rolling. Especially useful for small areas and near walls to eliminate overspray problems. Includes a No. 107-590 ½" nap x 9" long roller cover.



**TIP EXTENSION TUBES**—Allows operator to remain upright to prevent back strain caused by bending over to maintain proper tip distance from floor. Available in 2 lengths. **A Tip Adapter and a Gun Nut are required. Order separately.**

**No. 218-245**—18" Tube ONLY

**No. 218-246**—24" Tube ONLY

**No. 180-136**—Tip Adapter

**No. 180-137**—Gun Nut



### RAC IV SWITCHTIPS

**No. 221-517**—.017" carbide tip orifice gives a 10"-12" fan width.

**No. 221-617**—.017" carbide tip orifice gives a 12"-14" fan width. Note: Application is faster with this tip as it covers a larger area, **but** with a thinner coat of adhesive.



**No. 210-541 BLUE HOSE**—50' x ¼" ID airless system static free hose for replacement, or extension. Hose exterior is tough urethane to resist abrasion, wear, and aging.




## No. 402-TS TUBING SECTIONS

Features new and exclusive one piece spring clips! **Cannot Break!** Spring clip "buttons" have a gentle curve for more comfortable and easier adjusting. Tubing is made from carbon steel to resist bending, and is chrome plated to slide freely for easy adjustment. Length is  $34\frac{7}{16}$ " closed, and  $61\frac{1}{4}$ " open. Adjustable in 4" increments. Fits all other stretchers except Taylor and Roberts Senior models. Designed not to fall apart when carried in a vertical position. **Spring Clips are guaranteed for life against breakage.**



## No. 5090 CORNER SUPPORT


**Solves the problem of stretching from an outside corner!** Can be used to stretch to the right or left. Made from steel, it is covered with  $\frac{1}{8}$ " thick rubber to prevent damage to walls. Weighs 2 lbs. and is  $9\frac{1}{2}$ " long overall, 3" inside each leg, and  $\frac{1}{2}$ " thick.

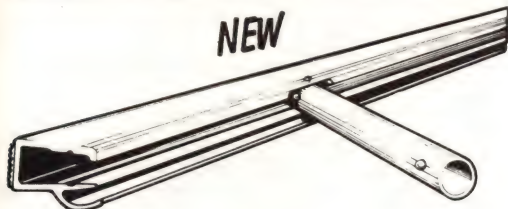

## No. 4200 42" TAIL BLOCK

Prevent wall punctures with this tail block! 42" length **always** bridges at least two wall studs (on 16" centers) and will also cover a 36" doorway. Fits all Junior Stretchers, except Taylor. Used with a No. 1400-K Tail Tube (standard with Gundlach Nos. 400-CS and KT-150 Stretchers). With a Roberts No. 10-228-18 Adaptor Tail Tube, it can also be used with a Roberts Senior Stretcher No. 10-222. Made from a sturdy lightweight extrusion, it will clear quarter round moulding. Has a non-marring cushion for non-slip work and a low friction polyethylene tape on top and bottom for easier sliding when repositioning. **Price does NOT include No. 1400-K Tail Tube.**



**No. 1400-K** — Tail Tube W/Spring Clips (2)

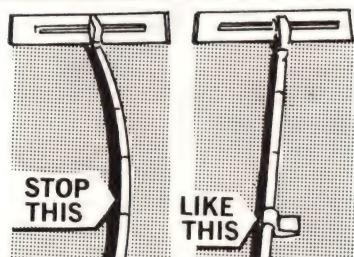

## No. 1467 STRETCHER TUBE SUPPORT

### PREVENT TUBE DAMAGE ON L-O-N-G STRETCHES!

Don't waste money by needlessly bending perfectly good tubing sections! Eliminate this possibility by using a Tube Support. It takes very little space in a tool box, and is fast and simple to use. It fits all brands of round tube Stretchers, and slides along with the tube for positioning at any point. It "digs in" for absolutely positive holding power when under strain. Works equally well on all types of carpet, including the thick plush pile styles.

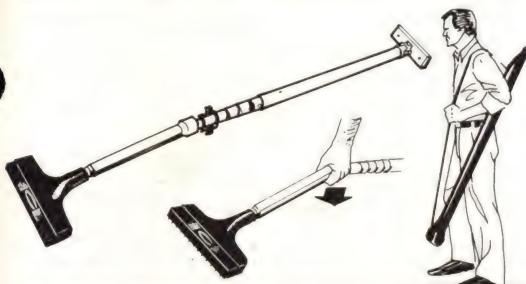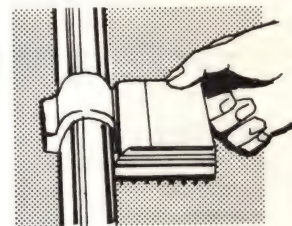


## No. KT-100 TELEBLADE CARPET STRETCHER

This compact unit is ideal for room size work. Stores complete in a canvas carrying case with a shoulder strap. Lightweight at 28 lbs., it is easy to carry and great for work that has to be reached by stairs, such as apartments. Uses 7 telescoping chrome plated tubes for quick setup. Any adjustment up to 20 ft. is possible through use of the Clutch Brake Assembly at the First Tube.

Stretching is done by pushing down on the end of the handle at the point where it connects with the tubing. The 10" wide head has 35 rust resistant nickel plated pins, and a 2 screw pin penetration adjustment. The 8" wide tail block is cushioned with a non-marring molded rubber pad.

## BIGELOW STYLE CARPET CUTTERS




### No. 301-CBC CUSHION BACK CUTTER

Redesigned for tight weave gauges of rubber back carpet. The slender beveled guide makes it easy to stay in the rows. Has a blade on both sides for cutting either side of the row, and the 30° blade angle prevents tearing. Blades "snap in" and "snap out," and 5 are included.



### No. 302-CLC CUSHION LOCK CUTTER

For straight cutting of sponge back carpeting. Has both a right and a left side blade that are easily clicked to the up or down position. Permits closest trimming to either side of the pile for perfect seam work. Blade set on a 60° angle. Blades "snap in" and "snap out," and 5 are included.



### No. 303-LPC LOOP PILE CUTTER

Designed for cutting straight row loop pile carpets. It can easily be guided through the rows for perfectly straight cuts. The elevated position of the blade prevents it from touching the cutting floor. Has a comfortable hand contoured wood handle. Blades "snap in" and "snap out," and 5 are included.

## No. 501 ADJUSTABLE CUSHION BACK CUTTER

Has the big advantage of blade depth adjustability for thicker carpets! Thumb screws lock blades in position to prevent slippage. Dense carpet can be cut because the leading and middle guides are tapered. Both blade slots are set on a 30° angle, and close cutting can be done on either side of the row. Maximum cutting depth is  $\frac{3}{8}$ ". Nickel plated for rust prevention, and has a contoured wood handle. Uses slotted razor blades and a tube of 5 is included.



**NEW**




## No. 59 CARPET ROW CUTTER

(U.S. Patent No. 3,859,725)


Designed to cut carpet from the back giving a cleaner cut every time! Patented spring action lets blade follow rows easier. On thin commercial carpets, seams can be double cut—for greater perfection. **No Special blades needed**—uses any utility knife or trimmer blade. Made from sturdy cast aluminum for a "lifetime" of service.



## A WIDE SELECTION OF SLOTTED RAZOR BLADE CARPET CUTTING KNIVES



**No. 215**—Uses only a single clamping screw for quick blade changing. Slim, polished profile means this die cast aluminum knife won't hang up on carpet yarns. Screw is case hardened to resist slot wear. Extra blades can be stored in the handle.



**No. 7-AK ANKR-TRIM**—Polished die cast aluminum handle is "full bodied" for comfortable gripping. Leaving the rear screw slightly loose permits the halves to pivot when the front screw is removed—allows quicker blade changing. Screws are case hardened to resist slot wear. Extra blades can be stored in the handle.



**No. 124 FLIPPER**—Simply pull the lever, and this knife swings open for blade changing or depth adjustment. Blade can be extended to  $\frac{5}{8}$ " or completely retracted. Die cast zinc handle.



**No. 720 HINGED**—Features a safety stop for thumb protection and better cutting control. Remove one screw and pull open the die cast aluminum handle to change blades. Screw is case hardened to resist slot wear. Extra blades can be stored in the polished handle.



**No. 217-CK**—This knife has textured metal in the gripping area for positive slip-proof control. Made from polished die cast aluminum, it has blade storage space in the handle, and is supplied with 3 blades. Screws are case hardened to resist slot wear.



**No. 107 OFFSET**—This offset design makes it easier to trim against the wall. Also good for cutting under toe spaces, in doorways, and other hard-to-reach places. Has solid aluminum construction.



**No. 154 HINGED**—A partial turn of a thumb screw is all that is needed to open this knife—no tools required! Features a flat, slim profile for close-to-the-floor cutting. Made from die cast aluminum, handle has storage space for extra blades.



**No. 112 SWINGER**—Simply twist the special rectangular nut to loosen, and then slide open the halves of this knife for fast blade changing. The comfortably shaped die cast zinc handle has storage space for extra blades.



**No. KT-1670 DO-IT-YOURSELF**—This low cost blue plastic knife has a comfortable contoured grip. Has a slip resistant safety thumb rest. Blade depth is adjustable. No tools needed to change blades—simply remove the knurled nut. Supplied with 2 blades.



ROUND CORNER





SQUARE CORNER

### HEAVY DUTY BLUE TEMPERED SLOTTED RAZOR BLADES

Nationwide acclaimed to be **THE TOP QUALITY Blade!** Finest grade of cutting steel, expertly honed, for sharper edges. Heavy Duty .017" Gauge—stronger blade means less breakage, greater economy! Blue Tempered cutting edge lasts much longer with less chipping! Fewer changes—saves time, aggravation. Available in popular round corner style, and square corner style—for easier starting of puncture type cuts. Each blade is individually wrapped for safety. Available in economical dispenser boxes, or tubes, as below.

Corner Style	Stock No.	Packaging
Round Corner	308-5	5 per Tube, 24 Tubes per Box
Round Corner	308-C	100 per Dispenser Box
Square Corner	309-C	100 per Dispenser Box


NEW

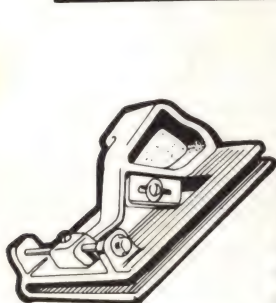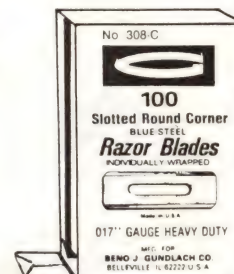

(U.S. Pat. No. 4,148,142)


### No. 830 CARPET BASE CUTTER

The only tool that lets you make your own wall base. Made from lightweight aluminum castings, it can be adjusted for any width from  $1\frac{1}{8}$ " minimum to  $4\frac{3}{4}$ " maximum. Cuts any type of carpet. Uses a slotted razor blade. Easy to use, and supplied with instructions and a heavy duty blade.



### No. 58-BD BRAD PUSHER

Drives and countersinks brads up to 1" long, 16 to 19 Ga.—with only one push. It features a magnetic pickup and a comfortable wood handle. Driving action is straight and true! A particularly valuable tool for tight corners and hard to reach places. Weighs only 3 oz., and is 7" long.

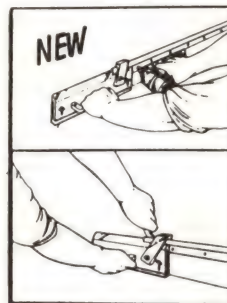

### No. 818 COVE CAP FEEDER

This innovative tool allows faster, easier, and more accurate installation of cove cap. No more time consuming chalking of walls, as this tool automatically holds the cap in proper position, always parallel to the floor. Height is adjustable from 4" to 6", and tool is 11" long for convenient storage in a toolbox. Weighs only 1 lb.

### HARDENED HEADLESS STEEL BRADS

Frequently used on rubber and vinyl cove base and coved linoleum installations. They have a sharp needle point  $\frac{1}{16}$ " long, and can be sunk out of sight into the material. They hold material in place until the adhesive sets on curves and "wrap around" corners. For your protection, always wear safety goggles when using these brads. 1000 each per package.

**No. 58-H**—.058" Diameter x  $\frac{5}{8}$ " Long

**No. 78-L**—.036" Diameter x  $\frac{7}{8}$ " Long


**No. 78-H**—.058" Diameter x  $\frac{7}{8}$ " Long





## CONVENTIONAL BACK CARPET TRIMMERS

### No. 245 DELUXE



These Wall Trimmers both cut in either direction, and both have a 4-position adjustable throat feature to accommodate carpets of varying pile height. Likewise, cutting height adjustments are made by using one or more of 4 shims that are each 1/16" thick.

The angled stainless steel wall runner prevents marking, and all other steel parts are plated for rust prevention.


Blade changing is fast and convenient, as blades are installed from the top. The blades

are securely held in position by clamps and lock nuts. For replacement blades, use the Universal Trimmer Blades shown below.

The metal handle on the No. 245 is vinyl coated for comfort. Also, it features a ratchet adjustment system that provides 5 working positions - including a horizontal position for working under toe spaces.

The contour shaped and lacquered hard maple handle on the No. 246 is not adjustable.

### No. 246 ECONOMY



## CONVENTIONAL AND CUSHION BACK CARPET TRIMMERS


### No. KT-330 — for Conventional Back Carpet



Both feature a patented height and width adjustment system that doesn't use troublesome shims or spacers. Simply uses a knob and a dial. They can cut in both directions safely and accurately. The No. KT-330 guide toe pushes the carpet edge into the gully in one operation. Both molded plastic handles lock securely in 3 working positions. Rust proof stainless steel construction. No. KT-330 uses No. G-640-10 or No. G-642-C Universal Carpet Trimmer Blades shown below. No. KT-360 uses No. 308, or No. 309, Slotted Razor Blades shown on Page 24. Both tools are supplied with Blades.




### No. KT-360 — for Cushion Back Carpet



### No. 196-CCC CUSHION BACK TRIMMER

Ratchet type handle can be attached on either side of the tool for both right and left hand use. It can also be adjusted for a low profile to cut under toe spaces. Cuts all around a room because it cuts in either direction, and all the way into corners. Has a calibrated heel plate to adjust for different carpet thicknesses. Uses No. 308, or No. 309, Slotted Razor Blades shown on Page 24.



For Conventional Back  
(Jute & Synthetics)  
Carpet

## UNIVERSAL CARPET TRIMMER BLADES


Use with Conventional Back Trimmers above and all popular brands. Heavy duty .017" thick blades are notched for a precise fit. High carbon tempered cutlery steel for long-lasting edges. Edges are single bevelled and expertly honed.

No. G-640-10—10 per Tube, 10 Tubes per Box

No. G-642-C —100 Bulk per Box


## No. 401 MITRE BOX—For Metal Moulding

EXTRA  
W-I-D-E

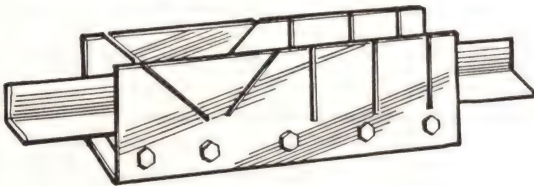

The 3 1/4" inside width makes this the widest floorcovering mitre box on the market! It accommodates all sizes of floorcovering metal trims. It is 3" high overall x 10 1/2" long, and has a 3/4" thick hardwood base. Has 5 hacksaw slots for all popular angles. The 3/16" thick steel sidewalls are hardened for wear resistance, and painted for rust prevention. See other Mitre Box selections on Page 38.

## No. 490 MITRE BOX

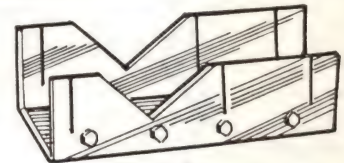

Small, but highly practical for floorcovering metal mouldings. Conveniently fits in a tool box, and weighs only 3 lbs. The 1/4" thick steel sidewalls are case hardened to resist wear and maintain accuracy. Stands level for freehand use anywhere on the job. The hardwood base is notched at both ends to allow the use of C-clamps to hold the moulding while sawing. Measurements are 8" long x 1 5/8" inside height x 2" inside width.

No. 491 MITRE BOX — Same as No. 490 except furnished with two 1" C-clamps having a 1" throat depth.



## No. 166-DB MAGNETIC DRIVING BAR

An improved model for nailing tackless strip in hard-to-reach places, such as under radiators, wall heaters, in cabinet toe spaces, etc. Also, an especially valuable tool for damage free work in areas adjacent to brick hearths, stone masonry, plate glass windows, baseboard mouldings, glass doors, etc.

The tip is now magnetized, and this new model is guaranteed for life against breakage. The vulcanized rubber covered handle eliminates vibration stinging for user comfort.

Forged from tough manganese alloy steel, has a rust-proof black finish. Can be used on all types of subfloors, including concrete. Weighs 4 lbs., and is 1" wide x 4" high x 13" long.





**NEW**



### No. 900 GLUE GUN


Solid state heating system assures constant glue temperature, and has no moving parts to wear out! This top quality gun has an unbreakable nylon body, and is engineered to prevent glue leakage at the nozzle and the back. Patented feed mechanism insures a positive glue stick grip. Stand holds gun in safe position while heating. Solid state design also permits use on any AC voltage from 100 to 240, with proper adaptor. Equipped with a 1/16" nozzle, the gun uses 7/16" diameter glue sticks. Weighs 14 oz. Has a 12 month warranty.

**NEW**



### No. 208 GLUE GUN

Features solid state electronic heating system to assure constant glue temperature. High impact plastic housing has a comfortable, contoured grip trigger control. A removable fold-down stand holds gun in safe position while heating. The ball type check valve controls flow upon release of trigger. Uses 7/16" diameter glue sticks. 1/16" diameter nozzle and instructions are included. Weighs only 11 oz. UL Listed.



### OPTIONAL EXTRA NOZZLES (FOR Nos. 208 & 900 GLUE GUNS)


No. 2628—1/4" Diameter x 1 1/2" long  
No. 2629—1/8" Diameter x 1 1/2" long

### No. 210 GLUE GUN KIT

Features a tough double wall plastic case. Consists of a No. 208 Glue Gun, a No. 2628 and No. 2629 Nozzle, and an assortment of three types of 4" long glue sticks. The case has an insert with nesting places for all these items.



**NEW**



### HOT MELT GLUE STICKS

Specially formulated for carpet seaming and repair work, glue dries clear for best appearance. 7/16" diameter, available in 4" and 10" length. With 10" sticks, less time is lost from frequent reloading and preheating.

**NEW**

Length	Stock No.		
4"	No. 219-25 Box of 25	No. 219-C Box of 100	No. 219-BULK 25 lb. Box (Approx. 1100 count)
10"	No. 438-12 Bag of 12	No. 438-V 5 lb. Bag (Approx. 88 count)	No. 438-BULK 25 lb. Box (Approx. 440 count)



### No. 167 CORNER TRIMMER

Used on cushion back carpet to cut inside corners left by some brands of trimmers. The offset design affords a firm grip, and eliminates knuckle rubbing. Blade can be adjusted by merely loosening and tightening one wing nut. The end opposite the blade can be used to depress the carpet for a close fit at the wall. Uses slotted razor blades and a tube of 5 is included.




### No. 129A 3-IN-1 SEAM CUTTER

For seam cutting of conventional and cushion back carpet, indoor/outdoor carpet, and sheet vinyl. Has a 2 1/2" W x 5 1/2" L clear plastic base for stability. An extendable guide bar permits use with a straight edge, or the cutter can be used free hand. 30° blade angle with cutting depth up to 3/4"—sufficient to cut double thicknesses. Uses slotted razor blades, one supplied.



### No. 143 DISPOSABLE ADHESIVE SYRINGE & NEEDLE

Solves air bubble problems quickly. For glue down carpet trouble spots—and vinyl sheet goods. Can assist with seam problems. 2" hollow point tapered needle delivers adhesive to the trouble area with invisible puncture. Adhesive capacity is 2 oz. Low cost—just throw it away. Item can't be sold into some states because of drug laws. States are Maine, New Hampshire, Massachusetts, Connecticut, Rhode Island, New York, New Jersey, Maryland, and Delaware.

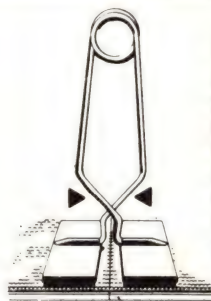

### No. 180 SEAM SQUEEZER

Make perfect seams on cushion back carpet with the help of this tool. Powerful spring squeezes equally from both sides to give the necessary tension during adhesive open time. Spring tension is adjustable as needed. Slanted pins in the 2 5/8" wide gripper plates prevent slipping. Excellent for repair work. Sold in sets of 2.

Cushion Back Carpet.



### No. 729-CCC SEAM ADHESIVE APPLICATOR BOTTLE


A premium quality plastic bottle that features a cleverly designed nozzle that is adjustable for varying thicknesses of sponge backing. The adhesive can be applied precisely where it is needed to do the best job! Capacity is 8 oz., and bottle contains illustrated instructions.



### No. 145 SEAM ADHESIVE APPLICATOR BOTTLE

An extremely useful tool for seaming work on glue down carpet installations. This is an 8 oz. size soft plastic squeeze bottle, and it has illustrated and printed how-to-use instructions on it. Supplied with a special nozzle, and a snap-on storage cap.



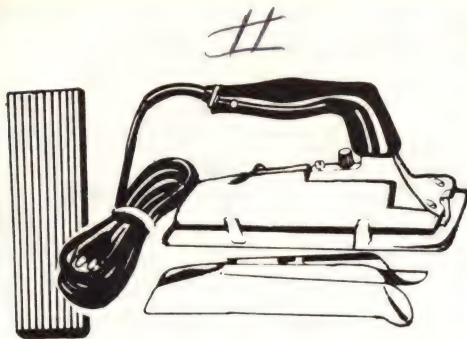

## HOT MELT CARPET SEAMING IRONS

No. 177-FB — Flat Bottom


No. 177-GB — Grooved Bottom

These are a time tested top quality brand, and can be used for both back and face seaming. The contoured top permits easy movement under the carpet edges when face seaming, and pre-heats the back for a better bond. The optionally available grooved bottom prevents the adhesive from flowing out the sides from too much operator pressure. Has an adjustable thermostatic heat control with an indicator light, and a 10 ft. long 3-wire safety cord. Supplied complete with a Holder and a Shield. The Shield reduces the amount of heat for face yarn and backing protection. These irons are U.L. Approved, and meet OSHA Standards. Hot Melt Seaming instructions are also supplied.

## HOT MELT IRON KITS

No. 176-FBK - Contains No. 177-FB Flat Bottom Iron

No. 176-GBK - Contains No. 177-GB Grooved Bottom Iron

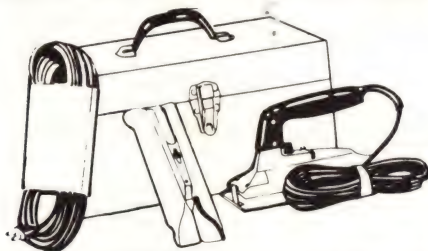

Popular with installers, since they provide a neat and secure place for all the necessary heat and seaming tools in a sturdy steel carrying case. Kit includes a Hot Melt Iron (with Holder and Shield), a No. 267 25 ft. 3-wire Extension Cord, and the No. 175 Case. Space is also provided in the Case for a roll of hot melt tape. With this Kit, you can put a hot iron (in the Holder) into it without endangering the other contents. **No. 175 Steel Case only, for Iron Kit - can be purchased separately.**

## EXTENSION CORDS - All of these are UL Listed and Meet OSHA Requirements for Indoor Service



**No. 0655 "POWER-CENTER" CORD**—This 3 ft. "shorty" is a convenient and versatile extension for your longer cords. It provides 3 outlets—instead of one! It can be attached to any #14/3 (or heavier) cord. The flat vinyl jacket is safety-orange color, and it has a capacity of 15 Amps, for the total of 3 outlets.




These heavy duty cords all have round safety-orange jackets, which are less apt to twist or tangle. They also better resist cutting from rolling objects. The tough vinyl jacket remains flexible at below zero temperature. It strongly resists oil, grease, acid, and abrasions. These 3 cords also meet OSHA requirements for Outdoor use.

Stock No.	Length	Wire	Max. Amps.
267	25 ft.	#16/3	13
625*	25 ft.	#14/3	15
626	50 ft.	#14/3	15


\*This cord is recommended (for adequate power) by Duo Fast for use with its No. EN 5418 Electric Tacker.

SEE PAGE 52 FOR ADDITIONAL LONGER AND/OR HEAVIER WIRE CORDS

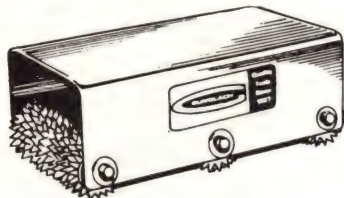

## No. 476 "CARPET TRACTOR" (U.S. Patent No. 241,704)

AN AMAZING MULTI-PURPOSE TOOL FOR IMPROVING CARPET SEAM QUALITY AND APPEARANCE!

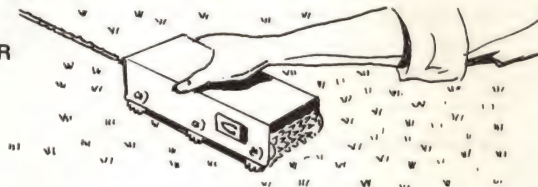

Eliminate bad looking seams with this easy-to-use tool! It works well on ALL types of carpet—including hard-to-seam materials like artificial tight weave short nap commercial carpet, and plush pile carpet—with ALL types of seaming and bonding methods. The top performance of this tool results from the unique patented 3-row offset roller action. This provides a twirling action that blends the nap, to effectively hide seams—even poorly cut seams can be improved! For wall as well as floor work—on both flat and irregular surfaces.

Ideal for hot melt seaming work. The hardened steel spike teeth provides tremendous pressure on the seam line—precisely where it is needed! This insures a thorough bond of the adhesive with the carpet backing, resulting in a flat seam. Following a seam with hand pressure can cause waviness. Following a seam with a tool box, or some

other flat metal object, can cause color shading problems because some synthetic yarns change color from heat retention. Rapid cooling occurs when using the **CARPET TRACTOR**. The benefits of the 3-row offset roller action makes this tool superior to single row rollers. It causes hot yarns, which have suffered "memory loss" to simply blend together for attractive flat hidden seams!


The shape of the **CARPET TRACTOR** conforms comfortably to the hand, and using it for long periods produces much less wrist and arm fatigue than do single handle type rollers. It weighs only 2 lbs. and easily fits in a tool box as it is 6½" long, 3" wide and 2¼" high. It is plated for rust prevention to allow use on wet cleaning jobs (where seam shrinkage has occurred) without causing rust stains.

NEW

## No. 648 ALUMINUM SEAMING BOARD


This sturdy Aluminum Board assists in reducing peaking and overlapping problems with hot melt carpet seaming. This board assures the best possible bond between carpet and seaming tape! Measuring ⅛" X 6" X 48", it will not hang up on tackless strip pins like home-made wooden seaming boards. Nor, will it delaminate when you try to scrape it clean. Unlike the narrower, and more expensive flexible teflon seaming "Boards", this rigid board provides solid support over the softest pad. The slot in the front of the board guides the tape, and is also a convenient carrying handle.

In pairs, these boards double as appliance skids for reinstalling major appliances. Use of these boards prevents marring or cutting of newly installed floors.

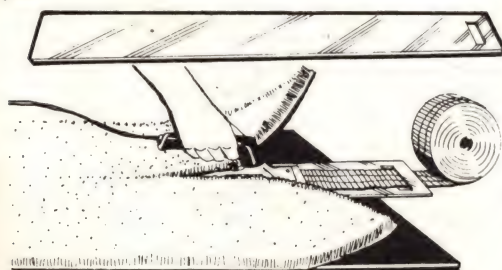



# KENNEDY TOOL BOXES.....Famous for Quality Construction

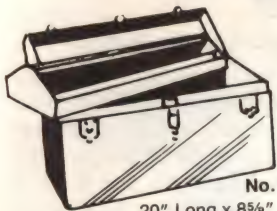

**No. K-20**  
20" Long x 8 5/8" Wide x  
9 5/8" High—12 5/8 lbs.




**No. 1018**  
18" Long x 10" Wide x  
12 5/8" High—18 lbs.


**No. K-20 and No. K-24**—Medium priced all purpose boxes with a lift out tote tray. Made from heavy gauge steel with capped end construction. Has flat top design, and a full length piano type hinge. Tote tray has 2 full length compartments. Boxes have 2 side catches and a center draw bolt hasp. Finished with a dark brown rippled enamel.

**No. 1018 and No. 1022**—These are extra ruggedly constructed for heavy duty service. The ends are double seamed for extra strength where it is needed, and three skid rails are welded to the bottom for added rigidity.

These hip-roof style boxes have four cantilever trays. Sturdy tray levers permit easy opening and closing even when fully loaded. These boxes have a comfortable vinyl coated full grip handle. The No. 1022 (only) has a socket set divider in one top tray.

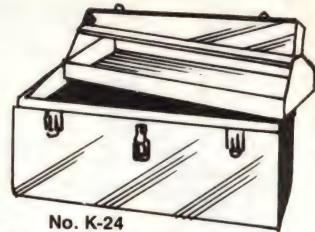

**No. K-24**  
24" Long x 8 5/8" Wide x  
9 5/8" High—  
14 1/8 lbs.

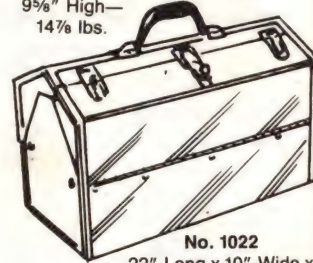

**No. 1022**  
22" Long x 10" Wide x  
12 5/8" High—20 3/4 lbs.

## STANLEY HAMMERS

### FIBERGLASS HANDLE

Handle is made from straight continuous fiberglass filaments for maximum strength and best balance. Exclusive permanent taper design eliminates possibility of the head coming off. The octagon pattern head is heat treated for extra toughness. The "Rim-Tempered" face reduces chipping, and the vinyl hand grip is perforated and contoured for a firm comfortable grasp.

- No. 51-041**—16 oz. Curved Claw
- No. 51-042**—20 oz. Curved Claw
- No. 51-050**—16 oz. Ripping Claw
- No. 51-051**—20 oz. Ripping Claw



### HICKORY HANDLE

Has octagon pattern handle and head. Handle is flame finished, and lacquer sealed against moisture. Heat treated high carbon steel head features a "Rim-Tempered" face to reduce chipping. All models have a plain face head.

#### NAIL MODELS

- No. 51-160**—16 oz. Curved Claw
- No. 51-200**—20 oz. Curved Claw
- No. 51-161**—16 oz. Ripping Claw
- No. 51-201**—20 oz. Ripping Claw

#### FRAMING MODELS

- No. 51-820**—22 oz. Ripping Claw
- No. 51-824**—28 oz. Ripping Claw



## ECONOMY NAIL HAMMERS



These feature polished octagon steel heads, married to tough Ozark hickory handles. Available in 4 popular models, they offer excellent value.

- No. 416C**—  
16 oz. Curved Claw
- No. 420C**—  
20 oz. Curved Claw
- No. 416R**—  
16 oz. Ripping Claw
- No. 420R**—  
20 oz. Ripping Claw

## STANLEY "DEAD BLOW" HAMMERS

Hundreds of metal shot in the head provide no rebound striking. Much less fatiguing to use! One piece cast urethane, with a steel reinforcing rod in the handle. Two head styles. **SOFT FACE**—non marring—for wherever a rubber mallet is used. Great for spotnailing! **STEEL FACE**—for nailing tackless strip and general use.



Stock No.	Face Diam.	Head Length	Overall Length	Wt. Lbs.
57-532	2"	4 1/4"	12 3/4"	2
54-516	1 1/4"	4 1/8"	12 3/4"	1

## STAIR TOOLS



**No. 261**  
3 1/2" Wide  
Blade

Used to drive carpet into a stair crotch. Both are forged from tough chisel type alloy steel, and are bright nickel plated to resist rust and corrosion. Blades are ground to the correct smooth slim taper, and oversize heads resist hammer damage. Both are 8" long, but two blade widths are available.



**No. 262**  
2 1/4" Wide  
Blade

## RUBBER MALLETS

Widely used by carpet layers and ceramic tile setters. This top quality brand provides longer service than lower cost, lesser quality models. Has sturdy contoured hardwood handle. All sizes available in economy black and non-marking white head styles.



	Face Diameter	Head Length	Handle Length	Head Weight
<b>No. 349-1B</b> (Black) or <b>No. 349-1W</b> (White)	2 1/4"	3 1/8"	10"	12 oz.
<b>No. 350-2B</b> (Black) or <b>No. 350-2W</b> (White)	2 1/4"	3 3/4"	11"	20 oz.
<b>No. 351-3B</b> (Black) or <b>No. 351-3W</b> (White)	2 1/2"	4 1/2"	13"	28 oz.





### No. 61-5 CARPET HAMMER

Preferred by many mechanics because the long head makes corner work easier. Has a claw at one end, and is well balanced. The polished  $\frac{5}{8}$ " diameter head is one piece forged with the handle. Oval shaped walnut wood is securely riveted to the steel handle. Head is 7" long. Overall length is 11", and weighs 18 oz. A top quality tool!

### No. 222 MAGNETIC HAMMER

Forged from a special grade tool steel. The head is highly polished. Guaranteed to hold magnetism permanently. Has a tough hickory handle, and is perfectly balanced. Magnetic face is  $\frac{5}{16}$ " diameter, and the large face is  $\frac{1}{2}$ " diameter. Length of head is  $5\frac{3}{4}$ ", overall length is  $10\frac{3}{4}$ ", and weighs 14 oz.



### No. 540 ANKORITE TOOL and PINS

A special tool designed for fast and easy anchoring of carpets in areas where carpet ends to no abutment. Can also be used for stair work. The advantage of this tool is that the heads of the special pins are hidden by the carpet fibers. Only the special **No. 091** Ankorite Pins may be used with this tool. Pins are .054" diam. x  $\frac{1}{2}$ " long, and are packed 1 lb. per box.


No. 091

### STANDARD CARPET SPREADERS

These tools feature a stiff gauge rustproof stainless steel blade with a comfortable hardwood handle. Mainly used while carpet stretching to hook the carpet to the tackless strip. Blade is  $10\frac{1}{4}$ " wide, and is available both with and without notches — to suit your preference.

**No. 485** — with Notches

**No. 486** — without Notches




## TACKLESS STRIP CUTTERS

### No. 104

Has 2 replaceable blades that provide easy cutting from both the top and the bottom. The Handle locks in 3 positions: closed, half way for cutting  $9/32$ " strip, and full open for cutting thick strip. Economically priced. All steel parts are plated. The handle is vinyl cushioned, and can be locked in the closed position. A storage compartment in the handle holds 4 extra blades. Blades are wide enough to make diagonal cuts.

**No. 105-10**—Replacement Blades, 10 per Tube  
(Also fits Roberts No. 10-104)

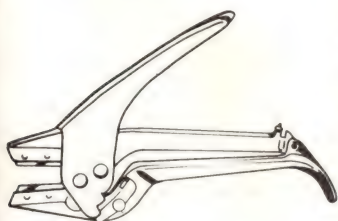

3350



### No. 908

This is a metal anvil type of shears, featuring a hand honed upper blade for quick and clean cutting. Wiss brand, famous for quality. Has powerful built-in leverage, and extra frame rigidity, for heavy duty cutting. Fully nickel plated to prevent rust. Handles are knurled for non-slip gripping. Anvil is long enough to cut strip on a 45° angle. Overall length is 8". Economically priced.



### No. 122T TACKLESS STRIP CUTTER

A 2-blade by-pass model that has amazing cutting power, and Teflon-S coated blades for non-stick easy cutting. The sharp slender blades are made from a special process heat treated steel that resists nicking from the pins. Has easy-to-see comfortable bright orange molded vinyl hand grips. Can be locked in the closed position. Length of cut is 2", overall length is  $8\frac{1}{2}$ ", and weighs only  $\frac{1}{2}$  lb.




### WISS METALMASTER® AVIATION SNIPS

Jaws are hot drop-forged from special molybdenum steel for wear resistance, and to withstand the severe strain of cutting curves. Cutting edges are serrated to prevent slip page. Designed to transmit extra power through the compound leverage. Recommended for cutting 18 gauge (.049") and lighter sheet metal. All models have non-slip vinyl grips for greater cutting comfort. Widely used by carpet installers and ceramic tilesetters.

See Page 53 for Tin Snips

Stock No.	Direction of Cut	Handle Color	Length of Cut
M-1R	Left*	Red	$1\frac{3}{8}$ "
M-2R	Right*	Green	$1\frac{3}{8}$ "
M-3R	Straight	Yellow	$1\frac{1}{2}$ "

\*These models also cut straight.

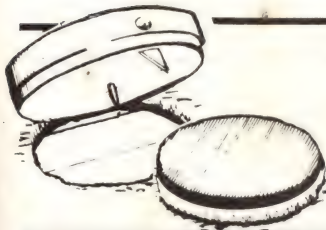


### No. 725-CCC COOKIE CUTTER

A bargain priced repair tool for damaged or stained areas of sponge back carpet. Made from lightweight molded plastic. It uses a stationary pivot pin and a replaceable blade to cut a 3" diameter circle. Has a plastic cap to protect the pin and blade, and how-to-use instructions are stored in the cap. Great for professional use or over-the-counter sales to Do-It-Yourself customers.

**No. 726-RB**—Replacement Blades, 4 per Pkg.

### No. 615 MAGNETIC NAIL HOLDER

An ideal tool for starting and driving nails into concrete, and in hard-to-reach places, without the danger of hurting your fingers. Also protects the flange on metal floor mouldings from damage. The magnet points the nail properly and automatically if it is picked up by the head. Made from stainless steel, the  $5/8$ " hexagon is just the right size and weight for convenient working. Tool is  $5\frac{1}{2}$ " long overall.

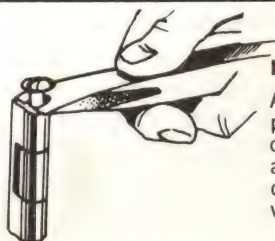


### No. 362 DOOR PIN TOOL


A newly designed tool that removes door pins faster, easier, and without causing damage. The forked end fits snugly around the head, and equal pressure can be applied to both sides. A really valuable asset to every tool box.



# KENNEDY TOOL BOXES.....Famous for Quality Construction

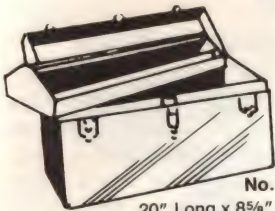

**No. K-20**  
20" Long x 8 $\frac{5}{8}$ " Wide x  
9 $\frac{5}{8}$ " High—12 $\frac{5}{8}$  lbs.

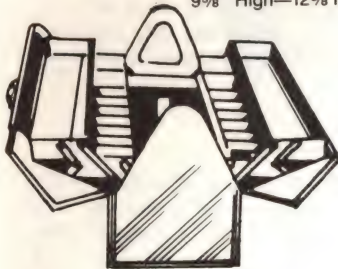


**No. 1018**  
18" Long x 10" Wide x  
12 $\frac{5}{8}$ " High—18 lbs.


**No. K-20 and No. K-24**—Medium priced all purpose boxes with a lift out tote tray. Made from heavy gauge steel with capped end construction. Has flat top design, and a full length piano type hinge. Tote tray has 2 full length compartments. Boxes have 2 side catches and a center draw bolt hasp. Finished with a dark brown rippled enamel.

**No. 1018 and No. 1022**—These are extra ruggedly constructed for heavy duty service. The ends are double seamed for extra strength where it is needed, and three skid rails are welded to the bottom for added rigidity.

These hip-roof style boxes have four cantilever trays. Sturdy tray levers permit easy opening and closing even when fully loaded. These boxes have a comfortable vinyl coated full grip handle. The No. 1022 (only) has a socket set divider in one top tray.

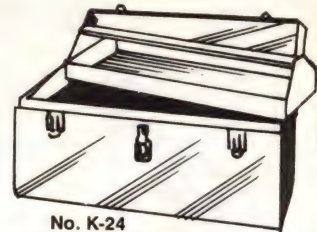

**No. K-24**  
24" Long x 8 $\frac{5}{8}$ " Wide x  
9 $\frac{5}{8}$ " High—  
14 $\frac{5}{8}$  lbs.

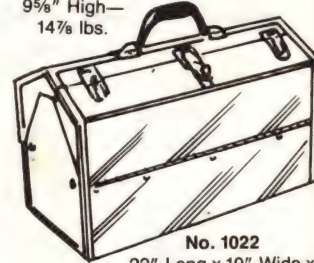

**No. 1022**  
22" Long x 10" Wide x  
12 $\frac{5}{8}$ " High—20 $\frac{3}{4}$  lbs.

## STANLEY HAMMERS

### FIBERGLASS HANDLE

Handle is made from straight continuous fiberglass filaments for maximum strength and best balance. Exclusive permanent taper design eliminates possibility of the head coming off. The octagon pattern head is heat treated for extra toughness. The "Rim-Tempered" face reduces chipping, and the vinyl hand grip is perforated and contoured for a firm comfortable grasp.

- No. 51-041**—16 oz. Curved Claw
- No. 51-042**—20 oz. Curved Claw
- No. 51-050**—16 oz. Ripping Claw
- No. 51-051**—20 oz. Ripping Claw



### HICKORY HANDLE

Has octagon pattern handle and head. Handle is flame finished, and lacquer sealed against moisture. Heat treated high carbon steel head features a "Rim-Tempered" face to reduce chipping. All models have a plain face head.

#### NAIL MODELS

- No. 51-160**—16 oz. Curved Claw
- No. 51-200**—20 oz. Curved Claw
- No. 51-161**—16 oz. Ripping Claw
- No. 51-201**—20 oz. Ripping Claw

#### FRAMING MODELS

- No. 51-820**—22 oz. Ripping Claw
- No. 51-824**—28 oz. Ripping Claw



## ECONOMY NAIL HAMMERS



These feature polished octagon steel heads, married to tough Ozark hickory handles. Available in 4 popular models, they offer excellent value.

- No. 416C**—  
16 oz. Curved Claw
- No. 420C**—  
20 oz. Curved Claw
- No. 416R**—  
16 oz. Ripping Claw
- No. 420R**—  
20 oz. Ripping Claw

## STANLEY "DEAD BLOW" HAMMERS

Hundreds of metal shot in the head provide no rebound striking. Much less fatiguing to use! One piece cast urethane, with a steel reinforcing rod in the handle. Two head styles. **SOFT FACE**—non marring—for wherever a rubber mallet is used. Great for spotnailing! **STEEL FACE**—for nailing tackless strip and general use.



Stock No.	Face Diam.	Head Length	Overall Length	Wt. Lbs.
<b>57-532</b>	2"	4 $\frac{1}{4}$ "	12 $\frac{3}{4}$ "	2
<b>54-516</b>	1 $\frac{1}{4}$ "	4 $\frac{1}{8}$ "	12 $\frac{3}{4}$ "	1

## STAIR TOOLS

Used to drive carpet into a stair crotch. Both are forged from tough chisel type alloy steel, and are bright nickel plated to resist rust and corrosion. Blades are ground to the correct smooth slim taper, and oversize heads resist hammer damage. Both are 8" long, but two blade widths are available.



**No. 261**  
3 $\frac{1}{2}$ " Wide  
Blade



**No. 262**  
2 $\frac{1}{2}$ " Wide  
Blade

## RUBBER MALLETS

Widely used by carpet layers and ceramic tile setters. This top quality brand provides longer service than lower cost, lesser quality models. Has sturdy contoured hardwood handle. All sizes available in economy black and non-marking white head styles.



	Face Diameter	Head Length	Handle Length	Head Weight
<b>No. 349-1B</b> (Black) or <b>No. 349-1W</b> (White)	2 $\frac{1}{4}$ "	3 $\frac{1}{8}$ "	10"	12 oz.
<b>No. 350-2B</b> (Black) or <b>No. 350-2W</b> (White)	2 $\frac{1}{4}$ "	3 $\frac{3}{4}$ "	11"	20 oz.
<b>No. 351-3B</b> (Black) or <b>No. 351-3W</b> (White)	2 $\frac{1}{2}$ "	4 $\frac{1}{2}$ "	13"	28 oz.





### No. 61-5 CARPET HAMMER

Preferred by many mechanics because the long head makes corner work easier. Has a claw at one end, and is well balanced. The polished  $\frac{5}{8}$ " diameter head is one piece forged with the handle. Oval shaped walnut wood is securely riveted to the steel handle. Head is 7" long. Overall length is 11", and weighs 18 oz. A top quality tool!

### No. 222 MAGNETIC HAMMER

Forged from a special grade tool steel. The head is highly polished. Guaranteed to hold magnetism permanently. Has a tough hickory handle, and is perfectly balanced. Magnetic face is  $\frac{5}{16}$ " diameter, and the large face is  $\frac{1}{2}$ " diameter. Length of head is  $5\frac{3}{4}$ ", overall length is  $10\frac{3}{4}$ ", and weighs 14 oz.



### No. 540 ANKORITE TOOL and PINS

A special tool designed for fast and easy anchoring of carpets in areas where carpet ends to no abutment. Can also be used for stair work. The advantage of this tool is that the heads of the special pins are hidden by the carpet fibers. Only the special **No. 091** Ankorite Pins may be used with this tool. Pins are .054" diam. x  $\frac{1}{2}$ " long, and are packed 1 lb. per box.

No. 091




### STANDARD CARPET SPREADERS

These tools feature a stiff gauge rustproof stainless steel blade with a comfortable hardwood handle. Mainly used while carpet stretching to hook the carpet to the tackless strip. Blade is  $10\frac{1}{4}$ " wide, and is available both with and without notches — to suit your preference.

**No. 485** — with Notches

**No. 486** — without Notches




## TACKLESS STRIP CUTTERS

### No. 104

Has 2 replaceable blades that provide easy cutting from both the top and the bottom. The Handle locks in 3 positions: closed, half way for cutting  $9/32$ " strip, and full open for cutting thick strip. Economically priced. All steel parts are plated. The handle is vinyl cushioned, and can be locked in the closed position. A storage compartment in the handle holds 4 extra blades. Blades are wide enough to make diagonal cuts.

**No. 105-10**—Replacement Blades, 10 per Tube  
(Also fits Roberts No. 10-104)

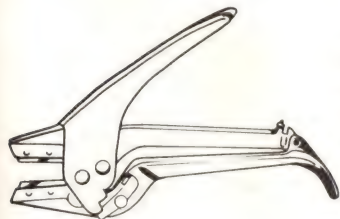

3350



### No. 908

This is a metal anvil type of shears, featuring a hand honed upper blade for quick and clean cutting. Wiss brand, famous for quality. Has powerful built-in leverage, and extra frame rigidity, for heavy duty cutting. Fully nickel plated to prevent rust. Handles are knurled for non-slip gripping. Anvil is long enough to cut strip on a  $45^\circ$  angle. Overall length is 8". Economically priced.



### No. 122T TACKLESS STRIP CUTTER

A 2-blade by-pass model that has amazing cutting power, and Teflon-S coated blades for non-stick easy cutting. The sharp slender blades are made from a special process heat treated steel that resists nicking from the pins. Has easy-to-see comfortable bright orange molded vinyl hand grips. Can be locked in the closed position. Length of cut is 2", overall length is  $8\frac{1}{2}$ ", and weighs only  $\frac{1}{2}$  lb.



### No. 725-CCC COOKIE CUTTER

A bargain priced repair tool for damaged or stained areas of sponge back carpet. Made from lightweight molded plastic. It uses a stationary pivot pin and a replaceable blade to cut a 3" diameter circle. Has a plastic cap to protect the pin and blade, and how-to-use instructions are stored in the cap. Great for professional use or over-the-counter sales to Do-it-Yourself customers.

**No. 726-RB**—Replacement Blades, 4 per Pkg.

## WISS METALMASTER® AVIATION SNIPS

Jaws are hot drop-forged from special molybdenum steel for wear resistance, and to withstand the severe strain of cutting curves. Cutting edges are serrated to prevent slip page. Designed to transmit extra power through the compound leverage. Recommended for cutting 18 gauge (.049") and lighter sheet metal. All models have non-slip vinyl grips for greater cutting comfort. Widely used by carpet installers and ceramic tilesetters.

See Page 53 for Tin Snips


Stock No.	Direction of Cut	Handle Color	Length of Cut
M-1R	Left*	Red	$1\frac{3}{8}$ "
M-2R	Right*	Green	$1\frac{3}{8}$ "
M-3R	Straight	Yellow	$1\frac{1}{2}$ "

\*These models also cut straight.



### No. 615 MAGNETIC NAIL HOLDER

An ideal tool for starting and driving nails into concrete, and in hard-to-reach places, without the danger of hurting your fingers. Also protects the flange on metal floor mouldings from damage. The magnet points the nail properly and automatically if it is picked up by the head. Made from stainless steel, the  $\frac{5}{8}$ " hexagon is just the right size and weight for convenient working. Tool is  $5\frac{1}{2}$ " long overall.

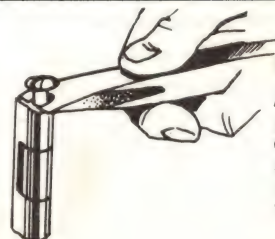

### No. 362 DOOR PIN TOOL

A newly designed tool that removes door pins faster, easier, and without causing damage. The forked end fits snugly around the head, and equal pressure can be applied to both sides. A really valuable asset to every tool box.



## HIGH GRADE TEMPERED STEEL CARPET NEEDLES

### No. 501½ CURVED ROUND POINT

Length	3"	3½"	4"	5"
Gauge	18	17	16	16

Packed 12 each per Package  
(12 Packages/Master Package)

### No. 515 STRAIGHT ROUND POINT

Length	2½"	2½"	3"
Gauge	18	17	16

Packed 25 each per Package  
(10 Packages/Master Package)

### No. 516 STRAIGHT TRIANGULAR POINT

Length	2½"	2½"
Gauge	18	17

Packed 25 each per Package  
(10 Packages/Master Package)




### No. 265 SEWING PALM

An essential tool for those tough sewing jobs. The dimpled iron thimble is securely anchored in the fine quality leather. Joints are riveted. Available in both No. 265-RH right hand style and No. 265-LH left hand style. If it is not specified, right hand style will be shipped.

### THIMBLES FOR CARPET INSTALLERS

Used for hand sewing work. To accommodate individual preferences, they are available in both the Open End and the Closed End styles.



Open End

Closed End

No. 510-00 - Open End - .800" or 51/64" I.D. at Large End  
No. 510-0 - Open End - .780" or 25/32" I.D. at Large End  
No. 510-1 - Open End - .750" or 3/4" I.D. at Large End  
No. 510-2 - Open End - .720" or 23/32" I.D. at Large End

No. 511-00 - Closed End - .800" or 51/64" I.D. at Large End  
No. 511-0 - Closed End - .780" or 25/32" I.D. at Large End  
No. 511-1 - Closed End - .750" or 3/4" I.D. at Large End



Spool measures  
2½" in diameter  
x 3½" high . . .  
easily fits in  
a tool box.


### HAND SEWING CARPET THREAD

A top quality heavy duty thread, that is heavily waxed for easy working. A very strong synthetic material that won't stretch—even in the hot summer months! Made in the popular No. 18 Gauge size. Comes on 4 oz. plastic spools in 2 colors.

No. 111 - Natural Beige

No. 113 - Olive Drab

### No. PHR PORCUPINE HALF ROLLER

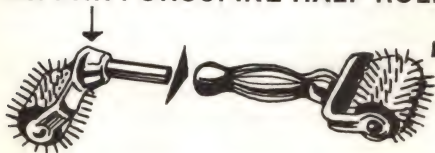

### No. PR-2 PORCUPINE ROLLER

An ideal tool for preparing the carpet backing prior to seaming—by either the hot melt or latex cement method. The long tapered points pierce through the nap and the back—allowing the adhesive to penetrate for greater seam strength. Here is a tool that REALLY pays off in more attractive work and fewer callbacks! Save time, and wrist fatigue, by adding a Half Roller. It slips into a hole in the handle of the regular roller, and is held securely in place with a set screw.

### CARPET AWLS



An ideal tool for scribing, picking seams, and other carpet work. Has plastic handle and tapered blade. Choice of 4 sizes.

No. 4-1—Blade Length 2½"  
No. 4-2—Blade Length 3½"  
No. 4-3—Blade Length 4½"  
No. 4-4—Blade Length 5½"

### No. 137 TURNING TOOL



A very handy tool having the tip of the shaft bent to a 30° angle for tucking carpet into the gully. The tempered steel shaft is molded lock tight into the high impact plastic handle. 7" Long overall.



### No. 133 TACK BAG

A convenient tack container made from closely woven durable canvas. Size is 6¼" wide x 11½" high.

### No. 69-007 STANLEY SCRATCH AWL

Features flat handle sides to prevent twisting in the hand. Blade, shank, and head are a one piece forging from the finest steel. Tapered blade is ¼" diameter x 3-3/8" long, and is 6½" long overall.



### No. 123-1/2 CLAW TOOL



Boss type claw tool. Forged blade has a ½" diameter. Shank is set in amber plastic handle. 8" Long, and weighs 7 oz.

### No. 57-ML MOULDING LIFTER



Remove moulding without damage with this extremely popular tool. See further description on page 11 of this catalog.

### No. A-3 TUF-SETTER AWL COMBINATION TOOL



All carpet mechanics should have this tool. As a tuft setter it holds and inserts carpet tufts where damaged. As an awl, it butts carpet back together on seam tape. Can also be used for scribing, marking, or temporarily securing carpet to the floor during installation. Supplied with the No. 2 Regular Point.

### No. 3K-7A TUF-SETTER KIT

A compact kit, with all the tools needed to repair carpet damage from cigarette burns, moths, etc., and for rebuilding ragged seams that are impossible to recut. Components include Plastic Outer Case, Q-Tip Container, Pint Can Dispenser Spout, Giant Tweezers, Tuf-Setter Handle, Tuf-Setter Awl Point, and #143¾ Tufting Shears. All of these tools are always ready to let you do a better and a faster job!



### No. G56P Cutting Nippers

Very useful for removing nails or brads from quarter round and other woodwork. The 1" wide rounded nose permits prying action without damaging these surfaces. Also used for cutting nails, wire, etc. Compact 6" size, and weighs only 8 oz. Made of drop forged steel, with solid polished jaws and plastic coated handles.









### No. 843 CARPET GRABBER

**Makes Carpet Pulling Painless!**

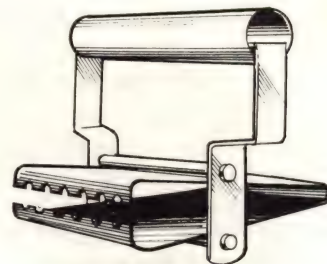

A great little tool that makes a tough job much easier! Can be used on carpet and sheet goods. Used for pulling old goods off the floor or new goods from the roll. Provides tremendous leverage. No more aching wrists and fingers! The 5½" wide tubular handle permits 2-hand use in extra tough situations. If desired, a steel rod can be inserted through the handle for even greater leverage. Designed to grab tighter the harder you pull! Fits in a tool box, and weighs only 2¼ lbs. Economically priced. Don't deny yourself the comfort this tool offers — get yours today.

**NEW**

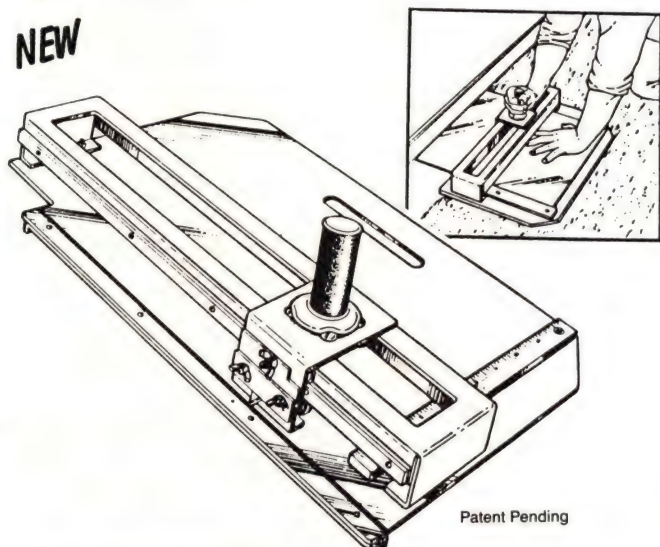


### No. 816 18" CARPET TILE CUTTER

Designed by an installer to give the fastest and most accurate method of trimming carpet tile. Tests have proved savings of up to 65% with this simple tool. Also, it will trim tile to walls that are up to 5" out of square in 18" of length. To use, simply position the bottom gauge bar at the edge of the last full field tile, place the tile to be cut upside down in the cutter, and cut with the easy grip ball bearing guided handle. Uses heavy duty utility knife blades. Made of sturdy lightweight aluminum, it weighs only 11 lbs., and has a slotted handle for easy carrying. Measures 23" x 14" x 8" high.

Patent Pending

### No. R-11 STAPLE HAMMER

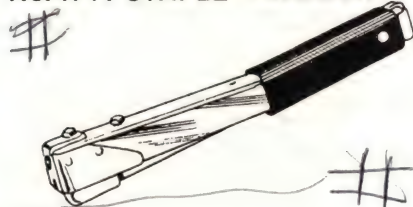


This tool is well balanced, and was designed primarily for carpet pad stapling. It has a comfortable vinyl hand grip, and is sturdily constructed from tough Swedish steel. It has a 150 staple capacity, and is easily loaded at the rear. There are only four moving parts, and replacement parts are available. Weighs only 2 lbs.

**Staples for No. R-11 Hammer.** Also for Roberts 10-109, Taylor 707 and 709, Senco A-11, Arrow HT-50 and T-50, Crain 130, and others.

**No. A11-C—**¾" Leg, Chisel Point, 5000/box



**No. A11-D—**¾" Leg, Divergent Point, 5000/box

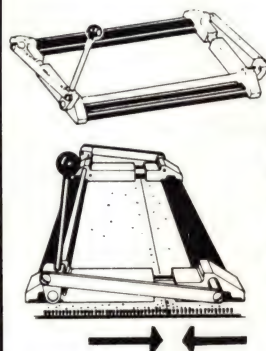

### No. KT-400 SEAM REPAIR STRETCHER

Makes closing of open seams quick and easy! Set in position and pull handle down. 34 steel pins pull the carpet from both directions. Seam can then be cemented or top sewn. Sturdily constructed from extruded aluminum and stainless steel. Overall size is 10" wide x 22" long. Saves time — will pay for itself! Weighs 9 lbs.


**NEW**

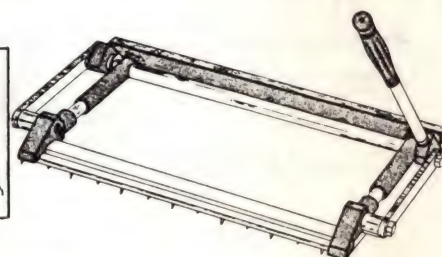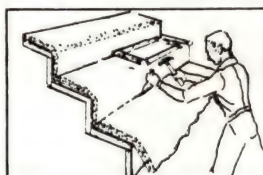

### No. 5070 STAIRWAY STRETCHER

Gives a tighter and more uniform installation—with less effort and without sore knees. Designed for waterfall type installations, stretching is done from the top of a stairway down. Stairs are easier to install because gravity is working with you—not against you. To use, stretch runner, then use a stair tool to set carpet into crotch of step below. (See illustration.) For wide stairs, reposition and repeat procedure. Powerful 12 to 1 leverage makes stretching easy. Supplied with carrying case. Weighs 14½ lbs.

### No. R-1 EDGE BINDING STAPLER

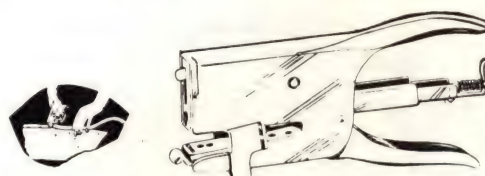

A plier style stapler ideal for edge binding carpets or rugs. It has a 2¼" throat depth that is 3/8" high. Has an adjustable throat depth gauge, for accurate staple placement, that can be completely removed if desired. Plated for rust prevention, and magazine capacity is 160 staples. Also good for tagging samples.

**Staples for No. R-1.** Also for Roberts 10-113, Taylor 708, Crain 147, and others.

**No. 248—**5/16" Leg, 5000/box



## BOSTITCH STAPLING HAMMERS

No. H2B—For  $\frac{3}{8}$ " Staples—used by carpet installers.



No. H2B-1/2—For  $\frac{1}{2}$ " Staples **only**—used by ceramic tile setters.

With one hand, and one blow, this expertly designed tool places and drives a staple all the way home—as fast as you can swing your wrist. The compounded accelerated action delivers a powerful force with only a short wrist motion. Plated for rust protection, and is equipped with a slip resistant vinyl grip.

**Genuine Bostitch Brand Staples**—Both are .050" x .019" wire with chisel point. 5000/box.

No. SHCR-5019-3/8— $\frac{3}{8}$ " Leg (for use in H2B)

No. SH-5019-1/2— $\frac{1}{2}$ " Leg (for use in H2B-1/2)

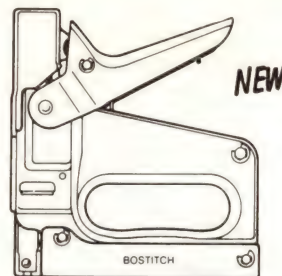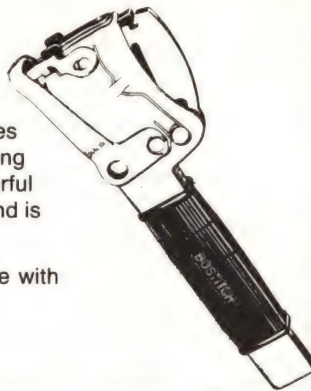

## No. T5-8D4 BOSTITCH PROFESSIONAL TACKER

Top of the line professional quality tacker for years of dependable use. Features convenient front loading. Powerful direct drive never needs lubricating. Built-in shock absorber cushions recoil. Drives  $\frac{1}{4}$ ",  $\frac{3}{8}$ ",  $\frac{1}{2}$ ", and  $\frac{9}{16}$ " staples shown to the left.



## No. 60/9 STAPLES

For the popular P6 Bostitch Stapler. Have  $\frac{3}{8}$ " long legs. Similar to STH-2619-3/8". 5000/box.



Chisel Point

## IMPORTED BRANDS OF STAPLES

For Carpet Installers and Ceramic Tile Setters



Divergent Point

Made from high quality wire. "C" in the stock number designates chisel point, and "D" designates divergent point. All stock numbers are substitutes for the domestic stock numbers that are used. **Country of Origin may vary and is NOT guaranteed.** 5000/box.

### FOR DUO-FAST ELECTRIC EN-5418:

I-5418-C-9/16 I-5418-D-9/16

### FOR DUO-FAST HAMMER TACKER HT-755:

I-7512-C-3/8 I-7516-C-1/2 I-7518-C-9/16

I-7512-D-3/8 I-7516-D-1/2 I-7518-D-9/16

### FOR DUO-FAST HAMMER TACKER HT-550:

I-5010-C-5/16 I-5010-D-5/16

### FOR BOSTITCH HAMMER TACKER H2B:

I-SHCR-5019-3/8

### FOR BOSTITCH HAMMER TACKER H2B-1/2:

I-SH-5019-1/2


### FOR BOSTITCH TACKER T5-8D4:

I-STCR-5019-1/4 I-STCR-5019-1/2

I-STCR-5019-3/8 I-STCR-5019-9/16

### FOR ARROW T50 TACKER, HT-50A HAMMER TACKER, AND HT-50M HAMMER TACKER:

I-T50-3/8-C I-T50-3/8-D I-T50-1/2-C



## IMPORTED SPOTNAILER STAPLES

Very popular. Divergent — Chisel Point. Best for hardboard underlayment. High carbon, resin coated. All sizes 5000/box.

### Stock No.

I-77-DCX-7/8

I-88-DCX-1

I-99-DCX-1-1/8

### Similar To

(3807-DCX-7/8)

(3808-DCX-1)

(3809-DCX-1-1/8)

### Length

7/8"

1"

1-1/8"



## No. R-3 STAPLE REMOVER

Has a comfortable plastic handle and features a hinged blade for varying penetration angles. Has powerful leverage for easy work, and is 8" long overall. Weighs 5 oz.



## No. G7B STAPLE REMOVER

Has a smooth cast aluminum handle. The staple removing blade is hardened and tempered tool steel, that won't bend or break. Front of the blade is bevelled for easy entry.

No. G7B-RB—Repl. Blade

**Clauss and WISS**

## CARPET and RUG SHEARS

Both of these U.S.A. manufacturers make high quality Shears only. From years of experience we can recommend both brands equally well.

### LIGHT DUTY—Raised Blade Pattern



Stock No.		Full Length	Length of Cut
28	Wiss	8"	3 $\frac{3}{4}$ "
20-W	Wiss	10"	5"
20-LH	Wiss Left Hand	10"	5"
22-W	Wiss	12"	6"
1225	Wiss*	10"	5"
1226	Wiss*	12"	6 $\frac{1}{4}$ "
3310	Clauss	10"	4 $\frac{3}{4}$ "
3312	Clauss	12"	6"

\*These models are "Knife Edge" Shears. They cut faster and easier because the cutting edges have a slimmer bevel — compared to regular shears. However, they require sharpening more often. For sharpening, use the No. JP14 Stone (shown on Page 6).

### MEDIUM DUTY CARPET SHEARS — Straight Blade Pattern



No. 4B Clauss 12" long, 6-1/4" length of cut

### RUG SHEARS—Thin Offset Blades Lie Flush



No. RS-1 Wiss 7-1/8" long, 3-1/2" length of cut

No. 468RS Clauss\* 8" long, 2-7/8" length of cut

### RUG TRIMMERS — Blades Curved to the Right



No. 1328-KBR Clauss 8" long, 3-7/8" length of cut



### DUCKBILL NAPPING SHEARS MADE IN WEST GERMANY





No. 166 6" long, 1-1/2" length of cut  
Full 1" of knuckle room.





### No. MM12 MEASURING WHEEL

Get your estimating measurements quickly and sufficiently accurately with this convenient stand-up measuring tool. The counter records feet and inches up to 1,000 ft. without resetting. It subtracts, as well as adds. When finished measuring, simply press the reset button for a zero reading. The magnifying glass over the counter face enables the operator to easily read the figures. Has nylon wheel bearings that never need lubrication. Telescoping handle closes to 21" for easy storage and carrying. Economically priced. Weighs less than 2 lbs.

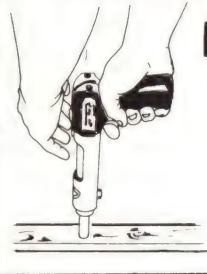

**NEW**

## POWDER ACTUATED NAIL DRIVING TOOLS

**For Speedy Fastening of Tackless Strip and Metal Mouldings to Concrete, Terrazzo, and ALL Other Masonry Surfaces—Without Drilling Holes!!**

These tools are the answer to troublesome slabs and conditions where other fastening methods either fail or are less desirable. The hardened steel nails are driven by a low velocity powder load—saving much time and effort! Once the correct load (for the slab condition) is determined, you get secure holding power with every shot. All four strengths of loads should be purchased initially, so you'll always have the proper one for the job at hand. Illustrated instructions, included with each tool, explain how to make proper load selection.



**No. XL-99**—Hammer actuated tool gives professional results. Economically priced.

**No. XL-101C**—Trigger actuated tool. Comes complete with double wall plastic case, including safety goggles, ear plugs, spall guard, and barrel cleaning accessories.

**CAUTION**—always wear safety goggles while using these tools to protect against eye injury from flying particles of concrete. The same applies to other persons in the vicinity. Safety Goggles are shown below.



### LOAD AND NAILS FOR POWDER ACTUATED NAIL DRIVING TOOLS

 <b>22 CALIBER</b> Type A Crimp loads for powder actuated tools. <b>LOADS</b> (100/box)		Load			Color Code	
		Stock Number	Level Number	Load Strength	Case Body	Head
		<b>22C1</b>	1	light	brass	gray
		<b>22C2</b>	2	medium	brass	brown
		<b>22C3</b>	3	heavy	brass	green
		<b>22C4</b>	4	extra heavy	brass	yellow
<b>NAILS</b> (100/box) 	<b>D-50</b>	—1½" long (for metal trims)				
	<b>D-75</b>	—¾" long (for tackless strip)				
	<b>D-100</b>	—1" long (for tackless strip)				
	<b>D-150</b>	—1½" long (for furring strips and 2 x 4's)				
	<b>D-250</b>	—2½" long				

### No. 251 SAFETY GOGGLES



For personal safety and protection, it is absolutely imperative that all mechanics wear goggles when doing work that exposes them to even the slightest possibility of eye injury! This brand features a clear frame for front and side vision, with a heavy duty lens. The flexible strap is adjustable. Meets the OSHA Standard in all ways.

### BLUED CARPET LAYING TACKS

Widely used for extra tackless strip nailing, for "stay" work, and for permanent carpet fastening on wood sub-floors where other methods are not practical or desirable. All sizes available in 1 lb. packages only.



**No. CLT-12**  
Length  
1 1/16"  
Pieces per lb.  
736




**No. CLT-18**  
Length  
7/8"  
Pieces per lb.  
640



**No. CLT-24**  
Length  
1-1/8"  
Pieces per lb.  
480

### UNIVERSAL WOOD DRIVE NAILS




For fastening all types of flat carpet bar and other metal mouldings. Available in both Gold and Silver finishes, in the countersunk head style. These new nails overcome the problem of smaller and larger holes provided by various moulding manufacturers. The shank is #4 screw size, which fits all hole sizes. The 1/4" head diameter satisfactorily fills the countersunk portion of both smaller and larger holes. Length is 1 1/4". Buy these Nails and eliminate the need for stocking two sizes!

**No. DNG-1** —Gold, 1 lb. Box  
**No. DNG-50**—Gold, 50 lb. Bulk Ctn.

**No. DNS-1** —Silver, 1 lb. Box  
**No. DNS-50**—Silver, 50 lb. Bulk Ctn.



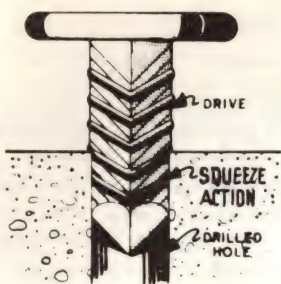








# ALUMINUM DRIVES

**FAST — EASY — ECONOMICAL — PRACTICAL**


Specially designed and made for securing all types of metal trim and wood tackless. Works equally well in cement, terrazzo, marble, slate or any masonry floor. The 4 corners of this Square Drive contact the wall of the undersize round hole with tremendous force—generating several times more holding power than is necessary for secure fastening. Available in 6 popular sizes in the conventional 1 lb. jars or economical 25 lb. bulk cartons.

 <p><b>No. 58</b> 5/8" x 1/8" LONG FLAT HEAD  REQUIRES: 1/8" x 3/4" HOLE</p>	 <p><b>No. 78</b> 7/8" x 1/8" LONG FLAT HEAD  REQUIRES: 1/8" x 1" HOLE</p>	 <p><b>No. 78-3</b> 7/8" x 3/16" LONG FLAT HEAD HEAVY DUTY  REQUIRES: 3/16" x 1" HOLE</p>	 <p><b>No. 078</b> 7/8" x 1/8" LONG OVAL HEAD FOR COUNTERSUNK HOLES  REQUIRES: 1/8" x 7/8" HOLE</p>	 <p><b>No. 118</b> 1-1/8" x 1/8" LONG FLAT HEAD  REQUIRES: 1/8" x 1-1/4" HOLE</p>	 <p><b>No. 118-3</b> 1-1/8" x 3/16" LONG FLAT HEAD HEAVY DUTY  REQUIRES: 3/16" x 1-1/4" HOLE</p>
---	---	--	--	--	---

## SOLID CARBIDE MASONRY BITS FOR ALUMINUM DRIVES



**No. 8 BIT**—Drills exact hole size for 1/8" Aluminum Drives shown above. Pointed on both ends.



**No. 10 BIT**—Drills exact hole size for 3/16" Aluminum Drives shown above. Both ends pointed.

## ELECTRIC DRILL ADAPTORS FOR SOLID CARBIDE DRILL BITS

Heat treated for wear resistance, 1/4" shank, and rust-proof plated.



**No. 18 ADAPTOR**  
—for No. 8 Bit



**No. 18-3 ADAPTOR**  
—for No. 10 Bit

**CAUTION:** Occasionally some extremely hard aggregates can cause excessive breakage of Solid Carbide Bits. This does not mean that these Bits are defective. Drilling in such aggregates should be done with Carbide Tipped Masonry Drills (See Below)



## No. CS-18 1/8" CARPET STUBBY DRILLS

Engineered specially for the carpet trade. Carbide tipped for smoother drilling and longer life. 1-5/8" long with a 1" shank. Make consistently accurate holes for secure fastening of tackless in concrete and terrazzo. This short length is preferred by many installers, since there is less breakage.



## CARBIDE TIPPED MASONRY DRILLS

For BOTH Rotary AND Hammer drilling. Fast cutting! Special flute design rapidly removes dust to avoid overheating and breakage. For use on concrete, tile, brick, stone, marble, etc.

**JRP Series — Premium Industrial Grade — Nickel Plated**  
**MP Series — Economy Industrial Grade — Black Finish**

Stock No.	Bit Diam.	Shank Diam.	Overall Length
JRP-1	1/8"	1/8"	3"
JRP-4	3/16"	3/16"	3-1/2"
JRP-9	1/4"	1/4"	4-1/4"
JRP-19	5/16"	1/4"	4-3/4"
JRP-31	3/8"	1/4"	6"
JRP-46	1/2"	3/8"	6-3/4"
JRP-47	1/2"	1/4"	6-3/4"
MP-1	1/8"	1/8"	3"
MP-4	3/16"	3/16"	4"
MP-9	1/4"	1/4"	4"

## CONCRETE NAILS



**No. CN-1/2-5** 1/2" Length 5 lb. box  
**No. CN-1/2-50** 1/2" Length 50 lb. bulk carton



**No. CN-5/8-5** 5/8" Length 5 lb. box  
**No. CN-5/8-50** 5/8" Length 50 lb. bulk carton



**No. CN-11/16-5** 11/16" Length 5 lb. box  
**No. CN-11/16-50** 11/16" Length 50 lb. bulk carton



**No. CN-3/4-5** 3/4" Length 5 lb. box  
**No. CN-3/4-50** 3/4" Length 50 lb. bulk carton



**No. CN-1-5** 1" Length 5 lb. box  
**No. CN-1-50** 1" Length 50 lb. bulk carton

These tough and hardened nails resist bending. They are used extensively by carpet installers where the condition of the aggregate permits. They have the popular "countersunk" head style. The 1/2", 5/8", 3/4" and 1" sizes are the No. 10 Gauge (.135" shank diameter), and have a 17/64" head diameter. The 11/16" size, which is ordinarily used in pre-nailed tackless strip, is the standard No. 12 Gauge (.105" shank diameter), and has a 7/32" head diameter. All sizes are available in the convenient 5 lb. box, and the economical 50 lb. bulk carton, package sizes.

**ALWAYS WEAR SAFETY GOGGLES WHILE USING CONCRETE NAILS.**


## No. 118-LN-50

## BLUED LATH NAILS



Widely used for tack strip nailing around door jambs, and for other cut-off lengths. These nails are the 3D size (No. 15 Ga.) x standard 1 1/8" long, with 11/64" diameter head. Available in 50 lb. bulk carton at a very attractive price.



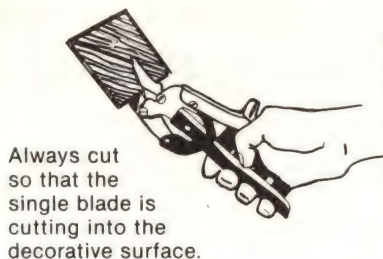

### No. 11-LS REGULAR PLASTIC LAMINATE SHEARS


Cuts all types and brands of high pressure decorative plastic laminate material. Patented, "double action", hardened steel cutting blades cut without binding, and will not crack or chip the decorative surface!

- Widely used by professional and "do-it-yourself" mechanics for "rough" cutting the laminate sheet before cementing into place.
- Another valuable use is to cut the irregular contour line for the piece of laminate that fits in between the wall the the top of the backplash!

Every mechanic working with Plastic Laminates should have one of these fine Tools!

### No. 12-LS UNIVERSAL PLASTIC LAMINATE SHEARS Cuts on a Curve (Right or Left), on Any Angle, or Straight


- Cuts without splitting or crazing the decorative surface.
- Cutting line always stays in full view while cutting.
- Cuts fast, and the blade does not bind in the material.
- Powerful compounded leverage permits strain free cutting.
- Spring opens the handles immediately for the next stroke.
- Safety clip holds handles in closed position when not in use.
- Has plastic handle grips for comfortable operation.
- Quality materials used throughout for lengthy trouble-free service.
- Weighs only 1 pound, and is a compact 5" x 7 1/2" overall.



### No. 10-LS OLD STYLE PLASTIC LAMINATE SHEARS



Cuts clean unchipped edges as the No. 11-LS Shears above, but the handles are held under the sheet when in use, rather than over. This permits cutting across a piece of coved laminate.

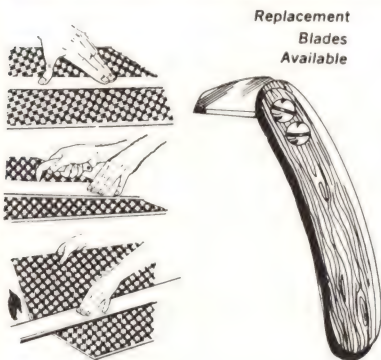

### No. 344 PLASTIC LAMINATE SCORING CUTTER

#### Featuring A Double Edged Blade

A very popular, inexpensive, and easy to use tool. The carbide tipped blade simply scores through the decorative surface, and the laminate breaks cleanly away. Ideal for both do-it-yourself and professional mechanics. Excellent for cutting self edging strips. Double edged blades are more economical.

#### No. 344-B—Replacement Blade


#### Anyone can follow these simple instructions:

1. Hold a straight edge firmly on the decorative surface of the laminate sheet, along the line to be cut.
2. Draw the No. 344 Cutter firmly along the straight edge, scoring completely through the decorative face. The deeper the scoring, the easier it is to break the sheet neatly. This is especially important when making long or narrow cuts.
3. To break the laminate sheet, simply press down firmly on the straight edge (along the scored line), and grasp the outer edge of the sheet, and pull upwards.




### No. SKB-2 SCORING BLADE

For all popular brands of Utility Knives, and used to score (and then break) plastic laminate, asbestos products, asphalt and vinyl asbestos floor tiles, and other brittle types of material. Quicker and more efficient than sawing. Can also be used for curves. Packed 2 blades per card, 10 cards per box.




### No. M-300 LAMINATE STRIPPER

Cuts plastic laminate cleanly flush to an edge. A hand tool that does the work of an expensive router! Cuts 2-3/8" long with each stroke, and 2 compression springs reopen the handles. Precision ground pins and bushings provide permanent cutting blade alignment.

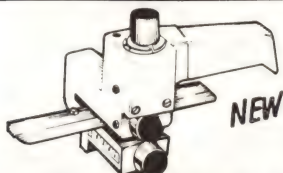


**No. T-78**—Has a 1/2" to 3/4" strip width capacity. For hand held use. Also for bench mounted use with No. TK-78 Stand shown below. Capacity of bench clamp is 1 1/8".



## VIRUTEX PLASTIC LAMINATE SLITTERS

These popular hand operated tools quickly and accurately cut plastic laminate strips! Cuts material up to .080" thick. Cutting is done by scoring the material between two opposing circular blades mounted on roller bearings. Blades are adjustable for different sheet thicknesses by a knob on the top of the tool. For the desired strip width, the gauge is simply adjusted and locked for making identical strips. Blades should be set to just lightly score. After lightly scoring, the laminate is broken downwards for a perfectly clean cut.

#### No. 15.27.75—Replacement Blades, 2 per Set

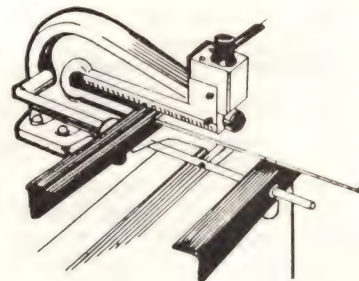

**No. AH-97**—Has a 1/2" to 8" strip width capacity. For bench mounted use only.



### FLAT MAGICUT

Both have unique tooth design for non-clogging, fast cutting, and a relatively smooth finish. Multi Cut models have one smooth "safe edge".

No. 07917—10" \*  
No. 07941—12" \*  
No. 07965—14" \*

### MULTI CUT

No. MC-10—10" \* \*  
No. MC-12—12" \* \*  
No. MC-14—14" \* \*

**MILL BASTARD**—A popular lower cost file for extra smooth finishing work.

No. 08354—6" \* No. 08642—10" \*  
No. 08497—8" \* No. 08737—12" \*  
No. 08832—14" \*

**LAMINATE/MILL**—For extra smooth finishing, with less clogging, because of special tooth formation.

No. LM-10—10" \* \* No. LM-12—12" \* \*  
No. LM-14—14" \* \*

**HALF ROUND BASTARD** — For fast cutting on concave, convex, and flat surfaces.

No. 05094—12" \* No. 05194—14" \*

### HANDY FILES

Combination files, with handle. One side for fine finishing, and a "double cut" on other side for rapid stock removal. Has one "safe edge" for corner work.

No. 06601—8" \* No. HF-8—8" \* \*  
No. HF-10—10" \* \*

### FILE HANDLES WITH METAL FERRULES

No. 21494—for 8" and 10" Files  
No. 21485—for 10" and 12" Files  
No. 21476—for 12" and 14" Files

### No. 21467 FILE BRUSH W/CARD

Has wire card clothing for coarse teeth, and white tampico fibre for fine teeth. 10" long overall.

\* Files made by Nicholson, a pioneer U.S.A. producer with over a hundred years of experience in producing excellent quality files.

\* \* Top quality industrial grade files made in Western Europe.

**NEW**

## BOSCH PLASTIC LAMINATE TRIMMERS

### No. 1609K LAMINATE INSTALLERS KIT


This versatile kit enables the user to handle almost any plastic laminate trimming situation. It includes a powerful, high speed motor with a Standard Router Base, Laminate Trim Guide, Offset Base, Tilt Base, wrenches, and a steel carrying case. Motor housing is 2 3/4" diameter for easy gripping and control. Lightweight unit weighs only 3 1/2 lbs. 30,000 rpm (no load) motor operates on 115 VAC, and is double insulated and U.L. Listed for safety. Basic kit components are available separately. More information and Stock Nos. are shown to the right.

**No. 1608 TRIM ROUTER**—Powerful motor with the Standard Router Base for use with piloted, or ball bearing, bits. Adjustable height base has full 360° positioning for comfort and convenience. Includes 2 wrenches.

**No. 611 LAMINATE TRIM GUIDE**—Attaches to the underside of the Standard Router Base to provide a trim guide when using bits without piloted guides.

**No. 612 OFFSET BASE**—For trimming back splashes, scribing to walls, and trimming inside corners of back splashes. Toothed belt and pulley are easily attached/removed.

**No. 613 TILT BASE**—For trimming to corners and odd angle cuts. Tilts 30° in one direction and 45° in the other direction. Locks securely at 0° and 45°.

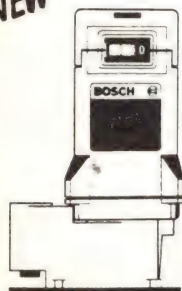

Offset Base mounted on Motor



Standard Router Base with Laminate Trim Guide attached




Tilt Base

## BOSCH ROUTER BITS

### No. 85285 SOLID CARBIDE FLUSH TRIMMER

Makes a square trim edge cut. Has an integral pilot. Cutting edge is 1/4", shank diameter is 1/4" and overall length is 1 1/8".



### No. 85286 SOLID CARBIDE BEVEL TRIMMER

Makes a 7 1/2° bevelled trim edge cut. The built-in pilot eliminates a guide assembly. Cutting edge is 1/4", shank diameter is 1/4", and overall length is 1 1/8".




### No. 85288 SOLID CARBIDE COMBINATION FLUSH AND BEVEL TRIMMER

Used for 10° bevel or flush square trim edge cuts. Used with router guide assembly. Both cutting edges are 3/16", shank diameter is 1/4", and overall length is 1 5/8".




### 2-FLUTE ECONOMY CARBIDE TIPPED LAMINATE TRIM BITS



No. 85430—Flush Trim Bit  
No. 85431—10° Bevel Trim Bit  
Designed for fast and accurate trim cuts. Features a dust shielded steel ball bearing pilot. Shank diameter is 1/4", and Cutter diameter is 5/8". Overall length is 1 15/16".  
No. 3-600—Repl. Ball Bearing

### No. 85217 CARBIDE TIPPED OVERHANG CUT-OFF BIT

For rough sizing of laminate piece prior to gluing, without scribing or sawing. Leaves 3/16" overhang. Ideal for tops with irregular shapes. Has 1/4" shank diameter, 1/2" flute length, 3/8" width of cut, and the steel ball bearing pilot is 3/4" diameter.

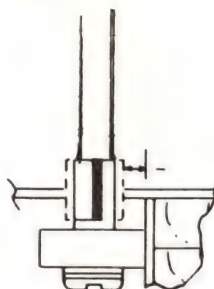

### No. 85244 COMBINATION PILOT PANEL BIT

With a Drill Point for Plunge Through Cutting.

Used to cut excess material away from a top, regardless of overhang size, since the pilot bears against the self edge. Great for sink cut-out work because of the plunge through drill point feature. Wall panel installers use for window and door cut-outs. Pilot and shank are 1/4" diam. The single flute carbide tipped cutting edge is 3/4" long, and overall length is 2 5/8".








## ROLLERS FOR PLASTIC LAMINATE

### "J" ROLLERS

Specially designed for plastic laminate. Gives 20-25 PSI for positive bonding. The 1½" diam. x 3" wide rubber roller has no axle projection on one end, for scratchless flush work. The 14" long handle is sturdy lightweight aluminum alloy, and has 2 soft vinyl hand grips. Available in black and white roller colors—both are non-marking. Economically priced.


No. J200B—Black "J" Roller

No. J200W—White "J" Roller

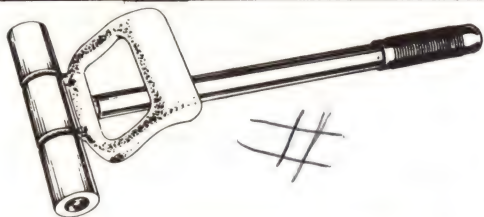

### No. 333-AR EXTENSION HANDLE ROLLER

A sturdy versatile roller for counter tops, walls, and now for resilient floor work too. There are no axle projections, allowing flush work into corners without scratching adjoining surfaces. It is 17" long in the closed position, and can be extended to 27". The clever locking device permits fast length adjustments by a simple twist and re-twist action. The hard rubber roller sections exert uniform pressure. Roller sections are 1½" diam., and the overall width of 3 is 7¼". Weight is 2½ lbs.

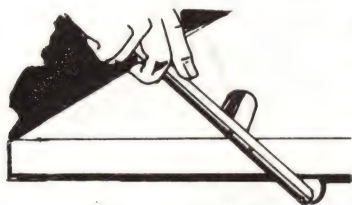

### No. S202 SQUEEZE ROLLER


Eliminate costly bonding problems in the critical edge areas on plastic laminate counter-tops with this roller. Does away with clamping and pounding. It delivers, with ease, all the pressure needed for permanent adhesion. The 1¼" polypropylene rollers will not mar the laminate. The bottom roller is 1½" wide, and the top roller is 1⅞" wide. 12" long and weighs ½ lb.



### No. 222-AR HAND ROLLER

For various kinds of wall and counter-top materials. Also good for stair tread work. By reversing the roller, the specially shaped cast aluminum handle is ideal for coving work and corner fitting. Has no axle projections, and rollers are the same as those on the No. 333-AR. Weighs 1½ lbs., and is 5" long.

NEW

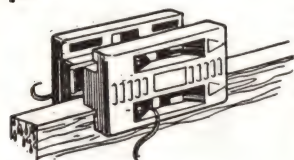

### No. AU-93 EDGEBANDING TRIMMER


A real time saving tool, this trimmer simultaneously trims both edges of flexible edgebanding such as wood veneer, polyester, and PVC materials. Has a ⅝" to 1¾" capacity with duplicate adjustable blades on both sides to trim flush, on a 45° bevel, or a combination of both. To use, place the trimmer onto the edge of the panel, squeeze the tool, and slide along the panel edge for a clean trim.

No. AU-93-RB—Repl. Blades, 6 per Set



**No. 688 MICA-NIFE PLASTIC LAMINATE EDGER**—Designed specifically for finishing plastic laminate self edges. It eliminates the need for finish filing, and is fast and easy to use. Ideal for both the professional and the "do-it-yourself" installer. The scarfing blade can be set to any desired angle. Blade is solid carbide for long life. The blade holder body is made from unbreakable molded nylon.

No. 688-RB—Repl. Carbide Blade

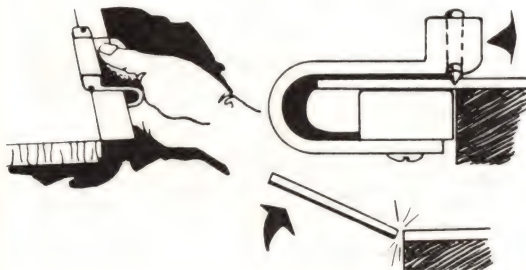

### No. PLT PLASTIC LAMINATE TRIMMER

The Plastic Laminate Trimmer scores the decorative surface of the laminate along the edge of the countertop. Then, the waste is simply broken up and off, leaving an unchipped edge ready for finish filing. Designed so that too much laminate can never be removed, this tool cuts all the way into inside corners. Plastic butt plate will not mar the laminate surface on self edging work. Scoring needles are carbide tipped for long life. Instructions supplied.

No. PLT-N—Replacement Needles, 2 per Pkg.

### CONTACT CEMENT ROLLER FRAMES & COVERS

For spreading contact cement for plastic laminate installation work. Just the right amount of adhesive is spread by the nap of these covers. The nylon fabric provides long life. The core is impregnated with a phenolic resin to resist deterioration from cements and solvents. Frames are sturdy enough to resist bending from normal application pressure. All metal parts are plated. Covers should always be removed while still wet.

No. 3-F—Roller Frame for 3" Cover No. 33-C—3" Wide Roller Cover  
No. 7-F—Roller Frame for 7" Cover No. 77-C—7" Wide Roller Cover  
No. 9-F—Roller Frame for 9" Cover No. 99-C—9" Wide Roller Cover  
No. 9564—72" Threaded Handle for above Frames

NEW No. 777-TA—7" Wide "Throwaway" Roller cover, 2 per Pkg.

### BRUSHES for CONTACT CEMENT




Economical "throwaway" brushes for applying contact cement to tackless strip, metal trims, countertops, etc. These are 100% pure white bristles with a flat trim and a plain sanded wood handle.


No. 1412-1—1" wide No. 1412-3—3" wide  
No. 1412-2—2" wide No. 1412-4—4" wide



## PRECISION MITRE BOXES . . . For Metal and Wood Mouldings

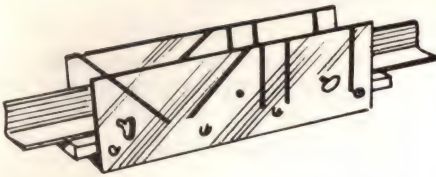

**No. 201 "AIRWAY" ALL-STEEL MITRE BOX**—Has precision located slots for accurate 45° and 90° cuts, and case hardened sidewalls maintain this accuracy. The soft base prevents blade dulling. Has 3 threaded holes in one sidewall to lock moulding in place with thumb screws. One sidewall is flush with the bottom of the base, and the other is 1/2" deeper so box can be mounted flush against the front edge of a workbench. Two countersunk mounting holes are provided in the base, and can be mounted on a board for on-the-job use. Overall dimensions are 11" long x 2 3/8" wide x 2 1/2" high, and weighs 5 1/2 lbs.

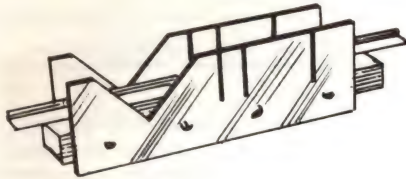

**No. 301 "AIRWAY" SEMI-STEEL MITRE BOX**—Economy model of the No. 201 Box. The sidewalls are likewise case hardened for long accurate life, and the slots are located with the same precision. The base, however, is hardwood instead of steel, and no clamping device is supplied. Other design features and dimensions are similar. Weighs 3 1/4 lbs.

## HACKSAW FRAMES AND BLADES



**No. 9-HSF NICHOLSON**—A sturdy medium priced frame with a 2 5/8" throat depth. Steel parts are corrosion proof nickel plated. Molded plastic handle is open pistol grip design. Uses 10" or 12" blades. Weighs 1 lb. and is furnished with a 10" blade.



**No. 10-HSF NICHOLSON**—A much stronger model with a 3 3/8" throat depth and a steel reinforced plastic handle. Steel parts are corrosion proof nickel plated. Uses 10" or 12" blades. Weighs 2 lbs. and is furnished with a 10" blade.



**The Shatterproof Blade**—Good quality and economically priced. Recommended for cutting thin stock.

**No. SS-1218** . . . . 18 Teeth with Raker Set  
**No. SS-1224** . . . . 24 Teeth with Wavy Set  
**No. SS-1232** . . . . 32 Teeth with Wavy Set

Both types are 12" long x 1/2" wide, and feature the safety flexible back. Packed 10 per Pkg.

**The Bi-Metaloy® Blade**—For true cutting and substantially longer life. Means much lower cost per cut!


**No. NF-1218** . . . . 18 Teeth with Raker Set  
**No. NF-1224** . . . . 24 Teeth with Wavy Set  
**No. NF-1232** . . . . 32 Teeth with Wavy Set



**No. 80968 NICHOLSON "LITTLE-NIC"® UTILITY HACKSAW**


Gets into small places—makes difficult cutting jobs easy. Uses 10" or 12" blades. Supplied with a 10" x 24 Teeth Wavy Set Blade. Overall length, with blade, is 11". Economically priced.

## For Cutting Plastic Laminate

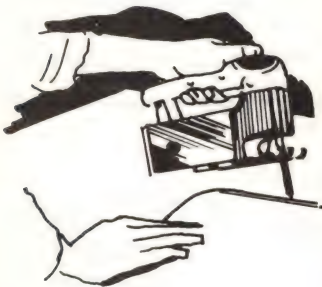

**No. SS2-1FH REMINGTON TC SABRE SAW BLADE** — Lets you make good clean cuts in plastic laminate, with or without plywood backing. The tungsten carbide edge on these blades "walk" right through the toughest materials. Has no teeth to break. Gives up to 10 times longer life than regular blades — this is **real** economy!

Makes its own plunge cut, and has fine grit for smooth unchipped edges. Is 2 7/8" long, with a 1/4" shank size. Can also be used on stainless steel mouldings, ceramic tile, slate flooring, sheet metal to 18 Ga., etc. Packed one blade on a display card, with 5 cards per envelope.

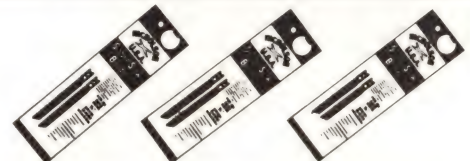

## NICHOLSON SABRE SAW BLADES

**Universal Shank Fits All Popular 1/4" Shank Sabre Saws**

Blister packed 2 each per attractive display card, with valuable usage information.

**No. 81050**—Wood Cutting 3 1/2" Long x 7 Teeth/Inch  
**No. 81057**—Wood Cutting 3 1/2" Long x 10 Teeth/Inch  
**No. 81064**—Laminate Cutting 3" Long x 10 Teeth/Inch

## MUTI-PURPOSE SHEARS . . . for PLASTIC LAMINATE AND METAL

A versatile tool that cuts without curling, cracking or burring! Valuable for trimming laminate all the way into corners. Used by carpet installers for metal mouldings. Cuts up to 18 gauge sheet metal. Unique offset design means no knuckle scraping, and full vision of cutting line. Powerful compound leverage means full cutting power all the way out to the tip of the blades. Has highly visible (in the tool box) orange soft cushion vinyl grips. Made from quality tool steel material for years of dependable service. Weighs 1 lb., and is 9" long overall.

**No. D2CH** — Cuts Left and Straight  
**No. D1CH** — Cuts Right and Straight



## No. 3015 SINK RIM SCREWDRIVER

**Installs sink rim bolts quickly and easily**



This tool takes the aggravation out of your sink rim installation work because it works effectively in "hard-to-get-at" places. The socket is made to fit all #12-24 hex head bolts. Made from cadmium plated tool steel with a comfortable grip plastic handle. Is 14" long overall, and weighs only 1/2 lb.





## METALMITRE TOOLS

## MITRES . . . NOTCHES . . . TRIMS . . . NIBBLES

Metal Mouldings — Plastic Laminate — Sheet Metal — Resilient Tile

No. M 50  
Handle

M1800  
Die Set

M1800CA90  
Die Set

45°  
Die Set

90°  
Die Set

**'CLICK'**— it's mitred  
with one squeeze  
of the hand!

Save time and money with these precision tools that are perfect for use in the shop or on the job. The **No. M 50 Handle** holds all of the various Die Sets shown below. These Die Sets are easily and quickly interchangeable in the Handle. Choose the proper Die Set for your work — more can be added later as the need arises. The assembled unit weighs only 2 lbs. and is 10" long overall. Can be kept in a back pocket while working, and easily fits in a tool box for storage.

### METALMITRE DIE SETS (Replacement Punches Available)

Throat depth on all of the Die Sets is 1"

#### No. M450 45° DIE SET No. M900 90° DIE SET

For all simple mitreing, notching, and trimming. Punch Holder covers Punch completely to give maximum protection against breakage when cutting heavier gauges of metal. No. M50 Handle sold separately.

#### No. M450GS 45° DIE SET No. M900GS 90° DIE SET

The front tip of the Punch Holder has been cut away to allow general mitreing of channel and cap strip mouldings. Each leg of channel-type mouldings is cut separately. No. M50 Handle sold separately.

#### No. M450GSS 45° DIE SET No. M900GSS 90° DIE SET

The front tip on this Punch has been cut away, letting it enter narrower channels such as used on plastic laminate installations. **Should only be used on 18 Gauge (.049"), or lighter, aluminum as other materials or heavier gauges will cause tip breakage.** No. M50 Handle sold separately.

#### No. M450V 45° DIE SET No. M900V 90° DIE SET

Specially made for stainless steel no-drip channel moulding. Will cut both lips without distortion. Special angles are available at extra cost. No. M50 Handle sold separately.

#### No. M1800 DIE SET

Cuts a slot  $\frac{1}{16}$ " wide x 1" long. Used for making screw slots in cap strip, and for slotting to allow bending reverse radii. No. M50 Handle sold separately.

#### No. M1800CA90 DIE SET

Cuts a notch  $\frac{15}{32}$ " wide x  $\frac{7}{8}$ " long. Used for primary cut when mitreing cap strip. Also for gaining clearance when making butt joints. No. M50 Handle sold separately.

### PLASTIC MOULDING TOOLS — That Pay For Themselves From Time Savings and Convenience

#### No. M50-P900R NOTCHING TOOL

Cuts a special V-shaped notch  $\frac{1}{4}$ " wide flush up to the inside face of the moulding. This type of cut prevents "blousing" of the moulding when wrapping small radii and sharp corners. Makes the neatest, smoothest, and most attractive installations!

Once you have tried this tool you'll never want to do without it! Made from heat treated alloy tool steel for many years of beneficial service. Complete tool weighs only 2 lbs. For straight and mitre cutting off, see the No M45 shown at the right.

#### No. M45 TRIMMING TOOL

Specially designed to accommodate irregular shapes. Has a razor sharp hollow ground cutting blade for clean cuts. The guide pins on the base plate are located for 90° square cuts and 45° mitre cuts. Can also be used for other soft materials like rubber extrusions, wood screen mouldings, wood picture frame mouldings, plastic hose, etc. Makes cuts up to  $1\frac{1}{2}$ " wide, is 10" long, and weighs 1 lb.

### "YANKEE" SPIRAL RATCHET SCREW DRIVERS World's fastest and best liked automatic screw drivers

#### No. 68-130

For regular use, and furnished with 2 bits. One is for a  $\frac{1}{32}$ " wide slotted head, and the other for a #2 Phillips head. Length with bit extended  $20\frac{1}{4}$ ", and 15" when closed. Quick return model.

#### No. 68-131


For driving larger screws, and furnished with 2 bits. One is for a  $\frac{1}{4}$ " wide slotted head, and the other for a #2 Phillips head. Length with bit extended  $27\frac{3}{4}$ ", and  $19\frac{1}{2}$ " when closed. Quick return model.

#### No. 68-135

For small screws. Lighter and more sensitive than the No. 130A. One bit is for a  $\frac{1}{32}$ " wide slotted head, and the other for a #2 Phillips head. Length with bit extended  $12\frac{1}{2}$ ", and 9" when closed. Quick return model.



# LUFKIN and STANLEY TAPE RULES

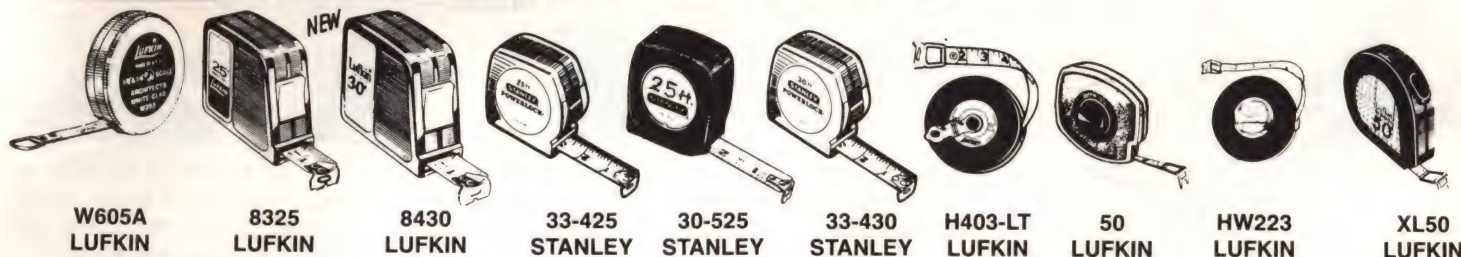

**W605A**  
**LUFKIN**

**8325**  
**LUFKIN**

**8430**  
**LUFKIN**

**33-425**  
**STANLEY**

**30-525**  
**STANLEY**

**33-430**  
**STANLEY**

**H403-LT**  
**LUFKIN**

**50**  
**LUFKIN**

**HW223**  
**LUFKIN**

**XL50**  
**LUFKIN**

The No. W605A Architects Tape is for use on scale plant drawings. One side of the blade has a 1/4" scale, and the other side has a 1/8" scale.

Lufkin Economy Power Tapes have a natural black lightweight durable plastic case, with a front action toggle lock. Blades have black markings on a bright yellow background. The patented rubber cushion on all models helps prevent hook breakage from excessively rapid blade return. All models are supplied with a belt clip.

Stanley Power Tapes feature Du Pont Mylar coated wear-resistant yellow blades with black markings. The 1" wide blade models can be rigidly extended up to 7ft. for hard to reach measurements. The No. 30-525 has an automatic bottom lock, and all other models have front slide locking action. All cases are "Cyclocac" — an extremely strong plastic. All models are supplied with a belt clip.

## LUFKIN ARCHITECTS TAPE:

No. W605A—1/4" wide x 5 ft. long

## LUFKIN ECONOMY POWER TAPES:

No. 8312—3/4" wide x 12 ft. long (Refill No. RY312)

No. 8316—3/4" wide x 16 ft. long (Refill No. RY316)

No. 8325—3/4" wide x 25 ft. long (Refill No. RY325)

No. 8425—1" wide x 25 ft. long (Refill No. RY425)

**NEW** No. 8430—1" wide x 30 ft. long (Refill No. RY430)

## STANLEY POWER TAPES:

No. 33-423—1" wide x 16 ft. long (Refill No. 32-423)

No. 33-320—3/4" wide x 20 ft. long (Refill No. 32-620)

No. 30-525—3/4" wide x 25 ft. long (Refill No. 32-325)

No. 33-425—1" wide x 25 ft. long (Refill No. 32-625)

No. 33-430—1" wide x 30 ft. long (Refill No. 32-230)

**DROP-IN CARTRIDGES for STANLEY POWER TAPES** — includes a fresh replacement blade and a strong new spring. Easy to install.

No. 32-820—for No. 33-320 Tape

No. 32-825—for No. 33-425 Tape

## LUFKIN DACRON WOVEN TAPES

Non-metallic 5/8" wide line for heavy duty use where non-conductivity and resistance to breakage are important, and where steel line accuracy is not required. Large easy-to-read black and red markings on white background. Steel case has vinyl covering. All parts plated for corrosion resistance. Nylon friction washers for smooth winding action. Pushbutton crank release.

No. H403-LT — 50 ft. Long (No. OH403 Refill)

No. H406-LT — 100 ft. Long (No. OH406 Refill)

## LUFKIN LONG STEEL TAPES

Moderately priced with the famous Lufkin accuracy. Features an end hook that folds flat into the tough high impact plastic case. Has an easy-wind nylon drum. Bold black markings for improved legibility.

No. 50 — Lightweight — 50 ft. Long

No. 100 — Lightweight — 100 ft. Long

## LUFKIN BANNER

A professional quality model. Steel case is covered with vinyl fabric. Major parts are plated. A new winding mechanism means smoother retrieving. Easy reading white blade is epoxy coated for long life. Has bold black graduations, and the instantaneous markings are in red.

No. HW223 — "Banner" — 50 ft. Long

No. HW226 — "Banner" — 100 ft. Long


## LUFKIN POWER TAPE

This new 50 ft. long Tape has a non slip textured case that can be comfortably held in your hand. The 3/8" wide yellow blade has a 2 position end hook. The red button gives you a smooth automatic power rewind. The Tape gives you convenience and longer measuring.

No. XL50




## WOOD FOLDING RULES

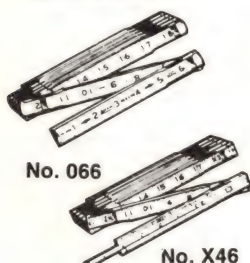

No. 066

No. X46

Superior design and workmanship are the reasons why Lufkin makes the best folding rules in the world. Made from select straight grained hard maple, they also feature triple locking joints which eliminate end play. Select any of these professional models suited to your needs. The Nos. 066, 066F, and 966 have a white finish with black markings. The Nos. X46 and X46F, which have a 6" brass extension slide, have black markings on a tan boxwood finish.



No. 966

LEFT HAND READING



RIGHT HAND READING

No. 066 — 6 ft. Long — Outside Reading


No. 066F — 6 ft. Long — Inside Reading

No. X46 — 6 ft. Long — Outside Reading

No. X46F — 6 ft. Long — Inside Reading

No. 966 — 6 ft. Long — Two-Way Reading

## KESON FIBRE GLASS TAPES



Exceptional Japanese Value! It will not stretch, shrink, crease, or deteriorate. Clean with water. In feet, inches, and 1/8"s on one side, and is 1/2" wide. Plastic covered steel case; 2 popular lengths.

No. MC-18-50 — 50 ft. Long Tape

No. RF-18-50 — 50 ft. Refill

No. MC-18-100 — 100 ft. Long Tape

No. RF-18-100 — 100 ft. Refill



## GUNDLACH SPOTLIGHT POWER TAPES

Light goes on automatically when blade is locked! For error free reading in dimly lit places. Powered by a long-lasting replaceable lithium battery. Reverse side of blade gives an inside measurement **without** adding the case dimension! No chance for a mistake! Has yellow epoxy coated blades, chrome plated sturdy case, a positive front blade lock button, and a sliding end hook.

No. 325L—3/4" x 25 ft. (Refill No. R325)

No. 425L—1" x 25 ft. (Refill No. R425)



## GUNDLACH NOTCHED TROWELS for FLOOR and WALL TILE ADHESIVES

All Gundlach Professional Trowels have the popular "California Handle" (also known as "Camel Back") hump-backed handle shape for a comfortable grip. Top quality sanded hardwood is used for all wood handle Professional Trowels. **All Gundlach Professional Trowels are Unconditionally Guaranteed.**

**No. 9 PROFESSIONAL TROWEL**—Has a 4½" wide x 11½" long high carbon bright spring steel blade for maximum life on abrasive surfaces. Stocked in all of the notches shown below, plus the FCA-FFA and FFA-FCA 4-side notching combinations. LEFT HAND models are stocked in the FCA, FFA, and RCA notches.

**No. 9 BLUE STEEL PROFESSIONAL TROWEL**—More flexible than the bright steel blade in the regular No. 9 Trowel—for work where this flexibility is desirable. Stocked in the popular FCA, FFA, and RCA notches.


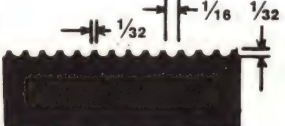






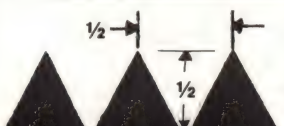
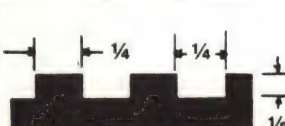
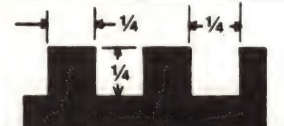
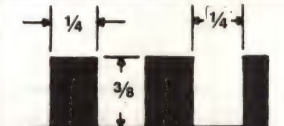
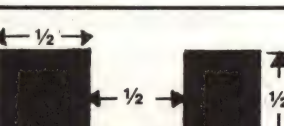

**No. 9 ALUMINUM HANDLE PROFESSIONAL TROWEL**—Has a cast aluminum handle having finger grips on the bottom side for a comfortable positive grip. Has a sanded non-slip finish, and will not blacken the hand. Trowel can be cleaned by completely submerging in a cleaning solution. Stocked in the popular FCA, FFA, and RCA notches.

**No. 16 EXTRA LARGE PROFESSIONAL TROWEL**—Has a 4" wide x 16" long high carbon bright spring steel blade for maximum life on abrasive surfaces. Stocked in all of the notches shown below.

**No. 4 PROFESSIONAL TROWEL**—An economy model having a 4½" wide x 10½" long blade made from a good grade of tempered carbon steel. Stocked in all of the notches shown below.

**No. 1022 ECONOMY TROWEL**—For "do-it-yourself" or "throwaway" use. Has a wood handle securely fastened to the 4" x 9" carbon steel blade. Stocked in the two 4-side notching combinations of FCA-FFA and FFA-FCA. The following 2-side notchings are also available: FCA, FFA, KTA, RCA, WS, CWM, MP, CTB, and QT. Packed 12 per box, 72 per shipping carton.

### SPECIFY TROWEL No. and NOTCH No. WHEN ORDERING

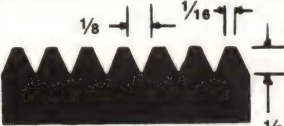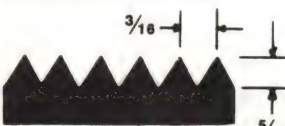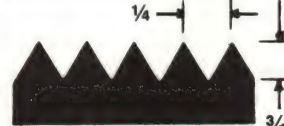
 <p><b>FCA</b></p>	 <p><b>FFA</b></p>	 <p><b>KTA</b></p>	 <p><b>RCA</b></p>
 <p><b>FOW</b></p>	 <p><b>WS</b></p>	 <p><b>CWM</b></p>	 <p><b>DCW</b></p>
 <p><b>MFT</b></p>	 <p><b>MP</b></p>	 <p><b>CTB</b></p>	 <p><b>QT</b></p>
 <p><b>BSN</b></p>	 <p><b>No. 1294 "Lid-Off"</b></p>		

#### No. 1294 "Lid-Off"

Open plastic pails quickly with this new tool. Saves time and aggravation. Removes tightly sealed lids safely and easily. No more dangerous lock cutting. Won't distort lids—pails can be reclosed. A durable one-piece plastic tool. Has illustrated instructions on each box. Every mechanic needs one!



## "HALF MOON" STYLE ADHESIVE SPREADERS



No. MS26-FCA

Low cost, an ideal "give away" item. Three popular notches. Packed 100 per carton.



No. MS26-FFA



No. MS26-CWM

## ROLLED TOP STYLE ADHESIVE SPREADERS



**No. MS91** — 9" Wide x 5" High. Has the FCA notching for Linoleum, Asphalt Tile, and Rubber Tile. Packed 25 each per shipping carton.



**No. MS93** — 9" Wide x 5" High. Has the FFA notching for Vinyl and Vinyl Asbestos Tile. Packed 25 each per shipping carton.



**No. MS23** — 4 3/8" Wide x 5" High. Has the WS notching for Plastic and Ceramic Wall Tile. Packed 25 each per shipping carton.



## ALL METAL REPLACEABLE BLADE TROWEL

This Unit features a cast aluminum handle-shank. It attaches to economical full size 4 1/2" x 11" hard tempered steel Blades. These blades are notched on all 4 sides. They are not only replaceable, but use all sides because they are reversible! Blades have square edges, and the trowel, therefore, is either right hand or left hand. The blades are dimpled on the bottom so that the flat head of the adjustable retaining screw lies flush with the bottom side of the blade. Blade changing or reversing is quick and easy. Order the **No. 161-TH Trowel Handle** separately. Available Blades are: **No. 161-FCA**, **No. 161-FFA**, **No. 161-KTA**, and **No. 161-WS**.


## CEMENT FINISHING TROWELS




For powder type underlayment work. Also can be notched with either tool shown below for a longer

adhesive Trowel. Features an exceptionally smooth blade, a strong aluminum alloy shank, and the Camel Back Handle which is preferred for finishing work. Top professional quality.


**No. CF-414**—4" Wide x 14" Long Other sizes on Special Order. See Page 53 for Wall Plastering Trowels  
**No. CF-416**—4" Wide x 16" Long

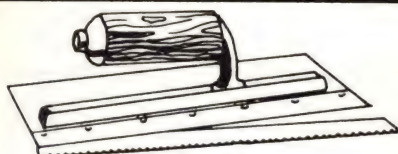

Tempered Swedish Steel Replacement Blade easily removed.



Quick and simple insertion of Replacement Blade.



How to get under radiators, cabinets and other tight spots.

## No. IJ-F "INJECTA NOTCH" REPLACEABLE BLADE TROWEL

A patented professional style trowel with many advantages. Saves tool box space since fewer different notched trowels are needed. Saves money since blades cost a lot less than new trowels. Trowel is 4 1/2" wide x 11" long, and has a 10° angled leading edge. Can easily be cleaned by soaking in kerosene or water (depending on the particular adhesive solubility). Available in Right Hand model only. No blades are supplied with the trowel — choose blades for your specific needs from the selection shown below.

**REPLACEMENT BLADES**—are 1" wide x 11" long. Made from high carbon heat treated spring steel for long wear. Packed 10 each per notch per box. Available Blade notchings and Stock Nos. are:

For Resilient and Carpet Adhesives: **IJ-FCA**, **IJ-FFA**, **IJ-KTA**, **IJ-RCA**, and **IJ-FOW**.  
For Ceramic and Wood Block Mastics: **IJ-CWM**, **IJ-CTB**, and **IJ-QT**.

See Page 41 for illustrations and dimensions of these notches.

## ADJUSTABLE TROWEL NOTCHERS

This tool has long been needed to prolong trowel life to insure correct coverage of adhesives and mortars from job start to finish. Two models—one for "V" notches and one for square notches. Both feature easily adjusted screws to gauge the desired depth of the notch. Cutting dies made from top quality alloy tool steel, and are properly heat treated for long life.

**No. TN-344**—Adjustable Square Trowel Notcher: 1/4" Wide x 1/2" Deep maximum capacity with a single punch. Wider notches are possible by making additional punches.

**No. TN-345**—Adjustable "V" Trowel Notcher: 1/2" Wide x 1/2" Deep maximum capacity with a single punch.



## FIXED TROWEL NOTCHERS

These tools prolong the life of your notched adhesive spreading trowels. One squeeze of the hand produces a new notch. Both models are 9" long and weigh only 7/8 lb.

**No. TN-90**—Makes a "V" shaped notch 1/8" wide x 1/16" deep.

**No. TN-842**—Makes a "V" shaped notch 1/8" wide x 1/8" deep, with a 1/32" flat at the front of the notch.

**No. TN-90-RB** —Repl. Blade for No. TN-90  
**No. TN-842-RB**—Repl. Blade for No. TN-842



## NOTCHED SCRAPERS For Cove Base Adhesive & Use in Hard to Reach Places



### PROFESSIONAL SCRAPERS

These semi-flexible scrapers have "V" shaped notching 5/32" wide x 1/8" deep. Straight blade is made from polished stainless steel for long life.




**No. 93** —3" Wide Blade  
**No. 94** —4" Wide Blade




### ECONOMY SCRAPERS

These low cost scrapers are available in the FCA and WS notches shown on Page 41. The hard temper blade is angled and 2 3/4" wide. Excellent for DIY. Packed 10 per box.


**No. 83-FCA**



**No. 83-WS**



## NOTCHED TROWEL SHARPENING FILES



Used to maintain proper notch depth. Triangular file is for "V" notches and the 1/4" square file for MP, CTB, QT, and BSN notches shown on Page 41.

**No. 14729**—8" Triangular  
**No. 12967**—6" Square



# CERAMIC TILE CUTTERS

## SUPERIOR BRAND



No. 00  
CUTTER



No. 1A CUTTER  
No. 2A CUTTER



No. 1AA CUTTER



No. 3-400  
CUTTER



No. 4-400  
CUTTER

Made from sturdy cast aluminum alloy and steel for heavy duty lengthy service. They score and cleanly break tile and trim pieces without moving the material. All models have the famous "A" Type Spring Tension Handle, which provides automatic adjustment to the breaker bar for true straight cuts every time. Superior, the pioneer manufacturer, offers numerous models to solve your cutting problems.

**NOTE:** Numbers with a "400" suffix are equipped with a No. 400 Carbide Scoring Wheel.

**No. 00 and No. 00-400**—A smaller low cost cutter ideal for loan or rental. Cuts tile up to 6" straight and 4 1/4" diagonally. Has a 4" working table on right side and 2 1/2" on left side. Has an angle gauge, and No. 00 has a 3-W Scoring Turret. Is 6 1/2" x 12" overall.

**No. 1A and No. 1A-400**—Cuts tile up to 6" straight and 4 1/4" diagonally. Has a 6" working table on both sides of the breaker bar. Has an angle gauge, and No. 1A has a 6-W Scoring Turret. Is 12" x 12" overall.

**No. 2A and No. 2A-400**—Cuts tile up to 10" straight and 6" diagonally. Has a 7 1/2" working table on both sides of the breaker bar. Has an angle gauge, and No. 2A has a 6-W Scoring Turret. Is 15" x 15" overall.

**No. 1AA and No. 2AA**—Feature the all-angle protractor gauge. Can set to desired angle in a few seconds. Both have a 6-W Scoring Turret, and capacities slightly larger than No. 1A and No. 2A respectively.


**No. 3-400**—For large tile, it cuts up to 12" straight and 8" diagonally. Has a 10 1/2" working table on right side and 4" on left side. Breaker bar height is adjustable to allow cutting of tile up to 1 1/2" thick. Has an extra large angle gauge, and is 16 1/2" x 21" overall.

**No. 4-400**—For sheet ceramics and thin tile up to 24" long. Has 6" working table both sides, and a slideable gauge bar the entire length of the table.

**No. 4AA-400**—Same size, but has the all-angle protractor gauge.

Replacement parts are available for all of these Ceramic Tile Cutters.

## CRAIN BRAND

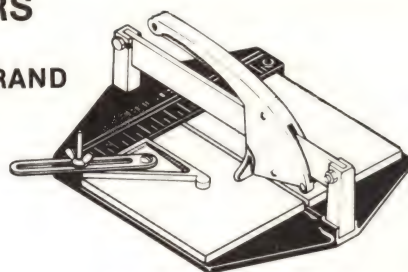

Made from die cast aluminum alloy for lighter weight, and have some new innovative features. The angle gauge is reversible to either side of the base, and has a "stop" for easier and more accurate diagonal cutting. The 2 larger models have a 2" longer handle for greater breaking leverage. Rubber pads are securely held on pegs to reduce chance of loss, yet easily removable for cleaning. See the following list of available models.

### No. 030 (with a 3-wheel Scoring Turret)

Cuts tile up to 6" straight and 4 1/4" diagonally. Economically priced. Has the standard 10" handle, and is 7" x 11" overall.

### No. 031X (with Carbide Scoring Wheel)

Has a wider 8" bed. Cuts tile up to 6" straight and 4 1/4" diagonally. Has the standard 10" handle, and is 10" x 13" overall.

### No. 032X (with Carbide Scoring Wheel)

Has a 10" wide bed. Cuts tile up to 10" straight and 6" diagonally. Has the longer 12" handle for easier breaking, and is 13" x 16" overall.

### No. 033X (with Carbide Scoring Wheel)

For very large tile. Has a 12" wide bed. Cuts tile up to 12" straight and 8" diagonally. Has the 12" long handle, and the 2-position breaker bar for cutting tile up to 1 1/2" thick. Is 14" x 19" overall.

### No. 400 CARBIDE SCORING WHEEL



1/2" diam. for easier and deeper scoring on harder tile and trim. Stays sharp longer. Fits all Superior and Crain models, except Crain No. 045X. Supplied complete with screw, bushing, washer, lock nut, and mounting instructions.

### STEEL WHEEL SCORING TURRETS



No. 3-W



No. 6-W

Low cost replacements for ceramic tile cutters. When dull, simply rotate to new wheel.

**No. 3-W**—3-Wheel (2/pkg)  
**No. 6-W**—6-Wheel (2/pkg)

## No. 31 MONTOLIT TILE CUTTER

This cutter gives smooth straight cuts on numerous **VERY HARD** tile currently on the market. It performs so well that tiles which had required sawing can now be cut with this machine. Equipped with an angle gauge to cut tile up to 12" straight and 8" diagonally. To use, simply adjust the bar so that the tile is clamped by exerting slight hand pressure on the rear handles. Then, while holding this pressure, score the tile. Now, apply more pressure until the tile cuts clean.


**No. 241**—Repl. Carbide Scoring Wheel

## No. 26 MINIMONTOLIT CUTTER

Cuts tile up to 12" straight. Has a graduated scale and tile support base extension. Four non-skid rubber feet provide a solid base when scoring. Long, contoured handle is designed to prevent finger pinching when breaking. Made from die cast aluminum with a plated steel breaker bar. Economically priced.

**No. 243**—Repl. Carbide Scoring Wheel


## No. 045X CRAIN HEAVY DUTY CUTTER



Designed for the new harder high density tiles. Lever handle mechanism provides deeper "pressure scoring" with the 7/8" diam. carbide wheel. Deeper scoring for cleaner cuts! Eliminates costly wet sawing. 12" handle gives 6-to-1 leverage for easier breaking. Cuts tile 12" straight and 8" diagonally, is 14" x 19" overall.

**No. 046**—Repl. Carbide Scoring Wheel

## No. 2102 TOMECHANIC 24" TILE CUTTER




Especially good for sheet mosaics, this machine can cut them without "scoring and breaking"—it uses only a simple sawing action! Makes conventional cuts as narrow as 3/4" on tile up to 24" x 24". Cuts tile up to 5/8" thick with cutting handle that glides on ball bearings. Gauge extends to 14" and cutter is supplied with an auxiliary support for large tile.

**No. 118**—Repl. Carbide Scoring Wheel



## No. 8803 RUBI TILE CUTTER

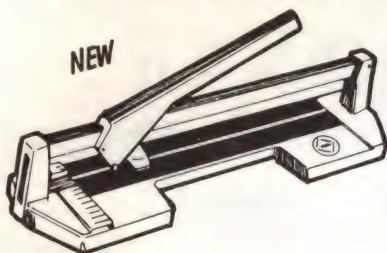

This economical cutter can make straight cuts in tile up to 12" X 12". Solidly constructed of cast aluminum, it has a brass plated bar. This is the low cost model where price is a factor. Excellent for D-I-Y Sales.

**No. 9804**—Replacement Carbide Scoring Wheel

## No. 025 CERAMIC TILE CUTTER


**Just score, and squeeze to break**



Low cost — ideal for do-it-yourself installers. For the pro, it cuts textured surface tile, and handles quarry up to 1/2" thick. Has a long life 1/2" carbide scoring wheel, and comfortable rubber grips on the steel handles. Packed in an individual display carton containing illustrated and written instructions. Weighs 8 oz., and is 8 1/2" long.

**No. 025-RSW(F)** — Repl. Carbide Scoring Wheel

## No. 25-SC SLATE CUTTER



A portable tool for on-the-job cutting of slate 1/4" thick and thinner. Straight, as well as curved cuts can be made since each stroke cuts about 1". Excellent for cutting inside and outside corners and notches. Cutting line is easy to follow. Cut from both edges towards the center to avoid corner breakage. Mount on a board for more stable operation. Simple construction—nothing to go wrong. Weighs only 8 lbs. Economically priced.

## CERAMIC and MOSAIC TILE NIPPERS

### SUPERIOR CUTTER BRAND



centered jaws



offset jaws

All four models are 8" long, have carbide tipped jaws, handle stops, plastic handle grips, and convenient coil spring re-opening action.

**No. 80**—Has offset "side biter" 5/8" straight jaws.

**No. 40**—Same as No. 80, but with 1/2" jaws.

**No. 85C**—Has centered 5/8" jaws. One jaw is convex shaped to reduce biting force needed when cutting harder tiles. The other jaw is straight.

**No. 85C-1**—Same as No. 85C, but with both jaws convex shaped. Made especially for Glass Mosaic and Ceramic Floor Tiles.



### CERAMIC TILE NIPPERS DIAMOND BRAND

These 8" Nippers feature an exclusive handle shape that lessens the distance required to open the hand while using. Both models have offset "side biter" jaw design, and handle stops to keep the cutting edges from biting completely together. The cutting edges are straight, and are 5/8" wide. Both models have dip coated bonded plastic handle grips.

**No. GT28C**—A professional wall tile model with tough carbide tipped cutting jaws. Has automatic spring powered re-opening action, and a black finish.

**No. GT28H**—A wall tile model that is chrome plated for rust protection. Has durable and economical tool steel cutting jaws that are re-opened manually.

## IMPORTED TILE NIPPERS



### No. 2-1 CERAMIC TILE NIPPERS

This 8" long model has the popular offset "side biter" style jaws. 5/8" straight jaws are carbide tipped for long life. Plastic coated handles have "stop pads" and convenient coil spring re-opening action. This is a top quality import nipper!



### No. 5-1 QUARRY TILE NIPPERS

This 10" Nippers is designed for easy working with hard and thick materials. 5/8" center style jaws are carbide tipped with one straight jaw and the other convex shaped to reduce biting force. Forged steel handles have plastic coated grips and "stop pads." Opens to 2" for ease of entry.



### No. 5656 CERAMIC TILE NIPPERS

8" offset "side biter" Nippers features popular handle style. 5/8" straight jaws are carbide tipped for long wear. Has forged steel handles with convenient spring re-opening action. Handles have plastic coated grips.



### No. 3-1 CERAMIC TILE NIPPERS

One jaw of this 8" Nippers is straight, the other is on an angle, and the result is less cutting effort. Popular "side biter" style with 5/8" carbide tipped jaws.



## No. RS10C TC ROD SAW — 10" long    No. RS12C TC ROD SAW — 12" long


Quickly and easily cut curves and notches in ceramic wall tile, marble, slate, etc. Every tilesetter should have one of these! Cut in any direction — on the forward as well as on the reverse stroke. The tile in this photo was cut in only 34 seconds. After wear occurs, it can be turned upside down for new life. They fit any adjustable hacksaw frame. Every "do-it-yourself" installer should be sold one of these! Packed one on an attractive display card for easy resale; 10 cards per box.

## No. SS2-1FH TC SABER SAW BLADE



This toothless "grit edge" blade is great for difficult cuts on ceramic wall tile, marble, quarry tile, slate, etc. Since plunge cutting is possible, a section of tile can be cut right out of the wall! Has a fine grit for clean edges without chipping. Can be used for many other hard materials. Blade is 2 1/2" long, and has a 1/4" universal style shank. Packed one on a display card; 5 cards per envelope.

## No. HS12CH TC HACKSAW BLADE



Cuts all kinds of tile materials just like the Rod Saw. It is preferred by some users because it is easier to make straighter cuts in thicker materials—like marble door sills. 12" size fits any standard hacksaw frame. Packed one per display card for easy resale, 10 cards per box.




## TARGET TILE SAWS...All Target tile saws include these outstanding features:

- **Bigger Capacity**—Sturdier Construction.
- **Target High-Volume Water Pump**—Recirculating—Self Contained Motor—Built-in Thermal Protection. Delivers Consistent Volume of Coolant.
- **Compact Precision Greased and Sealed Ball Bearings**—Never need lubricating. No Maintenance.
- **Wide Open Cutting Area**—No obstructions—full use and view of the cutting area. Greater hand-clearance. No obstruction of material travel.

- **Blade Guard Design**—For Instant Blade Changing. No Screws or Bolts to Remove.
- **Heavy Duty Reinforced Cast Aluminum Conveyor Cart**—Has Graduated Scale on the Precision Machined Back Guide for Accurate Cutting. Easy-Rolling Wear-Resistant Nylon Wheels Run On Solid Steel Tracks.
- **Tile Matic Tray Saw Models**—Tray Position Easily Adjusts on the No. T-10 Stand for More Convenient Operation on Larger and Smaller Material. An Exclusive Target Feature!


**No. TA-1075**  
¾ HP Motor  
**10" Blade Capacity**  
Dimensions  
L W H  
34" x 20¾" x 20¾"  
Shipping Wt. 105 lbs.

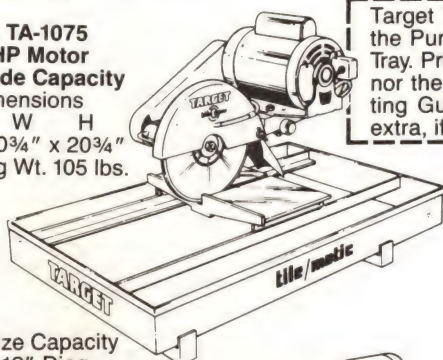

Cutting Size Capacity  
18" sq. 12" Diag.


Target Tile Saw prices include **ONLY** the Pump, Rip Guide, and the Tub or Tray. Prices do **NOT** include the Blade, nor the Nos. T-12, T-13, and T-14 Cutting Guides. These must be ordered extra, if desired.

◀ Cutting Size Capacity ▶  
18" sq. 12" Diag.

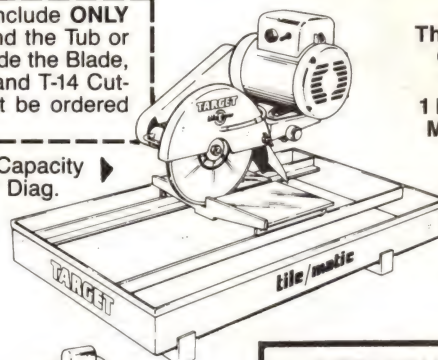

**No. TA-10100**  
The Powerful Saw with Big Capacity for the Really Tough Jobs.

**1 HP Target Power Packed Motor with "Guard-Lite" Motor Protection**  
Dimensions  
L W H  
34" x 20¾" x 21¾"  
Shipping Wt. 123 lbs.  
**10" Blade Capacity**

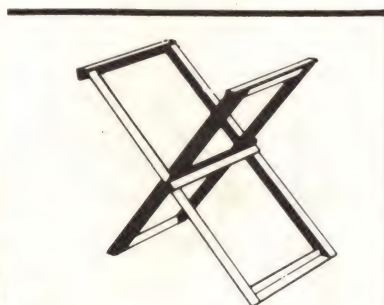


**No. T-10 Folding Steel Stand**  
For "TA" Model Tile Saws. 27" High. Folds flat when not in use. Weighs 21 lbs.




**No. T-850**  
½ HP Motor  
**8" Blade Capacity**  
Dimensions  
L W H  
26½" x 22¼" x 22½"  
Shipping Wt. 61 lbs.

**No. 3-SQT**—Replacement Square Galvanized Steel Tub for Nos. T-850 and T-875.



**No. T-875**  
¾ HP Motor  
**8" Blade Capacity**  
Dimensions  
L W H  
26½" x 22¼" x 24½"  
Shipping Wt. 67 lbs.

### OPTIONALLY AVAILABLE CUTTING GUIDES FOR TARGET TILE SAWS

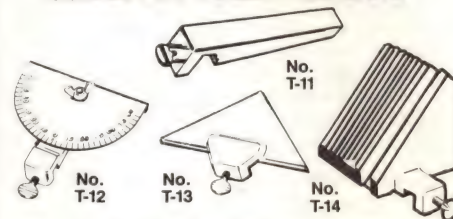


**No. T-11**—Rip Guide (Supplied with Saw)  
**No. T-12**—Adjustable 90° Protractor  
**No. T-13**—Dual 45° Flat Angle Guide, for Right and Left Hand Cuts  
**No. T-14**—Bullnose Miter Guide

**No. 052111 FRAME HANGERS (NOT ILLUSTRATED)**—For Tub Saws only, to elevate the surface of the Conveyor Cart higher than the top of the tub ledge—so that wider material can be cut. 4 per Set.

### No. VC-6 TARGET VERSA-CUT TILE SAW *Designed To Make Sawing Easier!*

This lightweight unit features a pivoting head, and a tough double wall combination case/water pan. The cutting head is adjustable for height, and can also be secured at any angle up to 45° for bevel cutting—without using a miter guide. The head slides freely on a rigid combination roller/linear bearing system. The open side design allows straight cuts up to 12" wide, and diagonal cuts on 12" tile. Normal maximum length of cut is 17¼", but longer cuts can be made by removing the backstop from the textured grip cutting table. Uses 6" diameter x ⅝" arbor blades (not supplied) to give a maximum cutting thickness of 1⅝". Case bottom (water pan) has a drain plug, and frame is easily removed for cleaning. Convenient case handle allows unit to be carried like a suitcase. Powered by a double insulated Black & Decker direct drive motor, the saw is rated at 2¼ HP and 5500 rpm. Includes a submersible pump and a No. T-12 Adjustable 90° Protractor for making either flat angle, or straight, cuts. Complete unit weighs only 45 lbs. and measures 25" L x 19" W x 15½" H.

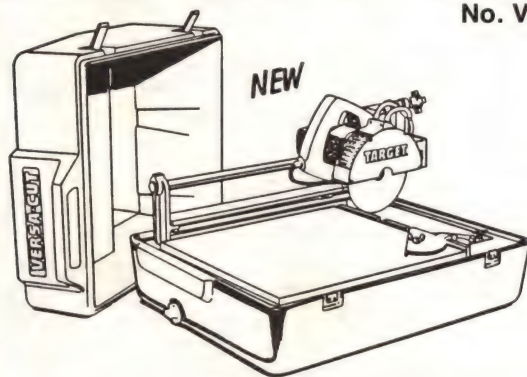

### No. 1657 GROUND FAULT CIRCUIT INTERRUPTER (GFCI)



A GFCI protects the user of an electrical tool from shock caused by worn insulation, faulty connections, wet working conditions, and other hidden electrical problems by shutting off the flow of electricity within 1/40th of a second. Has a Test and Reset button to check for proper operation. GFCI protects **only** from its outlet to the tool—its cord is not protected. 14 Gauge 3-wire cord is 6 ft. long and rated for 125 VAC, 15 Amps. U.L. Listed. To assure protection, the GFCI plug **must** be used in a properly grounded and polarized outlet. Use the No. 1309 Analyzer below to determine if an outlet is properly wired.

**No. 1309 3-WIRE CIRCUIT ANALYZER**—Plugs into any standard grounded outlet and provides instant detection of faulty wiring.




### No. 051200 PUMP W/REDUCER VALVE



Supplied as original equipment with Target Tub and Tray Tile Saws, this high capacity pump can also be used as a replacement with other saws. Equipped with a brass reducer valve to regulate flow. Has an intake filter with screen. Must be operated totally submerged for proper cooling. Uses a 6 ft. 3-wire cord to operate on 115 VAC. U.L. Listed.


**No. 032124 REPAIR KIT FOR 051200**—Includes impeller, intake housing and cover, filter with screen, screws, and gaskets.



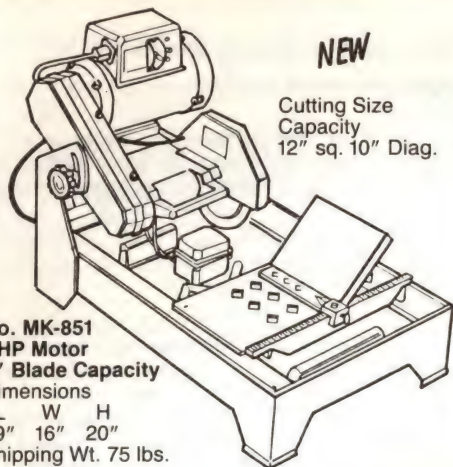


These MK Tile Saws have a rigid, unitized frame and slide bar for precise and easy cutting. Made of a high strength plastic, the water pan is lightweight and can't rust or dent. Equipped with a drain plug, the water pan is also easily removed for cleaning. Cast aluminum blade guard is hinged to allow easy blade changing. Fittings and excess tubing at the blade guard are eliminated as the water system is cast into the blade guard. 45° mitering is quick and easy as the conveyor cart has a flip-up miter guide. Each saw is supplied with a No. MK-11 Rip Guide and a submersible pump. Blade is **not** included. Optional accessories are available as shown to the right.

## MK TILE SAWS

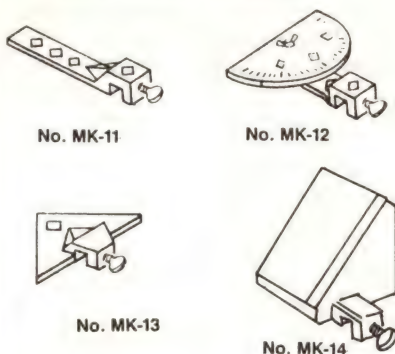


### OPTIONAL ACCESSORIES

No. MK-10—Folding Steel Stand for all MK Tile Saws (Not illustrated)  
No. MK-11—Rip Guide (Supplied with Saw)  
No. MK-12—Adjustable 90° Protractor  
No. MK-13—Dual 45° Flat Angle Guide  
No. MK-14—Bullnose Miter Guide  
No. MK-18D—Diagonal Cutting Kit for 18" x 18" Tiles (Not Illustrated—for use with Nos. MK-101 and MK-115 Saws)  
No. MK-24S—Straight Cutting Kit for 24" x 24" Tiles (Not Illustrated—for use with Nos. MK-101 and MK-115 Saws)

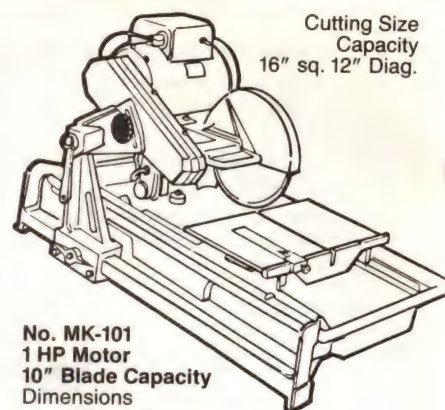


No. MK-115 TILE SAW—Identical to No. MK-101 shown above, but with a 1½ HP motor for increased power and speed. Especially good for hard, dense materials such as granite and marble. Can be used with 115 VAC or 230 VAC. Shipping weight is 132 lbs.

## MITERING JIGS FOR CERAMIC TILE SAWS

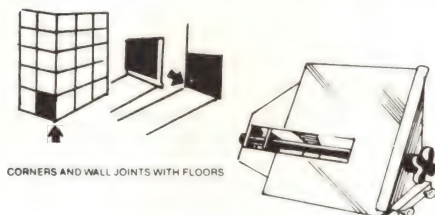

A really valuable tile saw accessory for making precision 45° inside/outside angle cuts. Eliminates need for trim pieces at inside and outside corners, wall-floor joints, etc. Especially desirable for imported tile, for which no trim pieces are available. Adjustable for tile sizes from 4" through 12". Made from durable heavy gauge steel. Clamps securely to tile saw conveyor cart.

No. 050102—For Target Nos. TA-1075 and TA-10100  
No. 136325—For MK Nos. MK-851, MK-101, and MK-115

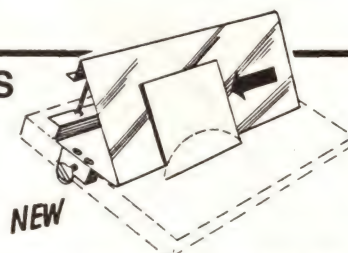

No. JTS-45—For use with the Gundlach Junior Tile Saw shown below. Made from galvanized heavy gauge steel.

## GUNDLACH JUNIOR CERAMIC TILE SAW

### A Compact Lightweight Contractor Grade Saw...Moderately Priced!


Here is a wet saw that is as portable and convenient to use as a tile cutter! Its compact size lets you keep it close by when working in small areas. Also, it is lightweight, and is so well balanced that it can be carried comfortably with only one hand! Furthermore, this saw does not need a coolant pump—thereby eliminating lost time, aggravation, and expense involved with pump failures. Take advantage of these benefits NOW by ordering your saw today from your Gundlach Tool Distributor!

**BLADE**—Designed for 6" diam. size only. Blade is *included* in the price. See the wide selection of blades on Page 47 and select in relation to your needs.

**MATERIAL THICKNESS CAPACITY IS 1"**—Cove Base and Cap. Tile mitring can be done either free hand or a "home made" hardwood block guide can be used by sliding against the Rip Fence.

**TOP**—Has no obstructions to prohibit cutting of oversized material. Measures 11½" x 11½" square, and is chrome plated and polished. A rip fence and a flat miter gauge (for 45° cuts) are included in the price.

**WATER PAN**—Holds water as a blade coolant. This eliminates pump cost and pump problems. Held in frame by 2 brackets, and is easily removed for sludge removal and cleaning.

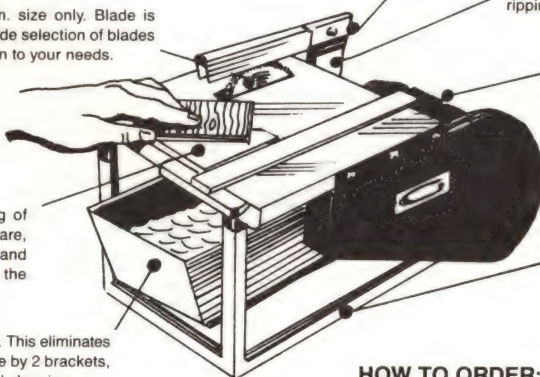

★ Blade is *included* in the price.

**SPLASH GUARD**—Protects operator from water spray, and it also collects and drips the water coolant to the blade at the point of cutting. Vertically adjustable for varying thicknesses of material.

**SPLASH GUARD SUPPORT**—Thinner than the blade, permitting cuts of any length such as ripping a marble threshold.

**MOTOR**—Made for continuous heavy duty operation without overheating. Induction style for full power under load! Quiet operation! Available in ½ H.P. for thinner and softer tile, and ¾ H.P. for thicker and harder materials. Has modern safety features. The on/off switch is mounted on the motor, and an 8 ft. 3-wire cord is supplied.

**FRAME**—Sturdy welded steel construction for long term dependable service. Measures a really compact 20" long x 12" wide x 9" high.

### HOW TO ORDER:

1. Specify motor size (½ H.P. or ¾ H.P.).
2. Select the 6" blade desired from Page 47.
3. See a complete list of Stock Nos. in the Price List. Remember, the blade is *included* in the price—nothing extra to buy.



## TWO STYLES:



SOLID  
CORE



PERFORATED  
CORE

"SOLID CORE" is the conventional and traditional style used by many manufacturers.

"PERFORATED CORE" is a design that delivers more coolant to the diamond rim. This reduces heat, and produces longer life—especially when used on the harder tile materials. 6" blades have 10 equally spaced perforations. 8" and 10" blades have 12 equally spaced perforations.

## PREMIUM QUALITY CONTINUOUS RIM DIAMOND BRAND TILE CUTTING BLADES

These superlative blades are made to specifications generated by years of research and field testing. They provide chatter-free fast and true cuts. They feature wider rim thicknesses, with more diamonds, for better cutting clearance and lower cost-per-cut. The bonding materials, and process, fuses the diamond rim so strongly that 100% of it is utilized! Many satisfied users permit us to highly recommend these blades. All sizes are supplied with a  $\frac{5}{8}$ " arbor.

Type T3—The universal blade for all ceramic tile materials.

Type T4—Same as T3, except has a coarser diamond size for longer life on hard body materials.

Type T5—Specially formulated for marble and other very hard materials. Higher diamond concentration and more facets produces a smoother cut than segmented blades.

### STOCK NUMBERS AND DESCRIPTION:

	SOLID CORE	PERFORATED CORE	RIM THICKNESS	SIZE AND TYPE
(W)	No. 6-T3 No. 8-T3 No. 10-T3	No. 6-T3-PF No. 8-T3-PF No. 10-T3-PF	.050" .055" .060"	6" Diameter Type T3 8" Diameter Type T3 10" Diameter Type T3
(W)	No. 6-T4 No. 8-T4 No. 10-T4	No. 6-T4-PF No. 8-T4-PF No. 10-T4-PF	.050" .055" .060"	6" Diameter Type T4 8" Diameter Type T4 10" Diameter Type T4
(W)	No. 6-T5 No. 8-T5 <b>NEW</b> No. 10-T5	— — —	.050" .055" .060"	6" Diameter Type T5 8" Diameter Type T5 10" Diameter Type T5

### TARGET SUPER-LOK DIAMOND TILE BLADES



(W)

Have continuous rim construction that virtually eliminates chipping. The "Wrap-Around" rim gives grab-free performance, amazing durability, and guards against rim separation. For use on all types of tile and related materials.  $\frac{5}{8}$ " arbor.

No. 6-TTB—6" No. 8-TTB—8" No. 10-TTB—10"

### TARGET GOLD INTER-LOK DIAMOND TILE BLADES



(W)

Specially designed for freer cutting and longer wear on hard and dense materials. A stronger and harder bond gives a longer period of diamond retention. Recommended for use on quarry tile, brick, marble, cast concrete tile, pavers, terrazzo tile, etc.  $\frac{5}{8}$ " arbor.

No. 6-IL—6" No. 8-IL—8" No. 10-IL—10"

### CONTINUOUS RIM DIAMOND TILE CUTTING BLADES



(W)

Fast cutting, good quality blades. Continuous rim construction provides smooth, chip free performance. Formulated for general use on ceramic wall and floor tiles. Economically priced.  $\frac{5}{8}$ " arbor.

No. 6-LOK—6" No. 8-LOK—8" No. 10-LOK—10"

### SEGMENTED DIAMOND TILE CUTTING BLADES



(W)

For very hard and dense materials. Premium quality for free cutting and substantially longer life. The diamond grit size and concentration make them especially suitable for hard brick, quarry tile, marble, swimming pool tile, pavers, etc. May cause chipping along the cut.  $\frac{5}{8}$ " arbor.

No. 6-SEG—6" No. 8-SEG—8" No. 10-SEG—10"

### DRY CUTTING MASONRY BLADES



(D)

Used on portable electric saws to cut ceramic tile, stone, brick, masonry block, etc. Silicon carbide blade is double reinforced with nylon mesh to prevent disintegration if broken from improper use. Includes bushings for  $\frac{1}{2}$ " and  $\frac{5}{8}$ " round, and  $\frac{1}{2}$ " square arbors.

No. CF-63-AC—6" x  $\frac{3}{32}$ " No. CF-73-AC—7" x  $\frac{3}{32}$ "

### No. 180-DS DRESSING STICK

#### —for Diamond Tile Blades




By cutting off 2 or 3 thin slivers, diamonds are re-exposed for "like new" performance. All diamond blades require periodic dressing. Stick is an extra fine grit aluminum oxide,  $\frac{3}{4}$ " square x 4" long. Make cuts with water coolant—like cutting tile. **NEVER** use coarse abrasive material for dressing, as this would damage the blade.

### No. 9501B MAKITA 4" GRINDER



This heavy duty grinder uses 4" dry cutting diamond blades for ceramic tile repair and incidental cuts. Preferred by some users for work on vertical surfaces, and its ability to cut all the way into corners. 10,000 rpm for fast cutting. Includes 2 wrenches, instruction manual, and steel carrying case. Double insulated and U.L. Listed for safety. Operates on 115V AC/DC. Brushes are externally accessible for easy checking. 1 year warranty. Tool weighs less than 5 lbs.

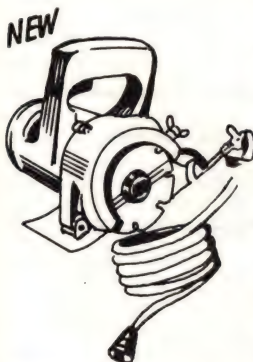

### No. 8210 JEPSON 4 $\frac{3}{8}$ " SAW

Features a water attachment for optional wet sawing! Water holds down dust, gives smoother cut, and extends life of 4" dry cutting blades. Water attachment includes a faucet adapter, 15' of vinyl tubing, water cock to regulate flow, and the water tip which sprays both sides of blade. This tool is good for flat work and cutting depth is adjustable up to 1 $\frac{3}{8}$ ". Can be used to degROUT floors. 11,000 rpm for fast cutting. Included are 2 wrenches, spare set of motor brushes, and instruction manual. Double insulated and U.L. Listed for safety. Operates on 115V AC/DC. Has a 20 mm arbor. 1 year warranty. Weighs under 6 lbs.

### 4-SEG-D 4" DIAMETER DRY CUTTING DIAMOND TILE BLADES

NEW

For use with the No. 8210 Saw and No. 9501B Grinder. All blades have a  $\frac{5}{8}$ " x 20 mm knockout bushing.

No. 4-T4-D—A continuous rim blade that provides smooth, chip free cutting.

No. 4-SEG-D—A fast cutting segmented blade for rough cutting where some edge chipping is tolerable.

No. 4-WR-D—A "Wavy Rim" blade with fast cutting performance, but less chipping than a segmented blade.



4-T4-D



4-T4-D (W) (D)

(W) For Use with Water (D) For Use without Water

### NEW No. 75912 4" GRINDING WHEEL




(D)

Silicon carbide grinding wheel is designed for use on ceramic tile and masonry. Can be used to make bull-nose tile from field tile, and for clean-up work on concrete slabs. Fits No. 9501B Grinder. Size is 4" x  $\frac{1}{4}$ " x  $\frac{5}{8}$ ".



## MIRACLE Hydra SPONGE—Sensationally Absorbent! Stays Soft and Pliable

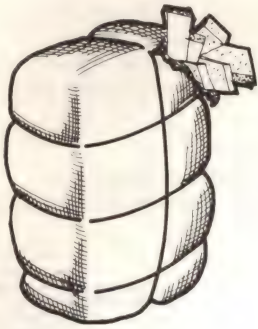

These **TOP QUALITY** sponges have all the advantages of the best natural sponges, but last much longer and are super absorbent. Have the comfortable rectangular shape with rounded edges and corners. Sold by the each or box quantities, and in economical bales. Compressed in a bale, sponges expand to full size when bale is opened.

Stock No. (For Each or Box Quantities ONLY)	Description	Size (")			Bale Quantity	NEW Stock No. (For Bale Quantities ONLY)
		L	W	H		
5-HS	Small	5¾	3¾	1¾	1000	5-HS-BALE
6-HS	Medium	6¼	4	2	750	6-HS-BALE
7-HS	Large	6½	4½	2½	600	7-HS-BALE
8-HS	Extra Large	7½	5½	2¾	400	8-HS-BALE



### No. 10FP WHITE PLASTIC FOAM SPONGE

Specially made for ceramic tile work. Can use with acids and chlorines. Cuts grout to a nice even finish without any sticking problem. Rectangular shaped, measures 7" x 4" x 2". Economically priced. Packed 10 per Bag, 10 Bags per box, and also available in case quantities of 45 Bags per Case.



### POLYURETHANE SPONGES

For those who prefer a rectangular shape with sharp square corners, here is a selection of 2 popular sizes. These absorbent synthetic natural color sponges are soft and pliable. They can be cleaned and reused, but can be considered "throwaway" because of their economical price.

No. 64—6" x 4" x 2" No. 74—8" x 5" x 2"

### STEEL MORTAR MIXING BOXES



These boxes are designed as light as adequate strength requirements permit. Then have curved radius ends. This permits a rolling type action while mixing. This type of end is also easier to scoop from—and much easier to clean. The top edges are channel formed for rigidity. Finished with rust preventive red oxide paint, they nest for compact storage. Dimensions shown below are approximate as measured at the inside top of the box.

- No. 00-MB —30" x 20" x 8", 2½ cu. ft., 22 lbs.
- No. 0-MB —48" x 23" x 8", 5 cu. ft., 40 lbs.
- No. 1-SP-MB—60" x 30" x 8", 8 cu. ft., 60 lbs.
- No. 1-MB —60" x 30" x 12", 12½ cu. ft., 88 lbs.

### CELLULOSE SPONGES



In the popular "turtle-back" and rectangular styles. Cellulose, a wood base product, is durable and more absorbent than plastic. The "turtle-back" holds its shape even when wet, and the rectangular has square sharp corners. These sponges can easily be washed clean, and they resist crumbling.

No. 730 "TURTLE-BACK"—7" x 3¾" x 2¼"

No. 731 "TURTLE-BACK"—7½" x 3¾" x 2¾"

No. 732 RECTANGULAR—7¼" x 4½" x 2"

NEW



### PLASTIC MORTAR MIXING BOXES

Made of durable polyethylene plastic, these boxes offer the convenience of lighter weight and consequent handling ease. Also, they are easier to clean as dried mortar can be loosened by tapping the outside of the box with a rubber mallet. Dimensions shown are approximate as measured at the inside top of the box.

No. MB-48—51" x 27" x 11", 6 cu. ft., 15 lbs.

No. MB-49—58" x 33" x 12", 10 cu. ft., 24 lbs.




### No. 580-MB PLASTIC MORTAR BOARD

Lightweight, and won't rot or rust, as do wood or steel boards. Measures 30" x 30" square, and has a ½" high lip all round. Weighs only 4 lbs.



No. 30-MS STAND—Sturdy angle iron construction. Adjusts to any height from 25" to 30". The chain is 26" long, and is a stout 320 lbs. test. It fits the keyhole slot for fast and easy adjustment. Weighs 15 lbs.

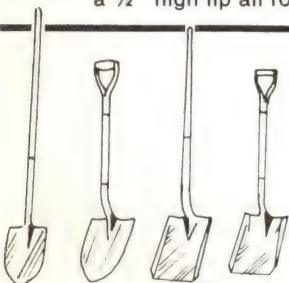

No. R248 No. R2UD No. S248 No. S2UD

### SHOVELS

Famous for quality, these shovels are forged from high-tensile special alloy steel, and are fully heat treated. Sockets are an extra long 11" in length. They are the only shovels with a "backbone" - it extends from the top of the socket to the tip of the cutting edge, and is 60% thicker than the sides. This means longer life and better balance. Handles are made from the best ash wood available, and have a clear lacquer finish.



### No. MM-9 MORTAR MIXING HOE

A top quality tool by the Union Fork and Hoe Co. The blade and shank are a one piece forging. Two 1¾" holes are provided in the blade to give the proper thorough mixing action. Blade measures 9" wide x 6" high. Ash wood handle is 66" long, and overall length is 69". Weighs 4½ lbs.

NEW

### No. 1115 PLASTIC GROUT MIXING PAIL



10 quart capacity pail is extremely pliable. Dried grout from the previous job can be readily broken out. Has a comfortable handle grip, and a strong rim that resists breakage from heavy loads. Also, has a wide spout for easy pouring of liquids. Brown color.

### FORTEX HEAVY DUTY BUCKETS



Practically  
Indestructible!

Excellent for thin set mortar mixing, "mud" carrying, grout mixing, etc. Molded from a tough rubber-fiber composition, they won't split, rust, dent, or leak. Will outlast metal buckets 10 to 1! They resist the effects of lime, acid, and other caustics. The heavy galvanized steel fittings are reinforced for extra strength. 3 Popular sizes.

No. N400-8—8 qt.

No. N200-10—10 qt.

No. N100-12—12 qt.



## No. M-60 MIXAL MIXER

Wet Mixing for Ceramic Tile Accessory Products and Dry Mixing for Seamless Flooring Products

Save time and effort with this motorized Mixer, and get a perfect mix every time! Mixes mortar, grout, and all cement type products thoroughly in less than 2 minutes. The paddle is scientifically designed to roll the mix towards the center and up from the bottom. Mixes 5 gallons per batch, and up to 8 cu. ft. per hour. Can be set at any of 4 mixes. Cheaper models do not have this exclusive and important adjustable settings feature. A 10 page booklet, giving all needed instructions and detailed information, is included with every mixer.

Operates anywhere, and needs no fastening down. Packed in a 5-gallon metal pail that becomes the mixing drum. Pail and paddle are removable so the mix can be carried where it is needed. Easy to clean - just swish pail and paddle in water. Supplied with the Regular No. "R" Paddle. Mixing speed of pail is 60 RPM. Built for continuous duty performance. All bearings have seals to keep out dust and dirt. Measures 12" x 18" x 24" high. The Mixer and Motor are priced and packed separately - and must be ordered separately. The No. M-60-511 Motor is 1/4 H.P., 110 Volt, with an 8' #18/3 cord attached.

### No. M-60-511 -

1/4 H.P. Motor only, with 18/3 wire, 8 ft. long cord attached.

Sold separately from Mixer.

**No. R-5 SLURRY PADDLE**—Available extra especially for mixing, blending, or stirring semi-fluid materials as Grouts, Adhesives, Plasters, Liquid Plastics, Paints, etc. Not for concrete. Can easily be adjusted to the best angle for the material involved. Breaks up lumps. Groove ring self aligns this paddle to properly scrape the inside of the mixing pail at all times.

## Jiffier MIXERS

These scientifically designed and patented Jiffier Mixers are absolutely the finest thing for rapid and thorough mixing of things like Ceramic Tile Thin Set Mortar, Epoxy Adhesives, Powder Type Floor Underlayments, Paint, Dry Wall Mud, Industrial Coatings, Waterproofing Materials, etc. You certainly

owe it to yourself to try one on your next mixing job. The unique 4-way counter-action gives fast and complete dispersion with no splash, and with no air or lumps in the mix. Makes mixing jobs a pleasure!


**No. 117** — Has two 2½" diameter wheels on a ¼" x 11" shaft.

**No. 121** — Has two 3½" diameter wheels on a ⅜" x 16" shaft. End of shaft is turned down to ¼", permitting either a ¼" or ⅜" drill to be used.

**No. 130** — Has two 5" diameter wheels on a ⅜" x 24" shaft. Wheel positions are adjustable. Has "No-Slip-In-Chuck" shaft end feature.

**No. 140** — Same as No. 130, except has three wheels — for faster mixing of larger batches. All models are made from corrosion resistant plated steel.

**NOTE:** Drills with reversible operation are recommended to make cleaning easier

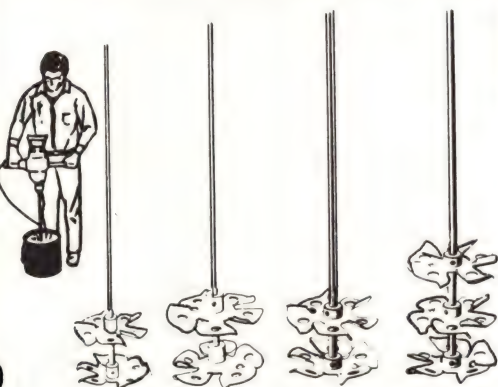

No. 117 No. 121 No. 130 No. 140

Upper wheels pull down, lower wheel cuts up, the holes and slots screen out the lumps.


## FAMOUS CHAPMAN MIXERS

(U.S. Patent Nos. 3,166,303 and 3,333,831)

These mixers feature a patented action that mixes all kinds of materials in much less time! This action forces material downward and outward (see sketch), and creates a perfect vortex — for effortless and efficient operation. Both models have the new "kicker bar" on the bottom. Some materials tend to stick to the bottom and corners of the container. But this feature easily flushes and circulates the entire contents — **without any lumps!** Furthermore, materials are easily mixed to an even consistency, without any dry pockets. Made from carbon steel, the blades are securely welded to the shaft, and are plated overall for rust protection.

**No. 60X** — ⅜" diameter shaft x 17" long

**No. 100X** — ½" diameter shaft x 30" long

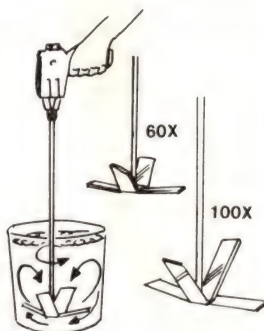


## No. MM420 MORTAR MOVER

Really helpful on large floor jobs! This handy tool does the work of several shovels as it spreads, grades, and smooths. Also can be used for terrazzo aggregates, concrete, etc. The cold rolled carbon steel blade is 4" wide x 20" long, and the handle is 54" long. Weighs 3½ lbs., and is value priced.



## No. MM30 MIXER

For thin set mortar, grout, and other powdered materials, this 30" overall length mixer can be used without stooping. Has sturdy all steel welded construction, and is completely plated for rust protection. The stiff, **SOLID 7/16"** hexagonal steel shaft won't bend from use in heavy mixes, nor slip in the drill chuck. Frame is 8¼" wide x 4¼" high, and blades are shaped to mix in an inside out pattern. This reduces air in the mix to a minimum. Weighs 2 lbs.

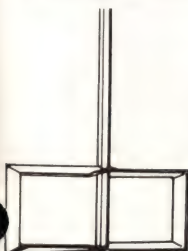

## No. 517 GROUT BAG, with METAL TIP

For Filling Joints in Tile, Brick, and Stone—on Floor and Wall Work

This cone shaped heavy gauge vinyl bag is a virtual must for easy and efficient grouting work. Great for small or large jobs. It is 12" wide at the top and 22" long, and holds as much grout as the user would want to carry at one time. The chrome plated conical tip is 1½" diam. at the top, and the dispensing end is ⅜" diam. Can easily be removed for cleaning. This unit is reasonably priced.







## EXACT MASTER PROFESSIONAL LEVELS



*Reinforced Aluminum I-Beam and Mahogany Construction—  
Absolutely the best Levels available for the Tilesetter*


You get built-in warpage resistance with this marriage of mahogany and aluminum. This is a premium level well worth the extra cost. The full width aluminum edges are precision ground and

**No. MPO24**—24" Long with Open Handgrips  
**No. MPO30**—30" Long with Open Handgrips  
**No. MPO42**—42" Long with Open Handgrips

parallel. The select, fine grain mahogany is permanently bonded to the metal to form a strong solid unit. Has 6 tough clear pyrex vials set in shock absorbing vial holders. 1" wide x 2 1/4" high.

**No. MPO48**—48" Long with Open Handgrips  
**No. MP48**—48" Long with Hand Grooves  
**No. MPO72**—72" Long with Open Handgrips

### EXACT BRASS BOUND MAHOGANY MASON'S LEVELS



Made from top quality carefully selected kiln dried lumber, and finished with a durable coat of spar varnish. Has a double angle brass binding that will not come loose, and brass end plates. The permanently black lined clear liquid vials are set in shock resistant units. Strong protective glass windows protect the vials from dirt and damage. All lengths have 6 vials. The 18" length has finger grooves, and the others have open hand grips. 1 1/4" wide x 2 1/4" high.

**No. 018BB**—18" **No. 024BB**—24" **No. 048BB**—48"

### EXACT ALUMINUM LEVELS



Made from a rigid aluminum alloy casting. This type of construction distributes the metal for maximum strength. Edges are accurately machined and parallel. All sizes, except the 18", have 6 colored liquid vials. One edge is ruled with white markings on a black background on all lengths, except the 48". These levels cannot warp!

**No. A18**—18"  
**No. A246**—24"

**No. A286**—28"  
**No. EP48**—48"

### 8" DUSTER BRUSHES



All models have a 14" long beavertail style lacquered hardwood block. The Nos. 61-TB and 2618 have a 2 1/2" trim depth. The No. 2638 has a 2 1/4" trim depth.

#### No. 61-TB TILE BRUSH—

Has special plastic bristles with "exploded tips" for fast cleaning of dried grout film from ceramic tile. Leaves a bright polished appearance on glazed tile.

**No. 2618 BLACK BEAUTY**—A top quality model for absolute best results. Has a 100% black horsehair fill!

**No. 2638 GLEAM**—An economical model that gives good service. Has blended fill of black horsehair and plastic bristles.

### CANARY BRUSHES



Filled with acid resistant yellow algil plastic bristles. A good general purpose brush. Brush face is 6" x 5" and the trim depth is 2"

**No. 5001**—8" Canary  
**No. 5041**—20" Canary



#### No. 4620 JUMBO BRUSH


A heavily filled water brush with 5 rows of white tampico fibre. The hardwood block is clear lacquered, and is 6 1/2" wide. Trim depth is 4"

### SUN PALMYRA BRUSHES



Has economical natural palmyra bristles. Good for cleaning tools and grout pails. Brush face is 6" x 5" and the trim depth is 2"

**No. 5005**—8" Sun Palmyra  
**No. 5045**—20" Sun Palmyra

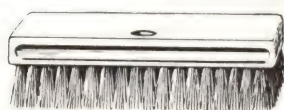

#### No. 4585 ACID FLOOR SCRUB BRUSH


Clean floors easily from standing position. Handle removes for tight areas where hand work is necessary. Acid resistant natural Tampico fibre. Hardwood block is 8 1/4" x 3" has a tapered handle hole, and trim depth is 1 1/4"

The **No. 0760 Handle** is sold separately. It is 1 5/16" diameter x 60" long with a tapered end.



#### No. 2425 SCRUB BRUSH

Like the old "Twinkle," this brush has a comfortable molded plastic block having contoured finger grips. Fill is acid resistant crimped white polypropylene. Block is 9 1/4" x 2 3/8" and trim depth is 1 1/8"

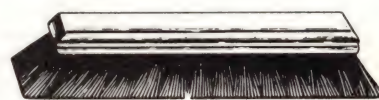

#### No. 2466 HIPPO SCRUB BRUSH

Has a waxed hardwood block with acid resistant crimped white polypropylene fill. The block is 8" x 2 3/4" The flared style brush face is 9" long, and the trim depth is 1 1/4"



### CORN BROOMS

*Made of 100% Natural Corn Fiber*

**NEW**

**No. 1070 HEAVY DUTY**—Finest quality broom corn is handcrafted into this long wearing broom. Extra strength construction includes a wire band reinforcement and four sewn nylon bands. Heavy duty varnished handle is 1 1/8" diameter x 42" long. Has a 13" flare and a 17" trim.

**No. 1074 STANDARD DUTY**—Broom corn fiber and five sewn nylon reinforcement for good, economical service. Red, painted handle is 1 1/16" diameter x 40" long. Has a 12" flare and a 15" trim.



#### No. 810 DUST PAN



Thin angled lip for easier dust pick up. Heavy gauge steel, pan is reinforced by corrugated ribs for strength. Rust resistant enamel, 12" wide.



#### No. 45 WHISK BROOM

Top quality corn straw for long economical service. Has 8" bristles, 6" wide, and 10" long overall.






## No. 5-10 ADJUSTABLE CERAMIC TILE HOLE BORER

Cuts holes from 1 1/4" to 2 1/4" diameter. Simply loosen a lock nut to adjust hole size. Has a three sided 3/8" shank for slip proof work. Can be mounted on a tile cutter (1/4" bar, maximum thickness) or used freehand without the mounting piece. Pilot drill and cutting blade are both carbide tipped, and can be sharpened with a No. CJT63 Hone. Not for use on marble, very hard tile, or material thicker than 1/2".

## No. 4-HBV HOLE BREAKER VISE

Eliminates the unsightly extra joints around water pipes caused by the old fashioned "split tile-half hole" method. Makes water-proofing easier and better too. The cast iron frame has 2 adjustable jaws that hold a tile under pressure (to avoid fracturing the glaze), while the hole is made with a tile hammer. Holes can be made from 1/2" to 3" diameter. Also "U" and "L" shaped cuts can be made. For 4" and 4 1/4" tile. Instructions included.



## CERAMIC TILE CHISELS & SCRIBE

**CARBIDE TIPPED CHISELS** — stay sharp longer. Specially designed for removing tile - no other use. Shaped to prevent damage to adjacent tiles. All 3 sizes 6" long. Superior brand - **Not guaranteed due to possible abuse.**

No. 61 — 1/4"

No. 62 — 3/8"

No. 63 — 1/2"

**TEMPERED STEEL CHISELS**—more economical to buy. Give good service, and can be sharpened. Available in 2 sizes.

No. 712 — 3/8" bit x 8" long

No. 713 — 1/2" bit x 8" long

**No. 69 CARBIDE TIPPED SCRIBE**—1/4" size x 6" long. For precision marking on glazed and unglazed surfaces with a sharp "pencil" point. **NOT GUARANTEED**, as can be abused or misused.



## TILE HAMMERS

**No. 377**—Has a top quality 4 oz. tempered tool steel head. The heel is square with all edges sharp, and along with the sharpened bit end accurate work is possible. Has a durable hickory handle that is smooth and delicately balanced.

**No. 677**—Bricklayers style for harder body and thicker tiles. Has a 12 oz. Tool Steel head. The thin shaped bit can easily be sharpened.

**Carbide Tipped** - Stay sharp longer, especially when used on harder tile. For use on tile only - no other materials. Superior brand - **Not guaranteed due to possible abuse.**

**No. 377-1** — Carbide Tipped Heel and Cutting Bit

**No. 377-2** — Carbide Tipped Heel only

**No. 377-3** — Carbide Tipped Cutting Bit only



Heel Bit

## No. CJT63 HONE



Sharpens carbide tipped tools of any kind. Keep your tools in top working order. 4" x 3/4" x 3/8" size, in a coarse, fast cutting grit.



No. BFH-6



No. 211 - No. 223 - No. 422

**No. BFH-6**—Fluted cutting surface. For levelling spots on concrete and masonry work before setting tile on mastic jobs. Fast cutting No. 20 Grit. 6" x 3" x 1".


**No. 211**—For smoothing cut pieces of tile for better appearing joints. Choice of No. 30 or No. 46 coarse Grits, and No. 60 or No. 80 fine Grits. 6" x 2" x 1".

**No. 223**—A silicon carbide Rub 8" x 3" x 1" in No. 54 Grit. Rapidly becoming popular with many Tile Setters.

**No. 422**—Double faced Rub, 6" x 2" x 1". Has No. 60 Grit on one side for dressing the clay biscuit, and No. 90 Grit on the other side for smooth finishing of the glaze. This has long been a popular item.

## No. 18-TD MONTOLIT TILE DRILL

NEW

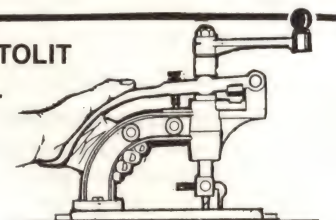


Will cut holes in tile from 3/4" to 3 3/4" diameter. Centered holes can be bored in tile as large as 12" x 12". To use, cut from the back of the tile to within about 1/32" of the face. Slug is then chipped out from the face, leaving a clean and round hole. For added stability during use, mounting holes are provided for fastening the tool to a board. Also, to prevent tile from turning during cutting, 3 peg holes are provided on the cutting table. Cutting Bit and Pilot Drill are carbide tipped for long life. Maximum tile thickness is 1/2". Not for use on very hard materials. Supplied with Pilot Drill, Chipping Hammer, Cutting Bits (2), and illustrated instructions. Weighs 6 lbs.

**No. 236**—Replacement Cutting Bit

**No. 237**—Replacement Pilot Drill

## No. 356 CERAMIC TILE HOLE SAW

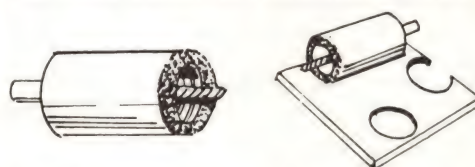

Cuts 1 1/2" diameter holes in ceramic wall tile. Just the right size for water outlet pipes. The cutting edge is rimmed with tungsten carbide grit for long wear and clean cuts. A strong compression spring automatically ejects the cut-out piece. The 3/8" diameter shank holds the replaceable 1/4" carbide tipped pilot drill. Saves time, is easy to use, and makes better looking jobs. Weighs only 9 ounces, and is economically priced.

**No. 221**—Replacement Pilot Drill

## No. 79 AUTOMATIC CENTER PUNCH

The easy way to puncture the glaze on ceramic wall tile. Permits greater accuracy for hole location, with no danger of tile breakage. Simply press down on this tool, and an enclosed spring does the work! Spring pressure can be adjusted for the desired force. Can be used on other materials, too.

**No. 79-P** — Replacement Point



## RUB BRICKS FOR CERAMIC TILE



No. 444

A round style double faced rub brick. It is 4" in diameter, and is 1" thick. Like the No. 422, it has No. 60 Grit on 1 side, and No. 90 Grit on the other side. The chief advantage of this style is the evenness of wear that naturally occurs



## GROUTING FLOATS — FOR CERAMIC WALLS AND FLOORS



### No. 103 GROUTING FLOAT

Has a firm, black molded sponge rubber pad with a closed face. Dried grout can't ruin pad. Fast working, and insures complete filling of tile joints for watertight installations without scratching the tile. Size: 4" x 9½" x ¾"

No. 103-RP—Replacement Rubber Pad



### PREMIUM QUALITY GROUTING FLOATS

These models feature a pure gum rubber face for longer wear. The gum rubber face is bonded to a dense foam rubber back, which is cemented to an aluminum backing. One end has both corners rounded. For use on walls and floors. Has a smooth wood handle.

No. 43—4" x 9½" x ¾"

No. 43-XL—4" x 12" x ¾" **NEW**



### No. GK-1 "GROUT KING" FLOAT

Made of green hard rubber, the long wearing pad of this float removes excess grout better than other available floats. Works especially well with stiff epoxy grouts, and can be used with sanded grouts. Rubber edges can be reground to maintain original sharp edge. Plastic handle. Size: 4" x 10½" x 5/8"



### No. 109 EPOXY FLOAT

Has an extra firm red rubber face for use with epoxy grouts. The rubber face is bonded to a medium stiff pad for proper resiliency. Size: 4" x 9½" x ¾"



### No. 3516 MAHOGANY FLOAT

Preferred by many tile setters for troweling mortar. Has full sized comfortable offset handle. Long wearing mahogany will outlast redwood. Size: 3½" x 16" x ½"




### No. 177A DO-IT-YOURSELF FLOAT

For over-the-counter sales. Has a firm, black molded sponge rubber pad with a closed face. Steel shank is spot welded to the steel backing. Size: 3" x 7" x ½" 10 per box.

### FLOOR TILE CLEANING SQUEEGEES



No. FSC-24—24" Curved

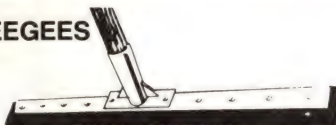

No. FSH-24—24" Straight

Both models have neoprene oil resistant rubber blades. They are ¼" thick x 2" high, and are securely held by angle and flat aluminum with 11 screws. The 54" long handle force fits into a sturdy cast aluminum socket.

No. FSQ-54H—Handle only for Floor Squeegees. Order separately.

### WALL TILE CLEANING SQUEEGEES



No. SQ-10—10" Wide Blade

No. SQ-12—12" Wide Blade

Best tool there is for excess grout removal. The one piece blade is 1½" heavy extruded rubber.

## MASONRY ANCHORS



### HOLLOW WALL ANCHORS ("Molly" Type)

Rust Proof Plated, For Fastening Fixtures to All Types Hollow Construction, Fixture May Be Removed and Replaced, Wrenches Furnished in Each Package at No Extra Charge.

No. 2101—½" Screw (For ⅛" to ⅝" Wall Thickness)  
(Use ⅝" Drill)

Packed 100 per Box



### TOGGLE BOLTS

Two-Wing Spring Type, Rust Proof Plated, and furnished with Mushroom Head Screws.

No. 4023 — 1/8" x 2" (Use ⅜" Drill)

No. 4033 — 1/8" x 3" (Use ⅜" Drill)

Packed 50 per Box

### FIBRE SCREW ANCHORS ("Rawlplug" Type)



No. 9026—1" Long (for #10 Screw)  
(Use ⅜" Drill)

No. 9039—1" Long (for #12 Screw)  
(Use ¼" Drill)

Packed 100 per Box

### LEAD SCREW ANCHORS



No. 9414—  
1" Long (for #6  
or #8 Screws)  
(Use ¼" Drill)

Packed 100 per Box



### PLASTIC SCREW ANCHORS

No. 7559—¾" Long (for #6 or #8 Screws)  
(Use ⅜" Drill)

No. 7569—7/8" Long (for #8 or #10 Screws)  
(Use ⅜" Drill)

No. 7579—1" Long (for #10 or #12 Screws)  
(Use ¼" Drill)

Packed 100 per Box

## INDUSTRIAL QUALITY EXTENSION CORDS

### All 3-Wire Grounded Safety Models


Protect your power tools and electric motors from damage by using these heavy duty cords that supply sufficient amperage! These cords have tough flexible vinyl jackets that resist moisture, oil, grease, acids, and abrasion. The moulded on connectors are moisture resistant and unbreakable. Don't confuse these cords with less expensive models that can harm your valuable equipment.

Stock No.	Length	Wire	Jacket	Max. Amps.
626**	50 ft.	#14/3	Orange-Round	15
627**	100 ft.	#14/3	Orange-Round	13
838*	50 ft.	#12/3	Orange-Flat	15
839*	100 ft.	#12/3	Orange-Flat	15

\*\*UL Listed, and meets OSHA Indoor/Outdoor requirements.

\*UL Listed, and meets OSHA Indoor requirements.

## HEAVY DUTY TROUBLE EXTENSION LAMPS

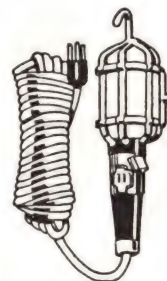


These meet OSHA requirements for general indoor/outdoor use. Not intended though for hazardous or explosive locations. Both have 3-wire safety cord, a push through switch, and side outlets. Uses a 75W bulb, or less. The neoprene cord remains flexible under extreme cold conditions. Don't gamble with your safety by using cheaper models that fail to meet OSHA standards!

Stock No.	Length	Wire	Max. Amps.*
681	25 ft.	18/3	10
692	50 ft.	16/3	13

\*Rating includes the light bulb.

SEE OTHER  
EXTENSION  
CORDS ON  
PAGE 27.

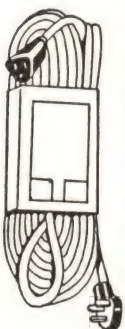



## DIAMOND METAL CUTTING SNIPS



4-sizes—Straight Pattern



3 sizes—Circular Pattern

Stock No.	Overall Length	Cutting Length
DS7	7"	1 3/4"
DS10	10"	2 1/4"
DS12	12 3/4"	3"
DS14	14 3/4"	4"
DC7	7"	1 3/4"
DC10	10"	2 3/4"
DC12	12 3/4"	3"

See Page 29 for Aviation Snips

**Chromium Plated for Permanent Rust Protection**  
Made from special analysis tool steel. Heat treated and tempered all over for extreme toughness. Cutting edges electronically hardened to make them exceptionally long wearing. Steel bolt is oversize adding strength to the joint. Close screw adjustment for setting blades along with large locking nut lessens need for readjustment. Very smooth cutting action on all kinds of sheet metal including wire screen and metal lath.

### LIGHTWEIGHT "ANDY" TIN SNIPS—featuring Replacement Blades



These popular snips have sturdy heat treated aluminum alloy frames and precision ground tool steel blades. Less tiring to use—weigh ONLY half as much as regular snips! Exclusive blade design gives more leverage, and the natural contour hand grips prevent blisters. Blade tips extend slightly beyond the frame, and can penetrate small openings in lath to cut small circles for pipe fitting work. Available in 2 sizes. Installation instructions and tools are supplied with replacement blades.

Snips Stock No.	Overall Length	Length of Cut	Repl. Blade Stock No.
M-12	12"	3"	M-12RB
M-14	14"	3 1/2"	M-14RB

### WISS INLAID BLADE TIN SNIPS



REGULAR PATTERN

Stock No.	Overall Length	Cutting Length
W10	11 1/2"	2 1/2"
W9	12 1/2"	3"
W7	14 1/2"	4"

These snips are of two-piece construction. To the hot drop forged blades, a high carbon cutlery steel inlay is welded along the full face of each blade. This provides an extra hard retentive cutting edge throughout the full life of the snips, and creates incomparable ruggedness, durability, and efficiency.

#### MARGIN TROWELS



No. 54—Marshalltown 5" x 1 1/2"  
No. 52—Marshalltown 5" x 2"  
No. 56—Marshalltown 6" x 2"  
No. 82—Economy 8" x 2"  
No. IMP13—Import 5" x 1 1/2"  
No. IMP12—Import 5" x 2"

#### GAUGING TROWELS



No. 48—Marshalltown 7" x 3 3/8"

#### TILE SETTERS TROWELS



No. 57—Marshalltown 7" x 4 3/8"  
No. IMP27—Import 7" x 4 3/8"

#### POINTING TROWELS



No. 45-5—Marshalltown 5"  
No. 45-6—Marshalltown 6"  
No. 45-7—Marshalltown 7"  
No. IMP11—Import 5 1/2"  
No. IMP7—Import 7"

### SWIMMING POOL TROWELS



Both ends are completely rounded for easy cove finishing work. Available in either bright high carbon spring steel, or flexible blue steel. All trowels have a Camel Back handle.

Stock No.	Size	Stock No.
(Carbon Spring Steel)		(Blue Steel)
SP10	3" x 10"	SP10-BS
SP12	3 1/2" x 12"	SP12-BS
SP14	4" x 14"	SP14-BS
SP16	4" x 16"	SP16-BS
SP18	5" x 18"	


### PROFESSIONAL QUALITY FINISHING TROWELS

All with Camel Back Handle



MARSHALLTOWN:  
No. MXS91—4 1/2" x 10 1/2"  
No. MXS4—4 3/4" x 11 1/2"  
GUNDLACH:  
No. 9PC—4 1/2" x 11 1/2"

See Page 42 for Cement Finishing Trowels



### ALUMINUM HAWKS

All Hawks are supplied with a wood handle and a sponge rubber callous preventer.

No. 1—13" x 13"  
No. 73—13 1/2" x 13 1/2"  
No. 139—12" x 12"

### WIRE BRUSHES **NEW**

Used for cleaning of trowels, concrete slabs, and backs of tile. Tempered steel wire is trimmed to 1" Nos. 1640 and 1649 have 4 x 16 rows of wire. No. 1930 has 3 x 19 rows of wire. All have a hangup hole.



No. 1640 SHOE HANDLE—Provides strong grip for applying pressure. 7/8" x 5" brush with 1 1/8" x 10" hardwood handle.



No. 1649 SHOE HANDLE W/ SCRAPER—Same as No. 1640, but with handy scraper.



No. 1930 CURVED LONG HANDLE—5/8" x 6" brush with 1" x 13 3/4" curved hardwood handle.

### CANVAS TOOL BAGS

These bags have a strong steel frame. Heavy white army duck is used. Both models have a waterproof fibreboard bottom, and a large 9" x 11" inside pocket. Handles, buckles, billets, and canvas are riveted to the frame, with lock stitch sewing. Both models are 7" wide x 20" long x 16" deep. The No. M-304 has a leather bottom, and 3" high leather side reinforcing.



No. M-302




No. M-304



## No. 20 ALUMINUM STRAIGHT EDGE SET

Set consists of 5 pieces, one each of the following lengths: 6 ft., 4 ft. 10 in., 4 ft., 3 ft., and 2 ft.

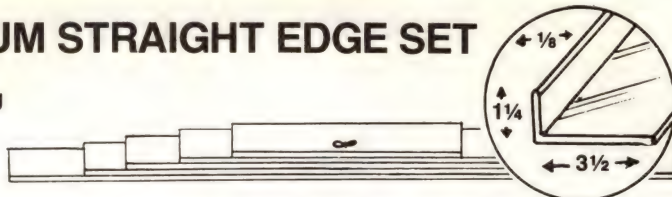

Used as screeds for ceramic tile mortar installation work, these are claimed by many tile setters to be the greatest tool to come along since the trowel. The angle type construction makes them strong and rigid—they will not warp and will maintain their original straightness. Yet they are extremely lightweight, and this dras-

tically reduces fatigue. They are exceptionally easy to handle, and cannot rust, rot, or mildew. They nest for compact storage, and 1 screw and wing nut are provided to bind them together. The complete set weighs only 13 1/4 lbs!

This aluminum angle material is also available in single individual lengths as follows:

No. 20-6—6 ft. long


No. 20-8—8 ft. long

No. 20-10—10 ft. long

No. 20-12—12 ft. long

No. 20-14—14 ft. long

No. 20-16—16 ft. long

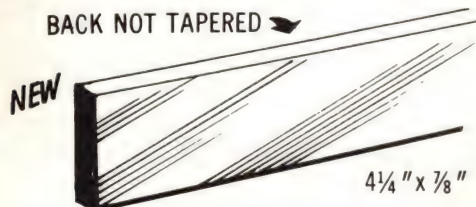

## MAGNESIUM STRAIGHT EDGES

**Now Available From Our Belleville, IL Plant!!**

These screeds are exceptionally lightweight, and will not warp or rot like wood tools will. They have reinforced construction to maintain their original straightness.

Available from our stock in the 9 lengths shown below, these tools can now be combined with shipment of other goods from our Belleville, IL plant. Also, any length not already stocked (starting at 2 ft. and going up to 16 ft. in 1/2 ft. increments) is available on a special order basis.

No. MSE-4—4 ft. long

No. MSE-5—5 ft. long

No. MSE-6—6 ft. long

No. MSE-7 — 7 ft. long

No. MSE-8 — 8 ft. long

No. MSE-10—10 ft. long

No. MSE-12—12 ft. long

No. MSE-14—14 ft. long


No. MSE-16—16 ft. long

**NOTE:** 8 ft. and longer Magnesium Straight Edges **MUST** be shipped via motor freight as they exceed the United Parcel Service maximum size limitation.

7 ft. and shorter Magnesium Straight Edges can be shipped via United Parcel Service.

## No. 6473 DOODLEBUG

**An Ideal Grout Cleaning Tool!**

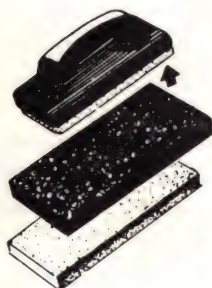

Cleans all types of grout films, **including** tough epoxy films, from tile **without** damaging the grout joint. Cleaning pads attach to the comfortable plastic holder. To clean the pads, simply pull off and rinse in water. Can also be used to clean swimming pools, shower areas, etc. Cleaning pads are available in fine (white), medium (blue), and coarse (brown). Pads are 4 5/8" wide x 10" long x 3/4" thick. A white and a blue pad are supplied with each Doodlebug.

**Replacement Cleaning Pads:**

No. 8440—White

No. 8242—Blue

**NEW**  
No. 8541—Brown



## No. CCH-10 CHEESECLOTH

Widely used for ceramic tile clean-up work. Unbleached for greater strength. Sold by the pound in net 10 lb. cartons. Material is 1 yd. wide, by random 3 ft.—30 ft. lengths.



## No. 707 DU BARRY LATEX RUBBER GLOVES

Preferred by many tile setters, these gloves are pliable but super tough. Long wearing, they have a non-slip textured surface in the hand area, and are flock lined for easy On/Off. 14" long—allows for cuffing to catch drips. Economically priced too! Orange color.

No. 707-S —Small

No. 707-L —Large

No. 707-M—Medium

No. 707-XL—Extra Large



## No. N-35 NEOPRENE RUBBER GLOVES

Made from milled neoprene to withstand acids and other caustics that would ruin ordinary gloves. Exclusive non-slip grip holds slippery wet things as if they were dry. .015" gauge gloves have curved finger design for maximum comfort and dexterity. Rolled cuff catches drips. 10 1/2" length. Black color.

No. N-35-8 —Size 8 (Small)

No. N-35-9 —Size 9 (Medium)

No. N-35-10—Size 10 (Large)

No. N-35-11—Size 11 (Extra Large)

## TILE SETTERS TWINE



No. TW-12  
1/2 lb. Ball



No. TW-212  
2 1/2 lb. Cone

This is top quality white cotton twine in the very popular 16-ply strength. Available, as shown at left, in both 1/2 lb. Balls and 2 1/2 lb. Cones.

## No. P600 PLASTIC GROUT STRIKER



Economically priced—this dandy little tool should be in every tile setter's tool box. Is 6" long overall. Sold only by the Dozen.

## No. 516 STEEL TILE STRIKER



Just the right 5/16" cut for tile joints, and will not mar the glazed tile surface.



## PRECISION BRAND TILE SPACERS

**This is the top quality brand!**

**NEW**

You set tile faster and more precisely without special tools! Use with tile without lugs! Hold tiles in place until set—for uniform installation. Accurately cut—no tails or fins will show above the surface. Rounded edges facilitate setting the tile. Not necessary to remove for grouting. The close tolerances insure precise tile alignment. Available in bag quantities, and also bulk packed in economical box quantities.



TSX Series



TST Series



TSY Series



No. 5858 WEDGE


## HELPFUL HINTS FOR TILE SPACER SELECTION

1. Tile spacer thickness should **not** exceed half the thickness of the tile. The use of a spacer which is too thick may cause hydration problems (uneven grout coloration) and/or grout failure.
2. Non-sanded dry grout should be used with  $\frac{1}{16}$ " and  $\frac{3}{32}$ " wide spacers. Sanded grout should be used with  $\frac{1}{8}$ " wide and larger spacers.

### SPACERS NEEDED PER SQUARE FOOT


TSX Series	TST Series	TSY Series
4" x 4"—9	4" x 6"—6	4" Hex—9
6" x 6"—4	4" x 8"—5	6" Hex—4
8" x 8"—3	6" x 8"—3	8" Hex—3
12" x 12"—2		

SJ—Straight Joint

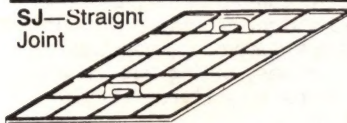

6 x 6 Plastic Racks set 20 tile  
6 x 6 Metal Racks set 24 tile

SJ—Straight Joint




8 x 8 Racks set 12 tile

RB—Running Bond



4 x 8 Racks set 24 tile

HB—Herringbone

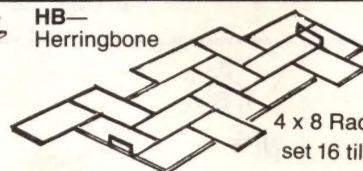

4 x 8 Racks set 16 tile

## TILE RACKS—PLASTIC AND METAL

For D-I-Y and professional tile setters. Plastic racks are economical, easy to clean, and can't rust. Zinc plated metal racks are durable, stiffer, and easier to lift out of the setting bed. Both metal and plastic racks have "legs." Legs keep the rails cleaner by raising the rack out of the setting bed. Plastic rack

legs are molded in, while metal rack legs are supplied for optional use. For proper rack selection, the opening should be  $\frac{1}{16}$ " larger (length and width) than the tile size. Metal racks, and all green plastic racks, have  $\frac{3}{16}$ " wide rails for a nominal  $\frac{1}{4}$ " grout joint. Other plastic racks have  $\frac{1}{4}$ " wide rails for a nominal  $\frac{5}{16}$ " grout joint.


## PLASTIC TILE RACKS

Stock No.	Size	Color	Type	Opening ("")
66RSJ-P	6 x 6	Red	SJ	$6\frac{5}{32} \times 6\frac{5}{32}$
66GSJ-P	6 x 6	Green	SJ	$6\frac{1}{16} \times 6\frac{1}{16}$
88RSJ-P	8 x 8	Red	SJ	$8\frac{1}{32} \times 8\frac{1}{32}$
88GSJ-P	8 x 8	Green	SJ	$7\frac{15}{16} \times 7\frac{15}{16}$
88YSJ-P	8 x 8	Yellow	SJ	$7\frac{1}{8} \times 7\frac{1}{8}$
88BSJ-P	8 x 8	Brown	SJ	$7\frac{3}{4} \times 7\frac{3}{4}$
48RRB-P	4 x 8	Red	RB	$3\frac{15}{16} \times 8\frac{1}{8}$
48GRB-P	4 x 8	Green	RB	$3\frac{15}{16} \times 8\frac{1}{32}$
48YRB-P	4 x 8	Yellow	RB	$3\frac{7}{8} \times 7\frac{7}{8}$
48BRB-P	4 x 8	Brown	RB	$3\frac{7}{8} \times 7\frac{1}{16}$
48HRB-P	4 x 8	Red	HB	$3\frac{15}{16} \times 8\frac{1}{8}$

## METAL TILE RACKS

Stock No.	Size	Color	Type	Opening ("")
66RSJ-M	6 x 6	Red	SJ	$6\frac{5}{64} \times 6\frac{5}{64}$
66GSJ-M	6 x 6	Green	SJ	$6 \times 6$
88RSJ-M	8 x 8	Red	SJ	$8\frac{5}{32} \times 8\frac{5}{32}$
88GSJ-M	8 x 8	Green	SJ	$8\frac{1}{16} \times 8\frac{1}{16}$
88YSJ-M	8 x 8	Yellow	SJ	$7\frac{31}{32} \times 7\frac{31}{32}$
88BSJ-M	8 x 8	Brown	SJ	$7\frac{7}{8} \times 7\frac{7}{8}$
48RRB-M	4 x 8	Red	RB	$3\frac{31}{32} \times 8\frac{5}{64}$
48GRB-M	4 x 8	Green	RB	$4 \times 8\frac{1}{64}$
48YRB-M	4 x 8	Yellow	RB	$3\frac{29}{32} \times 7\frac{59}{64}$

**NEW**



## HARDWOOD BEATING BLOCKS

Made from a solid piece of smooth, kiln dried, hard maple treated to prevent moisture damage. Finger grooves run along the length, and one end has a 45° mitre for corner work. Available with  $\frac{1}{8}$ " thick hard rubber on bottom to prevent damage to tile. Also, the rubber creates friction to allow shifting of tiles by tapping the block on the sides or ends. This tile setter's trick is hard to do with thinner blocks. Size:  $4\frac{1}{4}$ " W x 12" L x  $1\frac{3}{4}$ " H.

No. 414—Plain No. 414-HRB—w/Hard Rubber




## No. 5510 BEATING BLOCK

This economical Block, molded from hard durable plastic, won't split or warp. Use with a rubber mallet. It is  $5\frac{1}{2}$ " wide x 10" long x  $\frac{5}{8}$ " thick, and one end has a 45° mitre for corner work.

## No. 2150SS HOT WATER HEATER


A portable heater ideal for on the job use. At normal room temperature, heats a gallon of water in 10 minutes. 1150 Watt heating capacity, draws 10 Amps, 6 ft. long grounded cord. U.L. Listed for safety. Operating Instructions include a Limited Warranty. Operation in anything but clean, clear water constitutes misuse, and the warranty becomes void.

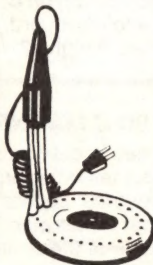

## CAULKING GUNS FOR SPOUTED CARTRIDGES

Contractor grade guns feature rugged steel construction for rough handling and hard use. Slotted front cap design makes loading fast and easy. End cap prevents cartridge shifting. Both have non-slip two-dog ratchet-drive ram rod. Barrels are ribbed for extra strength. The trigger and fitted grip provide a smooth bead.

No. ER-3S—For  $\frac{1}{10}$ th Gallon Cartridges  
No. L-2S —For 1 Quart Cartridges



## No. 3825 VACUUM LIFTER



$\frac{3}{4}$ " Cup

Use these "suction cups" to install tile faster. Also use to remove tiles to check for mastic coverage. Has holding power release buttons.

## No. 1620-C MECHANICAL PENCIL

Ideal for marking ceramic tile. Easily wiped off. Supplied with red lead.

REPLACEMENT LEAD—6 per Pkg.

No. 162R—Red No. 162B—Black






## TILE AND GROUT ROUTERS

Makes light work out of the tough and tedious job of grout removal! Can degROUT 2 square feet of standard wall tile per minute. Can also be used to cut holes and irregular shapes in softer wall tiles. Best results are obtained when used with the No. 275 Dremel Moto-Tool. Made of solid carbide, routers have long life and degROUT without damaging tile. Supplied with a list of operating tips.

- No. TGR-2**— $\frac{1}{16}$ " Router—Standard for degROUTing glazed wall tile  
**No. TGR-3**— $\frac{3}{32}$ " Router—For wide grout joints and tile cutting  
**No. TGR-4**— $\frac{1}{8}$ " Router—For widest grout joints and heavy cutting



1/16" router degROUTing tile.




1/8" router cutting holes and slotting tile.

## No. GS50 GROUT JOINT SAW

For removing ceramic wall tile grout. Features a replaceable  $2\frac{1}{2}$ " long blade that is tipped with tungsten carbide grit for fast cutting and long life. Has a comfortable plastic handle. Tool is  $8\frac{1}{2}$ " long overall, and weighs 5 oz.

**No. GS50-RB**—Replacement Blade, 2 per Card

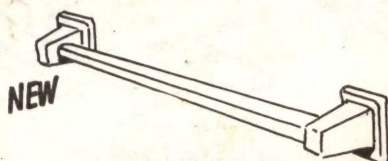


## REPLACE-A-BAR TOWEL BARS

*Fits any Standard Ceramic Bracket*

Replace chipped, discolored, or broken towel bars in minutes **without** removing the ceramic holding bracket from the tile! The patented Replace-A-Bar has spring loaded end caps that hold it firmly in place. Made of high impact, heavy gauge polystyrene, it will not discolor, tarnish, mildew, or corrode. Easy to cut to any desired length. Available in 2 lengths, in white and clear.

**No. 2024-C**—24", Clear  
**No. 2024-W**—24", White


**No. 2036-C**—36", Clear  
**No. 2036-W**—36", White

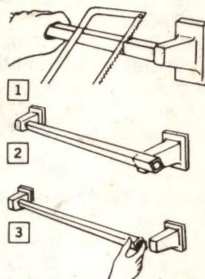

## EASY 3 STEP INSTALLATION

1. Saw old bar in two and remove from brackets.
2. Firmly press end of Replace-A-Bar into bracket to compress spring in the end cap. Measure and mark free end of bar to allow flange of other end cap to just slide by bracket into hole. Remove end cap and cut bar at mark with fine tooth saw.
3. Reinsert end cap. Compress and insert bar in brackets. It will now center and remain firmly in place.

**NEW**

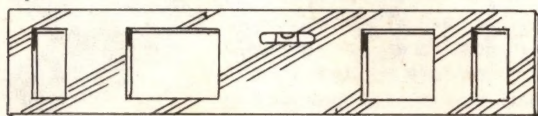

## No. 526 EZ MARKING GUIDE

Used to mark walls for quick and accurate location of ceramic fixtures outside of tile areas. Fixtures such as towel bars, paper holders, soap dishes, and toothbrush and tumbler holders can now be correctly located without the use of a separate level and measuring tape. Made from clear acrylic plastic, this lightweight marking guide has a built in acrylic vial to insure a level installation. Overall dimensions are  $6" \times 29\frac{1}{2}" \times \frac{1}{4}"$  thick, and weighs only 1 lb.




## MASKING TAPE

A general purpose first quality tape. Rolls are 60 yds. long, with a choice of  $\frac{3}{4}"$ ,  $1"$ ,  $1\frac{1}{2}"$ , and  $2"$  widths.

**No. MT-3/4**— $\frac{3}{4}"$  wide  
**No. MT-1**— $1"$  wide

**No. MT-1-1/2**— $1\frac{1}{2}"$  wide  
**No. MT-2**— $2"$  wide



## No. P21 DRY WALL UTILITY SAW

Ideal for cutting outlets, pipe holes, etc. in wallboard. The sharp point easily penetrates by striking the butt of the handle — not necessary to drill first. Heavy gauge blade won't bend, and it has a full 6" cutting stroke. Also cuts plywood, masonite, and other non metallic materials.



## No. 65078-0 DISPOSABLE DUST MASK

Lightweight and comfortable. Easy to breathe through, and can be worn with eye protection devices. Includes its own rubber headband. Designed to reduce exposure to non-toxic nuisance dust and pollens. **Do not use** for protection against paint sprays and mists.

Packed 50 each masks per carton, and sold only in carton quantities.


**NEW**



## No. 275 DREMEL MOTO-TOOL

Best electrical power tool for Tile and Grout Routers. Has high speed 28,000 rpm—needed for fast cutting. Tough nylon housing has a tapered shape for easier control than with other tools. Permanently lubricated motor gives 30% more power than older models. Brushes can be removed for inspection without disassembly of tool. Double insulated and U.L. Listed for safety.  $\frac{1}{8}"$  collet, wrench, and Owner's Manual included.

**NEW**



## No. 15004 MOTO-TOOL STORAGE CASE

—Tough double wall plastic case holds Moto-Tool and accessories in separate compartments. Has convenient fold down carrying handle.



## No. 344 SCORING CUTTER

*Also Used for DegROUTing*

Used for score cutting cement based tile backer board and for degROUTing work. Preferred by many for degROUTing because handle style allows easy pulling through joint. Reversible, double edged blade has carbide tips for long life.

**No. 344-B**—Replacement Blade

## SCARIFIERS



Undercoat scratching is necessary for a good bond, and these tools make it quick and easy to do. Lightweight steel construction. Tines are high carbon spring steel for extra long life.

**No. 306**—6" wide x  $3\frac{1}{4}"$  long tines  
**No. 308**—8" wide x  $3\frac{1}{4}"$  long tines


## No. 19427 10" HALF ROUND RASP (without handle)

Ideal for corner and hole fitting on cement based tile backer boards such as Durock and Wonderboard. Has just the right cut for fast and easy stock removal. Weighs  $9\frac{1}{2}$  oz. See Page 36 for handles.



## No. 80-C MAGNETIC METAL LOCATOR

This heavy duty model is not only a stud finder, but locates other hidden items such as covered up electrical outlets. The extra powerful lifetime magnet penetrates concrete, wood, tile, plaster, etc. One of these belongs in every tool box.





# INDEX

ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE
<b>A</b>				<b>B</b>			
ADHESIVE SPRAYING	22	BAR SCRIBERS	11	MASONRY, CARBIDE TIPPED	34	SPREADERS:	
& ROLLING EQUIPMENT	22	BEATING BLOCKS	55	MASONRY, SOLID CARBIDE	34	ADHESIVE	42
ALUMINUM:		BITS:		ROUTER	36, 56	CARPET	29
DRIVES	34	MASONRY, CARBIDE TIPPED	34	BLADES:		SQUARES, CARPENTER, T-SQUARES	12, 13
SEAMING BOARD	27	MASONRY, SOLID CARBIDE	34	CARPET TRIMMER	25	SQUEEGES, TILE CLEANING	52
STRAIGHT EDGES	13, 54	ROUTER	36, 56	SABRE SAW	38, 44	SQUEEZE ROLLER	37
ANCHORS, MASONRY	33, 34, 52	BLADES:		SCRAPER	2, 16	STAIR TOOL, CARPET	28
ANKORITE TOOL & PINS	29	CARPET TRIMMER	25	SLOTTED RAZOR	24	STAIRWAY STRETCHER	31
AWLS, CARPET	30	SABRE SAW	38, 44	STRIPPER	20	STAPLE REMOVERS	32
<b>B</b>				TACKLESS STRIP CUTTER	29	STAPLERS & STAPLES	31, 32
BAR SCRIBERS	11	UTILITY KNIFE	6, 8, 9	BLADES, SAW:		STRAIGHT EDGES:	
BEATING BLOCKS	55	DIAMOND TILE	47	DIAMOND TILE	47	FOR CARPET & LINOLEUM	13
BITS:		HACKSAW	38, 44	HACKSAW	38, 44	FOR MORTAR	54
MASONRY, CARBIDE TIPPED	34	MASONRY & TILE, DRY CUTTING	47	MASONRY & TILE, DRY CUTTING	47	STRETCHER:	
MASONRY, SOLID CARBIDE	34	ROD SAW	44	ROD SAW	44	CARPET	22, 23
ROUTER	36, 56	SUPER SAW	9	SUPER SAW	9	SEAM REPAIR	31
<b>BLADES:</b>				BOTTLES, SEAM ADHESIVE	11, 26	STAIRWAY	31
CARPET TRIMMER	25	BRADS:		BRADS:		TAIL BLOCK	23
SABRE SAW	38, 44	HEADLESS STEEL	24	HEADLESS STEEL	24	TUBING	23
SCRAPER	2, 16	PUSHER	24	PUSHER	24	TUBING SUPPORTS	23
SLOTTED RAZOR	24	BROOMS	50	BROOMS	50	STRIPPER:	
STRIPPER	20	BRUSHES:		BRUSHES:		FLOOR	20
TACKLESS STRIP CUTTER	29	CONTACT CEMENT	37	CONTACT CEMENT	37	REPLACEMENT BLADES	20
UTILITY KNIFE	6, 8, 9	DUSTER	18, 50	DUSTER	18, 50	SUPER SAW KIT	9
<b>BLADES, SAW:</b>				FLOOR SWEEPING	18	SYRINGE, ADHESIVE	26
DIAMOND TILE	47	SCRUB	50	SCRUB	50	<b>T</b>	
HACKSAW	38, 44	TILE POLISHING	50	TILE POLISHING	50	T-SQUARES	13
MASONRY & TILE, DRY CUTTING	47	WIRE	53	WIRE	53	TACK BAG	30
ROD SAW	44	BUCKETS & PAILS	48	BUCKETS & PAILS	48	TACKER	32
SUPER SAW	9	<b>C</b>				TACKLESS STRIP CUTTERS	29
BOTTLES, SEAM ADHESIVE	11, 26	CANVAS TOOL BAGS	53	CANVAS TOOL BAGS	53	TACKS, CARPET LAYING	33
BRADS:		CARBIDE:		CARBIDE:		TAPE:	
HEADLESS STEEL	24	MASONRY DRILL BITS & ADAPTORS	34	MASONRY DRILL BITS & ADAPTORS	34	DOUBLE FACED CARPET	21
PUSHER	24	SCORING WHEELS	43, 44	SCORING WHEELS	43, 44	MASKING	56
BROOMS	50	CARPET:		CARPET:		PAD	21
BRUSHES:		CART	19	CART	19	STRAPPING FILAMENT	21
CONTACT CEMENT	37	CRANE	19	CRANE	19	TAPES, MEASURING	40
DUSTER	18, 50	CUTTERS	21, 23, 24, 26	CUTTERS	21, 23, 24, 26	THIMBLES, SEWING	30
FLOOR SWEEPING	18	DOLLY	19	DOLLY	19	THREAD, CARPET SEWING	30
SCRUB	50	GRABBER	31	GRABBER	31	TILE:	
TILE POLISHING	50	HAMMERS	29	HAMMERS	29	CUTTERS	1, 43, 44
WIRE	53	HANDLES	19	HANDLES	19	DOLLY	4
BUCKETS & PAILS	48	KICKER	21	KICKER	21	HAMMERS	51
<b>C</b>				KNIVES	6, 7, 24	NIPPERS	44
CANVAS TOOL BAGS	53	ROLLER	21	ROLLER	21	RACKS, PLASTIC & METAL	55
CARBIDE:		SHEARS	32	SHEARS	32	ROLLERS	3
MASONRY DRILL BITS & ADAPTORS	34	SPREADERS	29	SPREADERS	29	SAWS	45, 46, 47
SCORING WHEELS	43, 44	STAND-UP CUTTER	21	STAND-UP CUTTER	21	SPACERS	55
CARPET:		STRETCHERS	22, 23, 31	STRETCHERS	22, 23, 31	STRIKERS	54
CART	19	TRACTOR	27	TRACTOR	27	TAKE-UP TOOL	2
CRANE	19	TRIMMERS	25, 26	TRIMMERS	25, 26	TRUCK	4
CUTTERS	21, 23, 24, 26	CARPET TILE CUTTER	31	CARPET TILE CUTTER	31	TOGGLE BOLTS	52
DOLLY	19	CAULKING GUNS	55	CAULKING GUNS	55	TOOL:	
GRABBER	31	CENTER PUNCH, AUTOMATIC	51	CENTER PUNCH, AUTOMATIC	51	BOXES & BAGS	28, 53
HAMMERS	29	CERAMIC TILE:		CERAMIC TILE:		POUCHES, LEATHER	17
HANDLES	19	CUTTERS	43, 44	CUTTERS	43, 44	TILE REMOVAL	2
KICKER	21	HOLE BREAKER VISE	51	HOLE BREAKER VISE	51	TORCHES, PROPANE	15
KNIVES	6, 7, 24	HOLE CUTTERS	51	HOLE CUTTERS	51	TOWEL BARS, REPLACEMENT	56
ROLLER	21	NIPPERS	44	NIPPERS	44	TRIMMERS:	
SHEARS	32	SAWS	45, 46, 47	SAWS	45, 46, 47	CARPET	25, 26
SPREADERS	29	CHALK LINE REELS & CHALK	17	CHALK LINE REELS & CHALK	17	EDGEBANDING	37
STAND-UP CUTTER	21	CHEESECLOTH	54	CHEESECLOTH	54	PLASTIC LAMINATE	36, 37
STRETCHERS	22, 23, 31	CHISELS, TILE	51	CHISELS, TILE	51	TROUBLE LAMPS	52
TRACTOR	27	CLAW TOOL	30	CLAW TOOL	30	TROWEL NOTCHERS	42
TRIMMERS	25, 26	CLIP QUICK	17	CLIP QUICK	17	TROWELS:	
CARPET TILE CUTTER	31	COMBINATION EDGES	13	COMBINATION EDGES	13	FINISHING	42, 53
CAULKING GUNS	55	CONCRETE NAILS	34	CONCRETE NAILS	34	GAUGING (BUTTERING)	53
CENTER PUNCH, AUTOMATIC	51	CONTACT CEMENT:		CONTACT CEMENT:		HANDLES	42
CERAMIC TILE:		BRUSH	37	BRUSH	37	MARGIN	53
CUTTERS	43, 44	ROLLERS	37	ROLLERS	37	NOTCHED	41, 42
HOLE BREAKER VISE	51	COOKIE CUTTER, CARPET	29	COOKIE CUTTER, CARPET	29	POINTING	53
HOLE CUTTERS	51	COVE BASE:		COVE BASE:		SPREADERS	42
NIPPERS	44	ADHESIVE GUNS	10	ADHESIVE GUNS	10	SWIMMING POOL	53
SAWS	45, 46, 47	CORNER CUTTER	10	CORNER CUTTER	10	TILE SETTERS	53
CHALK LINE REELS & CHALK	17	GROOVING TOOL	10	GROOVING TOOL	10	TRUCKS:	
CHEESECLOTH	54	TOE TRIMMER	10	TOE TRIMMER	10	APPLIANCE	4
CHISELS, TILE	51	COVE CAP FEEDER	24	COVE CAP FEEDER	24	HAND, 2-WHEEL	4
CLAW TOOL	30	CUTTERS:		CUTTERS:		LINOLEUM	5
CLIP QUICK	17	CARPET	21, 23, 24, 26	CARPET	21, 23, 24, 26	TUFTERS, CARPET & KIT	30
COMBINATION EDGES	13	CERAMIC TILE	43, 44	CERAMIC TILE	43, 44	TURNING TOOL	30
CONCRETE NAILS	34	FEATURE STRIP	12	FEATURE STRIP	12	TURRETS, TILE SCORING	43
CONTACT CEMENT:		PLASTIC LAMINATE	35	PLASTIC LAMINATE	35	TWINE, TILE SETTERS	54
BRUSH	37	RESILIENT FLOOR TILE	1	RESILIENT FLOOR TILE	1	<b>U</b>	
ROLLERS	37	SLATE	44	SLATE	44	UNDERCUTTING SAWS	9
COOKIE CUTTER, CARPET	29	TACKLESS STRIP	29	TACKLESS STRIP	29	<b>V</b>	
COVE BASE:		<b>D</b>				<b>W</b>	
ADHESIVE GUNS	10	DIAMOND TILE CUTTING BLADES	47	DIAMOND TILE CUTTING BLADES	47	VACUUM LIFTER	55
CORNER CUTTER	10	DIVIDERS, EXTENSION	12	DIVIDERS, EXTENSION	12	<b>W</b>	
GROOVING TOOL	10	<b>E</b>				<b>WHEELS:</b>	
TOE TRIMMER	10	EDGE BANDING TRIMMER	37	EDGE BANDING TRIMMER	37	CARBIDE SCORING	43, 44
COVE CAP FEEDER	24	ELECTRIC:		ELECTRIC:		GRINDING	47
CUTTERS:		CIRCUIT ANALYZER	45	CIRCUIT ANALYZER	45	MEASURING	33
CARPET	21, 23, 24, 26	GROUND FAULT CIRCUIT INTERRUPTER	45	GROUND FAULT CIRCUIT INTERRUPTER	45	WHEELY ROLLER & CONVERSION KIT	3
CERAMIC TILE	43, 44	GLUE GUNS	26	GLUE GUNS	26	WRENCHES, ADJUSTABLE	10
FEATURE STRIP	12	HEAT GUNS	14	HEAT GUNS	14	<b>If you cannot locate the item you want,</b>	
PLASTIC LAMINATE	35	ENGRAVING TOOL	12	ENGRAVING TOOL	12	<b>don't hesitate to ask us about it because</b>	
RESILIENT FLOOR TILE	1	EXTENSION CORDS	27, 52	EXTENSION CORDS	27, 52	<b>we have many items available to us that</b>	
SLATE	44	<b>F</b>				<b>we can get for you on Special Order basis</b>	
TACKLESS STRIP	29	FASTENING TOOLS	33	FASTENING TOOLS	33		
<b>E</b>				FEATURE STRIP CUTTER	12		
<b>EDGE BANDING TRIMMER</b>				FILES	36, 42		
<b>ELECTRIC:</b>				FLOATS, GROUTING	52		
<b>CIRCUIT ANALYZER</b>				FURNITURE MOVERS	5		
<b>GROUND FAULT CIRCUIT INTERRUPTER</b>							
<b>GLUE GUNS</b>							
<b>HEAT GUNS</b>							
<b>ENGRAVING TOOL</b>							
<b>EXTENSION CORDS</b>							
<b>F</b>							
<b>FASTENING TOOLS</b>							
<b>FEATURE STRIP CUTTER</b>							
<b>FILES</b>							
<b>FLOATS, GROUTING</b>							
<b>FURNITURE MOVERS</b>							
<b>G</b>							
<b>GAUGING TROWELS</b>							
<b>GLOVES, RUBBER</b>							
<b>GLUE GUNS &amp; STICKS</b>							
<b>GOGGLES, SAFETY</b>							
<b>GROUT BAG</b>							
<b>GROUT REMOVAL TOOLS</b>							
<b>GROUT STRIKERS</b>							
<b>GROUTING FLOATS</b>							
<b>GUNS:</b>							
<b>CAULKING</b>							
<b>COVE BASE ADHESIVE</b>							
<b>GLUE</b>							
<b>HEAT</b>							
<b>H</b>							
<b>HACKSAW FRAMES &amp; BLADES</b>							
<b>HAMMERS:</b>							
<b>CARPENTER</b>							
<b>CARPET</b>							
<b>MAGNETIC TACK</b>							
<b>STAPLE</b>							
<b>HAND TRUCKS</b>							
<b>HANDY TILE TOOL</b>							
<b>HAWKS</b>							
<b>HEAT GUNS</b>							
<b>HEATER, HOT WATER</b>							
<b>HOE, MORTAR MIXING</b>							
<b>HOLE BREAKER VISE</b>							
<b>HOLE, FOR CARBIDE TOOLS</b>							
<b>HOT MELT IRON &amp; KIT</b>							
<b>HOT WATER HEATER</b>							
<b>I</b>							
<b>IRON, HOT MELT CARPET SEAMING</b>							
<b>J</b>							
<b>"J" ROLLER</b>							
<b>K</b>							
<b>KICKER, CARPET</b>							
<b>KIT, HOT MELT IRON</b>							
<b>KNEE PADS</b>							
<b>KNIVES &amp; KNIFE BLADES:</b>							
<b>CARPET</b>							
<b>LINOLEUM</b>							
<b>RAZOR BLADE</b>							
<b>UTILITY</b>							
<b>L</b>							
<b>LEATHER:</b>							
<b>BELTS</b>							
<b>KNEE PADS</b>							
<b>KNIFE &amp; TOOL POUCHES</b>							
<b>LEVELS</b>							
<b>LID-OFF</b>							
<b>LINOLEUM:</b>							
<b>DOLLIES</b>							
<b>KNIVES</b>							
<b>ROLLERS</b>							
<b>SCRIBERS</b>							
<b>SEAM CUTTER</b>							
<b>TRUCK</b>							
<b>M</b>							
<b>MAGNETIC:</b>							
<b>DRIVING BAR</b>							
<b>METAL LOCATOR</b>							
<b>NAIL HOLDER</b>							
<b>TACK HAMMER</b>							
<b>MALLETS</b>							
<b>MARGIN TROWELS</b>							
<b>MARKING GUIDE</b>							
<b>MASONRY DRILLS</b>							
<b>MEASURING TOOLS</b>							
<b>METALMITRE TOOLS</b>							
<b>MITERING JIGS</b>							
<b>MITRE BOXES</b>							
<b>MIXERS</b>							
<b>MOBILE LIFT</b>							
<b>MORTAR:</b>							
<b>BOXES</b>							
<b>MOVER</b>							
<b>STAND &amp; BOARD</b>							
<b>MOTO-TOOL</b>							
<b>MOULDING LIFTERS</b>							
<b>N</b>							
<b>NAIL HOLDER, MAGNETIC</b>							
<b>NAILS:</b>							
<b>CONCRETE</b>							
<b>DRIVE</b>							
<b>LATH</b>							
<b>FASTENING TOOL</b>							
<b>NEEDLES, CARPET SEWING</b>							
<b>NIPPERS:</b>							
<b>CERAMIC TILE</b>							
<b>CUTTING</b>							
<b>NOTCHED TROWELS</b>							
<b>NOTCHER:</b>							
<b>PLASTIC MOULDING</b>							
<b>TROWEL</b>							
<b>P</b>							
<b>PENCIL, MECHANICAL MARKING</b>							
<b>PIN VISES</b>							
<b>PLASTIC:</b>							
<b>LAMINATE SLITTERS</b>							
<b>LAMINATE TOOLS</b>							
<b>MOULDING TOOLS</b>							
<b>PLIERS:</b>							
<b>GROOVE JOINT</b>							
<b>LOCKING</b>							
<b>SLIP JOINT</b>							
<b>POINTING TROWELS</b>							
<b>POUCHES, LEATHER TOOL</b>							
<b>PROPANE TORCHES</b>							
<b>PUMP TILE SAW</b>							
<b>PUTTY KNIVES</b>							
<b>R</b>							
<b>RACKS, TILE, PLASTIC &amp; METAL</b>							
<b>RASP</b>							
<b>ROD SAWS</b>							
<b>ROLLERS:</b>							
<b>CARPET</b>							
<b>CONTACT CEMENT</b>							
<b>COUNTERTOP</b>							
<b>LINOLEUM</b>							
<b>PORCUPINE</b>							
<b>SEAM &amp; TILE</b>							
<b>SQUEEZE</b>							
<b>WALL</b>							
<b>ROUTER &amp; ROUTER BITS</b>							
<b>RUBBER MALLETS</b>							
<b>RUB BRICKS</b>							
<b>RULES, WOOD-FOLDING &amp; TAPES</b>							
<b>S</b>							
<b>SAWS:</b>							
<b>CERAMIC TILE</b>							
<b>DRYWALL UTILITY</b>							
<b>GROUT JOINT</b>							
<b>HACKSAW FRAMES &amp; BLADES</b>							
<b>UNDERCUTTING</b>							
<b>SCARIFIERS</b>							
<b>SCORING CUTTER, LAMINATE</b>							
<b>SCORING WHEELS &amp; TURRETS</b>							
<b>SCRAPERS:</b>							
<b>NOTCHED</b>							
<b>RAZOR BLADE</b>							
<b>WALL &amp; FLOOR</b>							
<b>SCREEDS</b>							
<b>SCREWDRIVERS:</b>							
<b>SINK RIM</b>							
<b>SLOTTED &amp; PHILLIPS HEAD</b>							
<b>SPIRAL RATCHET, YANKEE</b>							
<b>SCRIBE, FOR CERAMIC TILE</b>							
<b>SCRIBER SETTING GAUGE</b>							
<b>SCRIBERS, FOR LINOLEUM</b>							
<b>SEAM:</b>							
<b>ADHESIVE BOTTLES</b>							
<b>CUTTERS, CARPET &amp; LINOLEUM</b>							
<b>ROLLERS</b>							
<b>SQUEEZERS FOR CARPET</b>							
<b>SEAMING BOARDS, ALUMINUM</b>							
<b>SEWING PALMS</b>							
<b>SHARPENING STONES &amp; HOLDER</b>							
<b>SHEARS:</b>							
<b>CARPET</b>							
<b>PLASTIC LAMINATE</b>							
<b>SHOVELS</b>							
<b>SKIDS, FURNITURE MOVING</b>							
<b>SLATE CUTTER</b>							
<b>SLITTERS, PLASTIC LAMINATE</b>							
<b>SNIPS</b>							
<b>SPACERS, TILE</b>							
<b>SPONGES</b>							

If you cannot locate the item you want, don't hesitate to ask us about it because we have many items available to us that we can get for you on Special Order basis.





## QUALITY INSTALLATION TOOLS



**BENO J. GUNDLACH COMPANY**  
Belleville, Illinois 62222